


RURAL WORKS DEPARTMENT GOVT. OF BIHAR

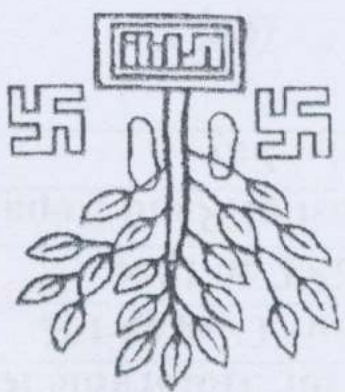

Name of Work:- NH 104 Bathana Bazar to Karbanna & (Link Road Karbanna
PMGSY to Karbanna Tola).
Block:- Sursand.

F.D.R

RS. ~~4554010.00~~ ~~4491813.00~~ 3855104.00

Year-2020-21

Name of Circle:- R.W.D, Works Circle, Sitamarhi.

Name of Division:- R.W.D., (W) Division, Pupri.

21/5/13

Schedule of Quantity

of Road:-NH 104 Bathana Bazar to Karbanna & (Link Road Karbanna PMGSY to

rbanna Tola)

Sl. No.	Description of Item	Qty	Unit	Rate	Amount
1	Sand Filling in Foundation Trenches as per Drawing & Technical Specification.	0.00	Cum	401.00	0.00
2	Providing and laying of Brick Bat obtained from Chimney with machanical means with all spreading, grading to required slope and compacted at OMC to achieve required density with all complete as per the direction of engineer in charge.	2833.8825			0.00
	Less 20% for Voids	566.7765			
		2267.1060	Cum	1546.00	3504945.876
3	Single bamboo palasiding/ walling of whole 2nd class bamboo (Jati or Bethua) 75mm dia and closely packed & driven including fitting fixing with half bamboo kamis horizontally in three rows with cane or tying with wire complete and Struts 1.5m apart longitudinally and providing brush wood as per drawing and technical specification clause 1302.5	240.00	m	172.62	41428.80
4	Providing, Laying and placing empty cement bag filled with local sand including stitching with sutall etc.do.....all complete job as per specification and direction of E/L. (including Royalty and all Taxes)	0.00	no.	23.12	0.00
5	Providing and Laying Reinforced Cement Concrete Pipe NP3 as per design in Single Row with old available pipe	20.00	m	3158.69	63173.80
6	Providing Quarry Material Rabbish for filling the voids in bricks batsdo.....all complete job as per specification and direction of E/L.	477.48			
	Taking 20% of Brick Qty for Rabbish	566.7765	Cum	742.00	420548.163

Total

4030096.64

Sav 4030097.00

1000000.00
3975055.717
3975056.00
3411596.00/-

AE

JE 21/12/2020

21/12/20

21/12/20

28.12.2020
RZ
10.12.2020

05.01.18

Details of Measurement of ditches filled by brick bats and rubbish				
Name of Road:-NH 104 Bathana Bazar to Karbanna & (Link Road Karbanna PMGSY to Karbanna Tola)				
	L	W	H	VOLUME
At ch 0.400 ch Bathnaha	12.80	5.000	0.30	19.2000
	4.50	1.500	0.30	2.0250
	4.00	3.300	0.40	5.2800
	16.50	1.000	0.35	5.7750
	30.00	4.000	0.30	36.0000
0.500km	30.00	5.670	1.40	238.1400
	11.50	5.500	1.40	88.5500
	23.00	7.200	1.50	248.4000
	27.00	6.600	1.40	249.4800
	27.00	6.000	0.50	19.5000
	6.50	6.000	0.50	19.5000
	30.00	5.000	0.40	60.0000
	10.00	3.300	0.45	14.8500
	23.00	3.000	0.30	20.7000
	10.00	3.300	0.45	14.8500
	30.00	5.000	0.40	60.0000
	6.50	6.000	0.50	19.5000
	27.00	6.600	1.40	249.4800
	23.00	7.200	1.50	248.4000
	22.00	10.750	0.60	144.9000
	10.00	3.000	0.40	12.0000
Slab Bridge Ch 1.700	30.00	4.830	1.25	181.1250
	16.30	5.000	1.00	81.5000
	14.50	4.500	0.60	39.1500
	15.00	6.500	1.80	175.5000
	15.00	6.000	2.40	216.0000
	15.00	6.200	2.50	232.5000
	15.00	5.750	1.60	138.0000
	15.00	5.550	1.20	99.9000
	15.00	3.000	0.30	13.5000
	17.00	6.500	0.90	99.4500
At Koriyahi village ch 2.800km				
	Total Quantity 2048.15			
	Less 10% Salvage 204.82			
	Total Qty 1843.33			
Karbanna PMGSY to Karbanna Tola At ch 0.100	30.00	4.000	2.10	252.0000
	30.60	4.750	2.20	313.5000
	30.00	3.100	0.60	55.8000
	5.00	3.000	0.30	4.5000
0.925 Km	15.00	3.000	0.30	13.5000
	(A+B) = Total (in Cum) 2833.8825			
	20	0	0	20.00
Laying Hume Pipe of 600 mm dia	240	0	0	240

DVA

RICT

BITATION CODE

LOCK

ROAD DETAILS

From (C hainage)

To (C hainage)

Flush Drain (C um)

Road (Connecting To

Brick Soling for Dismantling

(C Road for Dismantling

B T Road for Dismantling

Format 2 B : CD's

C D Details

Name of the Road

Existing C D:

Flush C lauseway

HP Culvert 1 Row

HP Culvert 2 Row

HP Culvert 3 Row

HP Culvert 4 Row

0.5m Span Slab Culvert

1.0m Span Slab Culvert

1.50m Span Slab Culvert

2m Span Culvert

3m Span Culvert

4m Span Culvert

5m Span Culvert

6m Span Culvert

2x6m Span Slab Culvert

Vented C auseway

Below 600mm Dia Culvert

Bridge

Prepared By

Works Division, Pupri.

Nos

f Road:-NH 104 Bathanna Bazar to Karbanna & (Link Road Karbanna PMGSY to Karbanna Tola)

f Road:-NH 104 Bathanna Bazar to Karbanna & (Link Road Karbanna PMGSY to Karbanna Tola)

Pupri

Sitamarhi