



ग्रामीण कार्य विभाग

पथ का नाम :- L-34 टक्का री सज्जनपुरा
कार्य प्रमण्डल :- बेनीपुर।
कार्य अंचल :- दरभंगा।
प्रखण्ड का नाम :- बेनीपुर।
प्राक्कलित राशि :- Rs. 548204=00 602739=00


प्रतिवेदन


पथ का नाम :- L034 टक्कना से लजनपुरा
पथ की लं० :- 3.65 KM
प्राक्कलित राशि :- Rs 598207-00


माह जुलाई अगस्त में हुई अतिवृष्टि के फलस्वरूप विभिन्न नदियों एवं नालों में आये बाढ़ के चलते अधिकांश पथ क्षतिग्रस्त हो गये एवं यातायात बाधित हो गया।

जनता की परेशानी, एवं आने वाले आम चुनाव (बिहार विधान सभा) एवं विभागीय आदेश -मु० अ०-04मु० विविध कार्य 23-40/2016-2729अनु० दिनांक-21.08.2020 के आलोक में क्षतिग्रस्त पथों के ईट टुकड़े एवं चिमनी छाई से भरकर यातायात पुर्नस्थापन किया गया। किये गये कार्य के अनुसार प्राक्कलन तैयार कर घटनोत्तर स्वीकृति हेतु समर्पित की जा रही है। कार्यहित में प्राक्कलन की स्वीकृति अपेक्षित है। ईट टुकड़ा की उपलब्धता कार्यस्थल से 8 कि०मी होने के कारण BRICK BATS के दर गणना में 8 कि०मी० लीड का प्रावधान किया गया।

प्राक्कलन को कार्य अंचल, दरभंगा द्वारा स्वीकृत अद्यतन दर के आधार पर तैयार कर अग्रेतर कार्यवाई हेतु समर्पित की जाती है।


कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा बेनीपुर,


सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल बेनीपुर,


कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल बेनीपुर,

Flood Estimate

Name of Road:- L034 Khabana to Sajanpura

Sl No	Particulars of Item	Quantity (In M ³)	Rate	Amount
1	Providing and laying Filling in ditches with brick bats including loading, unloading and light ramming all complete job. As per specification & Direction of E/I	266.79 278.08	1867.76	498300.00 519386.7008
2	Providing and laying NP3 type RCC home pipe 300 mm dia all complete job. As per specification and direction of E/I	5.0m	2000.00	10000.00

508300.00

SF 266.79 x 106.2 x 10.7 = 28360.00

Add 12% GST

1% LC

Total=

63526 60996.00

5294 5083.00

598207

Rs. 28360.00

Rs. 6,02,739.00

[Signature]

J.E

RWD, Benipur

[Signature]

A.E

RWD, Benipur

[Signature]

E.E

RWD, Benipur

कार्यपालक अभियंता और आर डि० चार्ज यन्त्रिण सप्लाय के पत्रिण २९४ (अ.३०) दिनांक २१/१२/२०२० द्वारा समर्पित गौप्य प्रविष्टि में मारवाए गए
Post facto T A for Rs. 6,02,739.00 (Rupees six lakh two thousand seven hundred thirty nine) only.

[Signature]
09.04.21

Superintendent Engineer

09/04/2021
R.W.D. (W) CIRCLE, DARGHANGA

Flood Estimate

Name of Road:- L034 Khabana to Sajanpura

Item No.1	Providing and laying Filling in ditches with brick bats including loading, unloading and light ramming all complete job. As per specification & Direction of E/I				
S.N	Chainage	Length (In M)	Average Width (In M)	Average Height (In M)	Qty
1	Ch 500-600 m	24.00	$(4.50+5.50)/2$	$(1.0+1.5)/2 \cdot 1.15$	450.00 138
2		2.50	1.50	0.20	0.75
3		6.00	1.70	$(0.2+0.3)/2$	2.55
4		49.00	4.20	$(0.2+0.4)/2$	61.74
5		11.00	0.90	0.15	1.49
6	700-800 m	1.00	1.00	0.15	0.15
7		1.00	0.90	$(0.6+1.2)/2$	0.81 72
8	1000-1100 m	1.50	0.90	$(0.8+1.2)/2$	1.35
9		2.00	$(0.6+0.9)/2$	0.15	0.22
10	1400-1500 m	2.00	$(0.7+0.9)/2$	$(0.15+0.6)/2$	0.60
11		6.00	$(1+1.4)/2$	$(0.15+0.5)/2$	2.34
12		3.30	0.50	0.15	0.25
13		1.50	0.50	$(0.15+0.25)/2$	0.15
14		2.60	0.60	$(0.15+0.3)/2$	0.35
15	1900-2000 m	8.70	$(2.30+2.80)/2$	$(0.6+1.8+2.5)/3$	34.02
16		3.60	$(1.60+2.10)/2 \cdot 1.8$	$(0.6+2)/2$	2.66 5.99
17	2200-2300 m	2.00	1.70	$(0.9+1.5)/2$	4.08
18	2700-2800 m	2.70 2.0	2.70	$(0.9+1.4)/2 \cdot 1.15$	8.38 6.21
19		1.30	1.30	0.20	0.34
20	3100-3200 m	3.00	1.00	$(0.6+0.9)/2$	2.25
21	3300-3400 m	1.50	1.20	$(1.7+2.3)/2 \cdot 1.8$	3.60 3.24
Total=					278.07 266.79

Item No.2	Providing and Laying NP3 Type RCC, HP.300 mm dia all complete job. As per specification & Direction of E/I		
S.N	Chainage (In M)	Length (In M)	Qty
1	500-600	2x2.5	5.00

[Signature]
J.E
RWD, Benipur

[Signature]
A.E
RWD, Benipur

[Signature]
E.E
RWD, Benipur

Physically verified and corrected as per site

[Signature]
07.04.20
A.E

[Signature]
E.E

Flood Estimate

Name of Road:- L034 Khabana to Sajanpura

Item No.1	Providing and laying Filling in ditches with brick bats including loading, unloading and light ramming all complete job. As per specification & Direction of E/I				
S.N	Chainage	Length (In M)	Average Width (In M)	Average Height (In M)	Qty
1	Ch 500-600 m	24.00	$(4.50+5.50)/2$	$(1.0+1.5)/2$	150.00 / 3.8
2		2.50	1.50	0.20	0.75
3		6.00	1.70	$(0.2+0.3)/2$	2.55
4		49.00	4.20	$(0.2+0.4)/2$	61.74
5		11.00	0.90	0.15	1.49
6	700-800 m	1.00	1.00	0.15	0.15
7		1.00	0.90	$(0.6+1.2)/2$	0.81 0.72
8	1000-1100 m	1.50	0.90	$(0.8+1.2)/2$	1.35
9		2.00	$(0.6+0.9)/2$	0.15	0.22
10	1400-1500 m	2.00	$(0.7+0.9)/2$	$(0.15+0.6)/2$	0.60
11		6.00	$(1+1.4)/2$	$(0.15+0.5)/2$	2.34
12		3.30	0.50	0.15	0.25
13		1.50	0.50	$(0.15+0.25)/2$	0.15
14		2.60	0.60	$(0.15+0.3)/2$	0.35
15	1900-2000 m	8.70	$(2.30+2.80)/2$	$(0.6+1.8+2.5)/3$	34.02
16		3.60	$(1.60+2.10)/2$	$(0.6+1.2)/2$	2.66 5.99
17	2200-2300 m	2.00	1.70	$(0.9+1.5)/2$	4.08
18	2700-2800 m	2.70 2.0	2.70	$(0.9+1.4)/2$	8.38 6.21
19		1.30	1.30	0.20	0.34
20	3100-3200 m	3.00	1.00	$(0.6+0.9)/2$	2.25
21	3300-3400 m	1.50	1.20	$(1.7+2.3)/2$	3.60 3.24
Total=					278.07 266.79

Item No.2	Providing and Laying NP3 Type RCC, HP.300 mm dia all complete job. As per specification & Direction of E/I		
S.N	Chainage (In M)	Length (In M)	Qty
1	500-600	2x2.5	5.00


[Signature]
J.E
RWD, Benipur

[Signature]
A.E
RWD, Benipur

[Signature]
E.E
RWD, Benipur


KHABHNA TO SAJANPURA ROAD

Latitude 26.01256

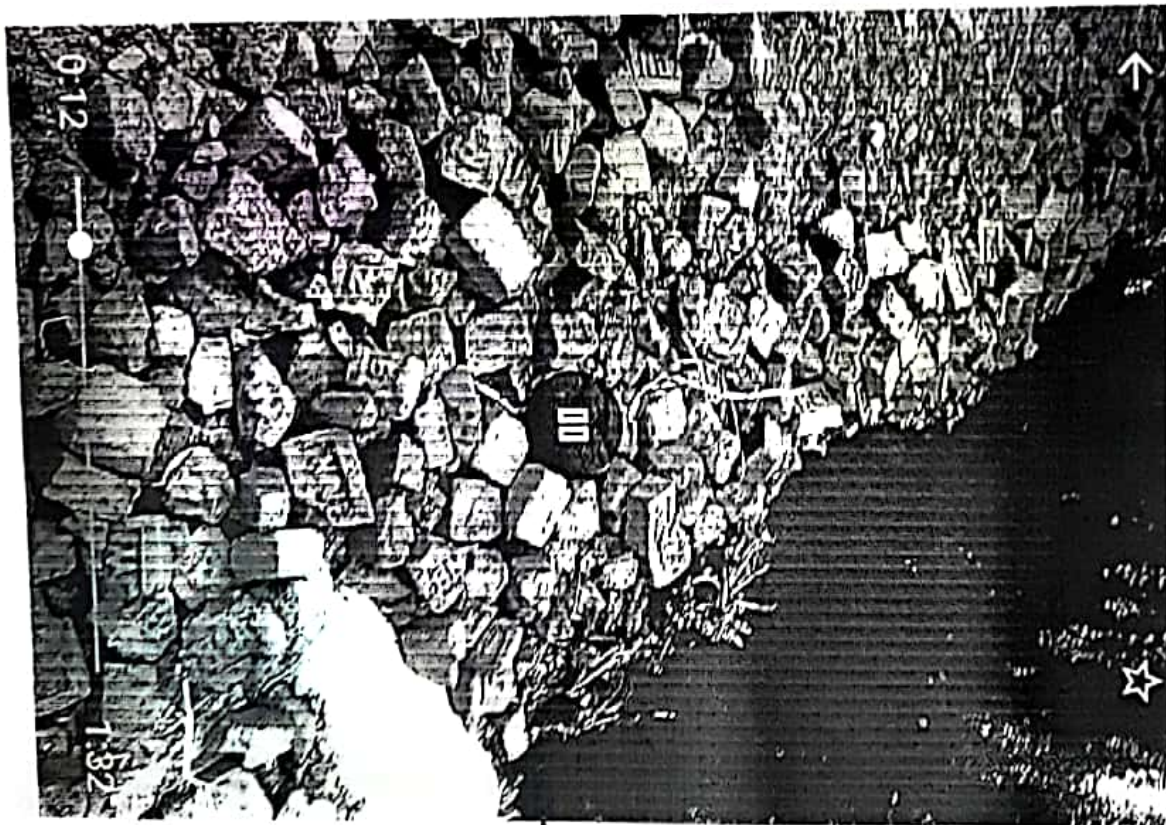



APC
2/12/2020

KHABHNA TO SAJANPURA ROAD

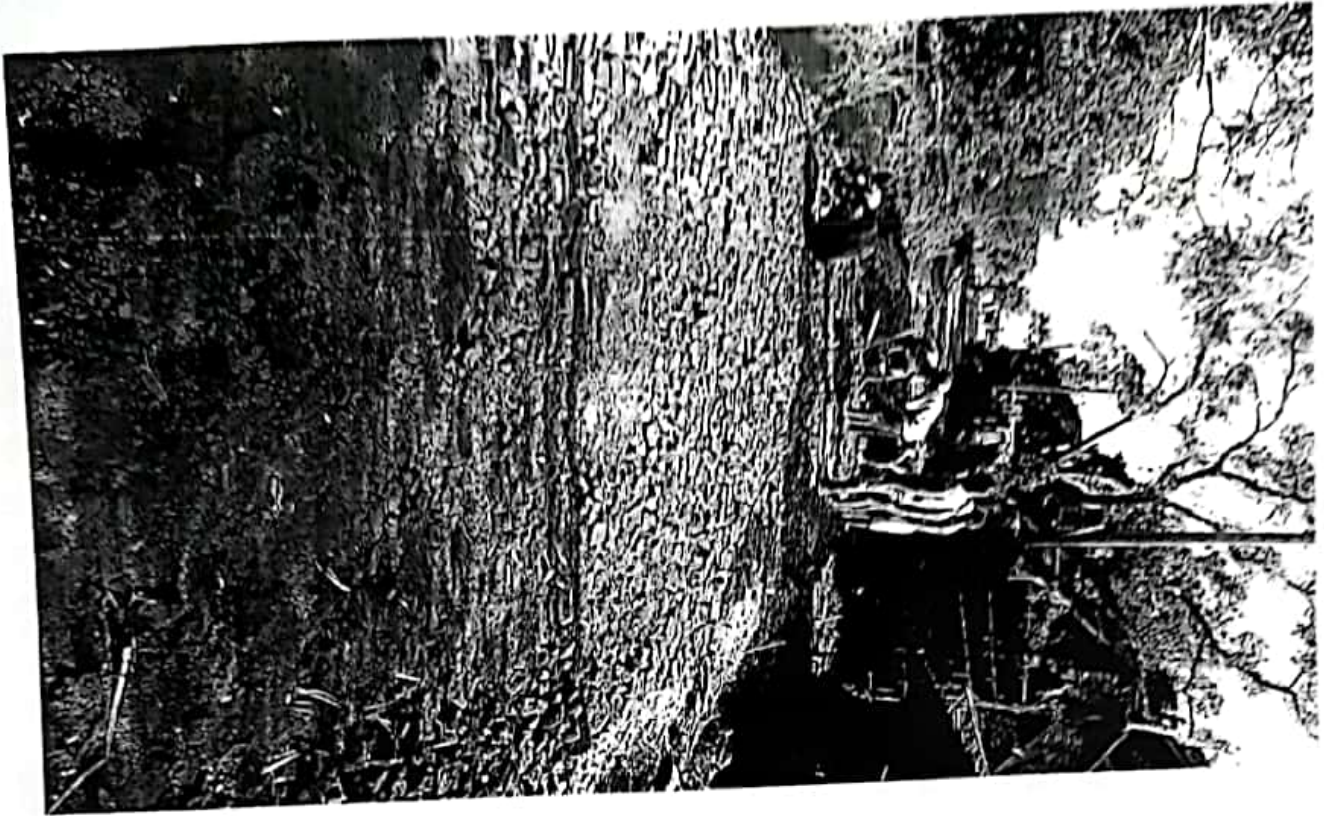


20/4/2020

KHABHNA TO SAJANPURA ROAD

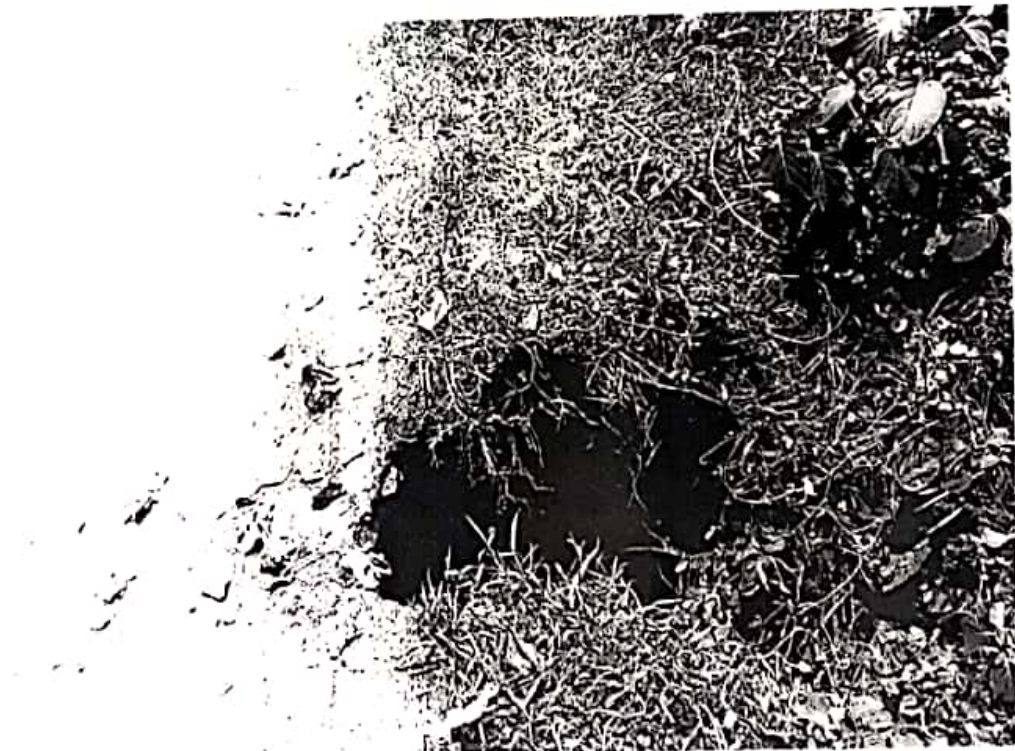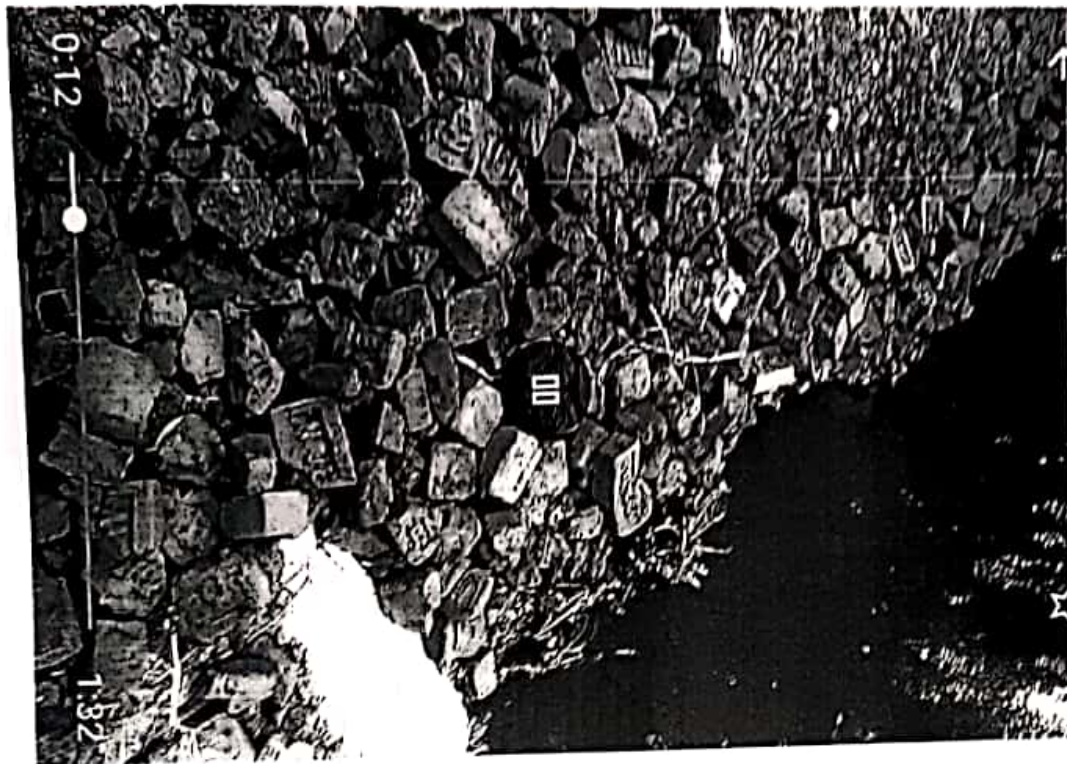


Handwritten signature and date: 2/12/2020

KHABHNA TO SAJANPURA ROAD

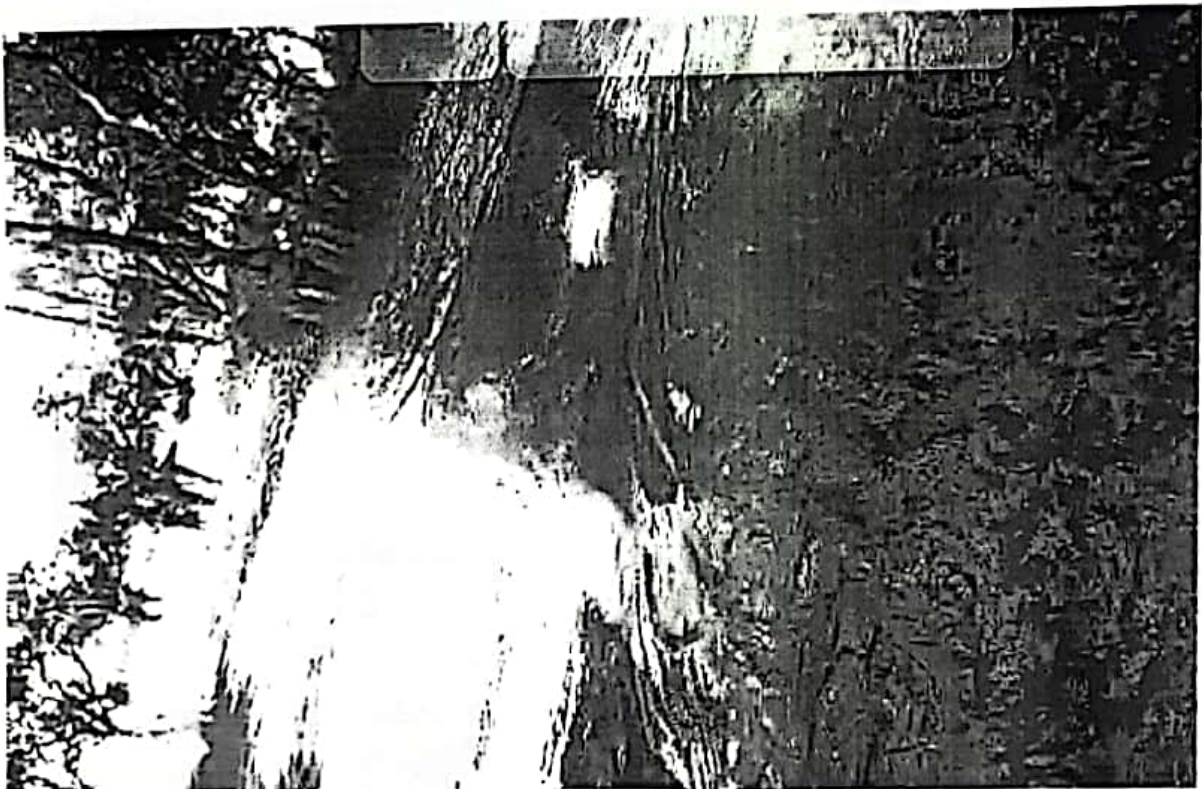

ABE
21/2/2021

KHABHNA TO SAJANPURA ROAD

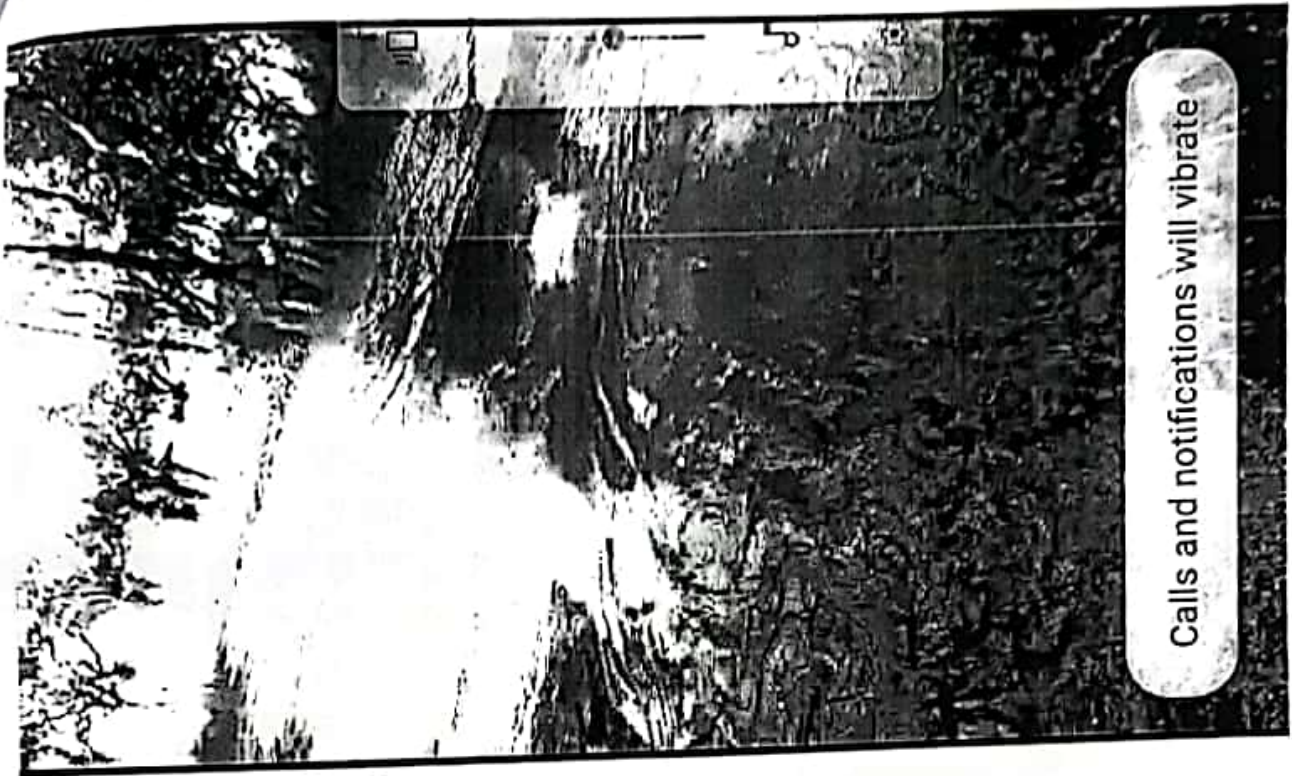

APC
21/2/2020

KHABHNA TO SAJANPURA ROAD



4/11/2020