


GOVERNMENT OF BIHAR
FDR (2020-21)

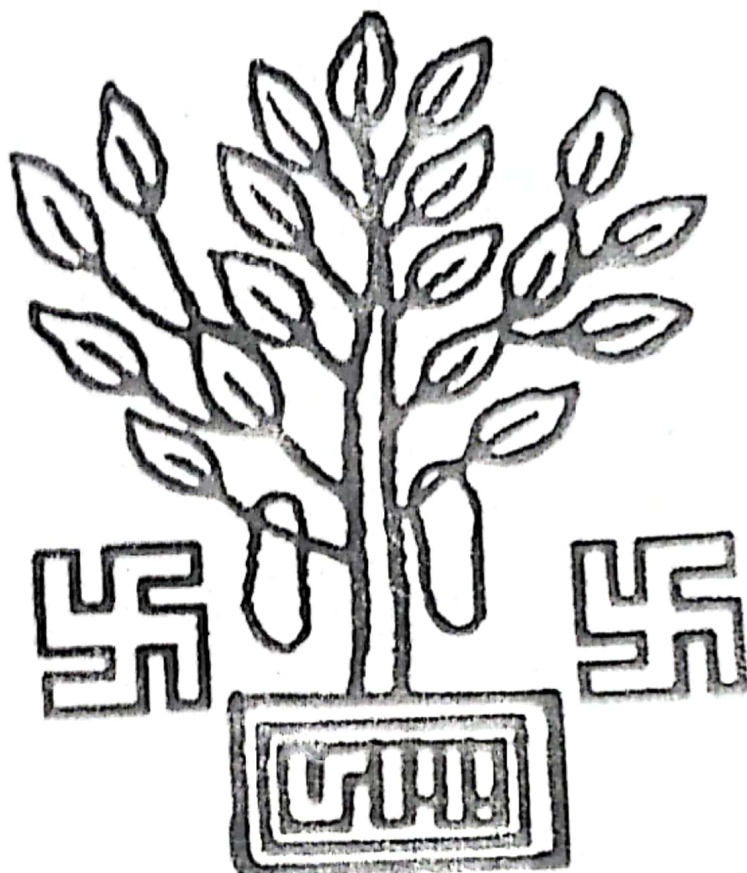

बिहार सरकार

Name of Road:- Gurhenwa Road to Balua Tola Guabari	Length-5.479 Km
Estimated Cost- Rs.:- 19,74,000.00 19,12,800.00	Block- Dhaka

Submitted By
Executive No. Engineer
R.W.D. (W) Division Dhaka

F.D.R (2020-21)

तकनीकी प्रतिवेदन

पथ का नाम :- गुरईनवा रोड से बलुआ रोला गुआवाड़ी

प्रखंड का नाम :- दाका

पथ की लम्बाई:- 5.479 कि.मी.

शीर्ष :- F.D.R. 17/12/2020


प्राक्कलित राशि:- ₹ 19,74,000/-

अनुरक्षण अवधि :- - - -

प्रस्तुत प्राक्कलन गुरईनवा रोड से बलुआ रोला गुआवाड़ी में अतिवृष्टि/बाढ़ से क्षतिग्रस्त पथाशों में यातायात पुनर्स्थापन हेतु तैयार किया गया है जिसकी प्राक्कलित राशि मो0 19,74,000/- रु0 है। प्रस्तुत प्राक्कलन सचिव ग्रामीण कार्य विभाग बिहार पटना के पत्रांक:-2254, दिनांक:-30.06.2020 के निर्देशानुसार तैयार किया गया है। पथ में अतिवृष्टि/बाढ़ के कारण क्षतिग्रस्त पथाशों में Brick Bats से मरने का प्रावधान किया गया है।

प्राक्कलन में दिये गये दर वर्तमान अनुसूचित दर के अनुरूप है।

कनीय अभियंता
ग्रामीण कार्य विभाग
कार्य प्रशाखा, दाका।


09/10/2020
सहाय अभियंता
ग्रामीण कार्य विभाग
कार्य अवर प्रमंडल, दाका


09/10/2020
कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमण्डल, दाका

**Estimate for Restoration work of Road from Gurhenwa Road to Balua Tola Guahari
for the year 2020-21 in Dhaka Block.**

Length:- 5.479 Km

SL N.	Name of Item	Unit	Quantity M ³	Rate Rs.	Amount Rs.
1	Labour for laying dry graded jhama khoe or stone filter under Bricks pitching in slope or apron including light ramming etc..... all complete as per approved design specification and direction of E/L (Brick Bat)				
	CH:-1100M to 1135M. $35.00+30.00/2 \times 4.50 + 6.50/2 \times 1.20 + 4.50 \times 1.20/3 =$		$4.50 \times 321.33 = 1441.93 \text{ M}^3$		
	CH:- 1135M to 1158M $23.00 \times 4.10 \times 0.300 =$		28.23 M^3		
	CH:- 1158M to 1188M $307 \times 4.10 + 5.50/2 \times 1.00 \times 2.50 + 1.10/3 =$		220.80 M^3		
	CH:- 1188M to 1218M $30.00 \times 4.10 \times 0.300 =$		36.90 M^3		
	Again Road Cutting D.M Motihari Vide Letter No. 2315 date 22.09.2020 S.D.O Sikrahna Dhaka Vide letter No. 1411 date 06.10.2020				
	CH:- 1120M to 1132 M $12.00 \times 4.50 + 6.50/2 \times 4.00 =$	M ³	254.00 M^3		
	Total =		931.32 M^3		
			Total=	Rs.	19,73,987.00
				Say Rs.	19,74,000.00

JE.

Signature
AE.

EE.

Per Forth A/R is accorded for Rs. 19,12,800 = ~

(.....) crore Nineteen lacs Twelve thousand

(.....) Eight hundred only.

Signature
S.E. (R.W.D.)
works Circle

Motihari
29-12-20

Inspection Report for Flood Damage Works:-

Date:-

1. Name of PIUs:- Executive Engineer, R.W.D. (W) Div,^o Dhaka
2. Name of Block:- Dhaka
3. Name of Road :- Gurhenwa Road to Babua Tola Gurd.

(A) For Road

1. Damage Location Chainage:-

2. Damage Length:- 118 m

3. Name of Damage:- Road cutting due to Flood.

4. Details of Restoration Work:-

- (i) Material being used in Restoration works:- Bitumen based
- (ii) Equipments Tools being used in restoration works:-
- (iii) Procedure take up in restoration works:- Deposition
- (iv) Restored Length:- 118 m.


Executive Engineer
R.W.D. (W) D
Raxaul