



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

BIHAR RURAL ROADS PROJECT

Bihar Rural Development Agency (BRRDA)

Head :- F.D.R.

Mukhya Mantri Gram Sampark Yojana

YEAR (2020-21)

State :-- BIHAR
District :-- Saharsa
Block :-- Nauhatta

**Detailed Estimate for Temporary Restoration of Road
from Improvement of Road from Hempur Jhingra
village to Kedli Punrawas**

Actual Length of Road	=	1.375 Km
Flood affected Length of Road	=	0.062 Km
TOTAL COST OF PAVEMENT	Rs	872,061.68
TOTAL PROJECT COST	Rs	872,061.68

Submitted By:
Executive Engineer
RWD (W) Division, Saharsa

Prepared By:
Executive Engineer
RWD (W) Division, Saharsa

प्रतिवेदन

योजना का नाम : Improvement of Road from Hempur Jhingra village to Kedli Punrawas

प्रखंड : नवहट्टा

जिला : सहरसा

पथ की कुल लंबाई : 1.375 कि.मी.

क्षतिग्रस्त पथांश की कुल लंबाई : 0.062 कि.मी.

प्राक्कलित राशि : 872061.68

इस वर्ष आये भीषण बाढ़ के कारण पथ के 62.00 मीटर लंबाई में जल के दबाव के फलस्वरूप चेनेज 350.00 से 380.00 मीटर एवं 700.00 से 732.00 मीटर पर सड़क का कटाव हो गया है। यातायात व्यवस्था चालू करने के लिए ब्रीक्स बैट भरवाया गया है जिसका प्राक्कलन कार्यपालक अभियंता ग्रामीण कार्य विभाग, कार्य प्रमंडल गोगरी से आदेशानुसार निरीक्षण कराकर वर्तमान अनुसूचित दर पर अग्रतर कार्रवाई हेतु अग्रसारित किया जा रहा है।

[Signature]
05/03/2021

कनीय अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रशाखा नवहट्टा

[Signature]
05/03/2021

सहायक अभियंता
ग्रामीण कार्य विभाग,
कार्य अवर प्रमंडल नवहट्टा

[Signature]
05/03/2021

कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, सहरसा।

SUMMARY OF COST ESTIMATE FOR THE PROJECT

NAME OF ROAD :- Improvement of Road from Hempur Jhingra village to Kedli Punrawas

DISTRICT :- Saharsa

BLOCK :- Nauhatta

Actual Length of Road :- 1.375 Km

Flood Affected Length of Road :- 0.062 Km

Sr. No.	Description	Amount (In Rs.)
1	Laying & Distribution of Brick bats on affected Road portion as per specification to meet the required slope and proper light Ramming from a specified lead as per direction of E/L.	771,736.00
	Add:-Labour Cess @1% amt. =	7,717.36
	Add:GST@12% on amt. =	92,608.32
	TOTAL RESTORATION COST OF THE PROJECT IN LACS	872,061.68

23/12/2020
Junior Engineer
RWD (W) Division, Saharsa

23/12/2020
Assistant Engineer
RWD (W) Division, Saharsa

23/12/2020
Executive Engineer
RWD (W) Division, Saharsa

Technically approved for Rs. 8,72,100.00 (Rupees eight Lac seventy two thousand one hundred only.)

23/12/2020
Superintending Engineer
R. W.D. Works Circle
SAHARSA

Estimate of Flood affected Road

Name of Road:- Improvement of Road from Hempur Jhingra village to
Kedli Punrawas

BLOCK :- Nauhatta

District:- Saharsa

SUB HEAD : BRICK BATS

Laying & Distribution of Brick bats on affected Road portion as per specification to meet the required slope and proper light Ramming from a specified lead as per direction of E/L.

Sl. No.	Description	Unit	Nos.	Length (m)	Width (m)	Height / Thickness (m)	Quantity (m ³)	Rate (In Rs.)	Amount (In Rs.)
1	As per Annexure-A attached.						411.600	1,874.97	7,71,736.00
							411.600		

TOTAL COST OF PAVEMENT IN RS. = 7,71,736.00

24/10/2020
Junior Engineer
RWD (W) Division, Saharsa

23/10/2020
Assistant Engineer
RWD (W) Division, Saharsa

23/10/2020
Executive Engineer
RWD (W) Division, Saharsa

CALCULATION SHEET

Annexure-A

Name of Road:- Improvement of Road from Hempur Jhingra village to Kedli Punrawas

Block:- Nauhatta

Length of Road:- 1.375 Km

District:- Saharsa

S.No.	Chainage	Unit	Nos.	Length(m)	Avg.width (m)	Width (m)	Avg.height (m)	Height/ Thicknes(m)	Quantity (m3)
1	CH:-350.00 to CH:-380.00	Cum	1	30.00	$\text{Avg}(7.90+6.90+6.20)/3$	7.000	$\text{Avg}(1.10+0.70+1.20)/3$	1.000	210.000
2	CH:-700.00 to CH:-732.00	Cum	1	32.00	$\text{Avg}(7.60+7.40+6.00)/3$	7.000	$\text{Avg}(1.30+1.10+0.30)/3$	0.900	201.600

Total wash out qty in cum = 411.600

62.00

[Signature]
23/12/2020
Junior Engineer

RWD (W) DIVISION,SAHARSA

[Signature]
23/12/2020
Asstt. Engineer

RWD (W) DIVISION,SAHARSA

[Signature]
23/12/2020

Executive Engineer

RWD (W) DIVISION,SAHARSA

Analysis for Carriage

Name of Road:- Improvement of Road from Hempur Jhingra village to Kedli Punrawas
Block :- Nauhatta
District:- Saharsa

Flood affected Length of the Road:- 0.062 KM
Actual Length of the Road:- 1.375 Km

Sl No	Item	Unit	Source	Carriage Cost & Lead in Km		Loading & Unloading Cost	Carriage Cost by Rail Head	Total
				Pucka / Surface	Kuchcha / Surface			

1	Brick Bats	283	Local	$\frac{3.60}{2.25} \times 18.58 \times 5.00 \text{ Km} = \text{Rs } 148.64$	$\frac{3.60}{2.25} \times 29.03 \times 2.00 \text{ Km} = \text{Rs } 92.90$	184.38		425.92
---	------------	-----	-------	---	--	--------	--	--------

* Subjected to Verification of Lead

Cost of Haulage Excluding Loading & Unloading as per SOR

Type of Road	Per Ton. Km by Tractor
For Surface Road	18.58
Unsurface Gravel Road	23.21
Kachha Road	0.00


 Junior Engineer
 RWD (W) Division, Saharsa


 Asstt. Engineer
 RWD (W) Division, Saharsa

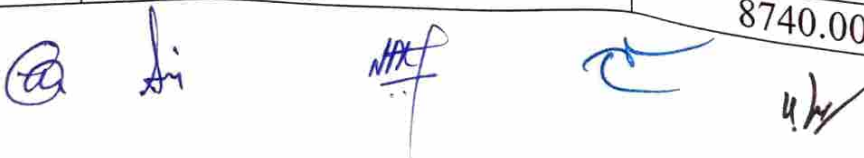

 Executive Engineer
 RWD (W) Division, Saharsa

अधीक्षण अभियंता का कार्यालय,
ग्रामीण कार्य विभाग, कार्य अंचल, सहरसा।

संयुक्त जांच प्रतिवेदन

ग्रामीण कार्य विभाग, कार्य प्रमंडल, सहरसा के अंतर्गत महिषी एवं नवहट्टा प्रखंड में वर्ष 2020 के बाढ़ से क्षतिग्रस्त पथों को मोटरेबल करने के पश्चात् अधोहस्ताक्षरी की उपस्थिति में संयुक्त रूप से कनीय अभियंता, सहायक अभियंता एवं कार्यपालक अभियंता ग्रामीण कार्य विभाग, कार्य प्रमंडल, सहरसा के द्वारा किए गए मोटरेबल पथ की जांच हेतु विभागीय पत्र सं.मु0अ0-4(मु0)- 2245-14-18/2021-1507 date:-07.06.2021 के आलोक में date:- 09.06.2021 एवं date:-18.06.2021 को स्थल निरीक्षण किया गया जिसमें पथ में किए गए कार्य को प्राक्कलन के अनुरूप पाया गया। कार्य की वर्तमान स्थिति संतोषजनक एवं सभी पथ मोटरेबल है।


क्रम संख्या	पथ का नाम	चैनेज मीटर में	क्षतिग्रस्त पथों की लंबाई मीटर में
1.	HempurJhingha Village to KedliPunarwas	350.00	30.00
		700.00	32.00
2.	Md. Alminkeghar to Sattor Goth JaleshwarYadavkeGhartak	1150.00	13.00
		1485.00	15.00
		1500.00	7.00
3.	T01 to YogeshwarYadavtolaRasalpur	400.00 (Village side)	51.70
		400.00 (River side)	51.70
4.	Birjain to Bhelahi Boarder	6198.00	2.00
		7200.00	2.00
		7575.00	32.00
		7636.00	15.00
		7710.00	13.00
		7951.00	12.00
		7990.00	2.00
		8060.00	2.00
		8550.00	4.00
		8582.00	2.00
		8643.00	2.00
		8740.00	10.00



		8800.00	9.00
		1500.00	7.60
		1530.00	18.00
		1570.00	15.00
		2050.00	14.50
		2080.00	4.00
		2170.00	4.00
		2170.00	3.60
		2170.00	9.10
		2170.00	10.50
		2170.00	11.10
		2340.00	7.00
		2380.00	6.00
		2950.00	8.60
		3050.00	15.50
			2.50
			1.00
			3.00
			9.00
			15.00
			22.50
			14.50
			9.80
			11.70
			8.70
			4.80
			19.20
			5.50
			7.60
			2.00
			5.70
			8.70
			6.30
			12.70
			9.80
			4.40
5.	Gram Panchayat Aina Main road to Darbhanga Boarder		
6.	Kandaha to Sundarwan	150.00-1150.00	







			2.00
		1000.00	3.00
			30.00
			30.00
			30.00
			30.00
			30.00
			30.00
			30.00
			25.00
		2830.00	40.00
			11.10
			6.40
			13.40
			18.00
			14.80
			12.60
			13.90
			10.00
			18.10
			56.70
		6200.00-7800.00	12.50
			12.30
			46.00
			17.00
			45.90
			19.00
			60.00
			8.50
			20.60
		6200.00-7800.00	14.00
8.	Lilja to Telwa	430.00	54.30
		481.00	7.00
		492.00	17.50
		537.00	16.00
		605.00	20.00
9.	Balia to Kurgaon		

@

di

MM

✓

✓

		625.00	20.00
10.	Simar to West Muslim tola	0.00-300.00	25.00
			5.50
			6.00
			30.00
			5.00
		1135.00	27.50
		1833.50	44.50
		25.30	25.30
11.	MahishiPrakhandAntargatJajauri Main road to Nayanagar		
12.	X road L036 to Arraghat	1800.00	30.00
		1900.00	45.00
		1975.00	51.00
13.	Rasalpur to Naulatak	1350.00 – 1379.85	29.85
		1860.00 – 1948.90	88.90

Chander
18.06.21

कनीय अभियंता
कार्य प्रशाखा
महिषी।

Di
18/6/21

कनीय अभियंता
कार्य प्रशाखा
नवहट्टा

NAF
18/6/21

सहायक अभियंता
कार्य अवर प्रमंडल, महिशी/नवहट्टा

Chander
18/6/21

कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, सहरसा।

NAF
18/6/21

अधीक्षण अभियंता,
ग्रामीण कार्य विभाग,
कार्य अंचल, सहरसा।