



Abstract of cost for Restoration work of Amba South to Amba North Road after flood 2020

Sl. No.	Item of work	Unit	Quantity	Rate	Amount
1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.				
	(a) Bricks bat	cum	354.2	1546.00	547593.00
	(b) Rubbish	cum	88.55	742.00	65704.00
2	Local sand filling in road embankment with lead up to 1 K.M.	cum	572	401.00	229372.00
Total					842669.00
Add 1% labour Cess					8427.00
Add 12% GST					101120.00
Grand Total					952216.00
Say Rs					952210.00


J.E.


A.E.


E.E.

यह प्रमाणित अधीक्षण अनियंता कार्य अंशव सीतामढ़ी द्वारा
गठित बोच हेम (कार्यपासक अनियंता सीतामढ़ी) के बीच प्रतिवेदन
254/29-1-21


Technically Approved for Rs 952210.00 (Rupees Nine
lakh fifty two thousand Two hundred ten) only.



S.E.
R.W.D. (W) Circle
Sitamarhi

Detailed Estimate of Restoration work of road from Amba South to Amba North Road after flood 2020

sl no. 1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.					
	from chainage in M	to chainage in M	length in M	width in M	depth in M	Quantity in CUM
1	3045	3100.00	55	$(6.0+5.50)/2$	1.4	442.75
						442.75
(a)	Brick Bats 80%					354.20
(b)	Rubbish 20%					88.55
sl no. 2	Local sand filling in road embankment with lead up to 1 K.M.					
	from chainage in M	to chainage in M	length in M	width in M	depth in M	Quantity in CUM
1	3045	3100.00	55	$(7.0+6.0)/2$	1.6	572
						572.00


J.E.


A.E.

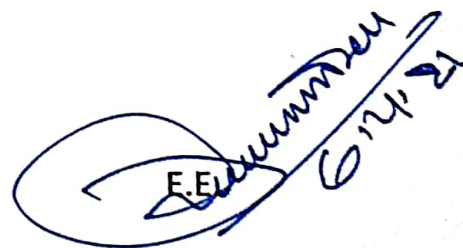
E.E.