



Abstract of cost for Restoration work of Bairia to Ganeshpur after flood 2020.					
Sl. No.	Item of work	Unit	Quantity	Rate	Amount
1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.				
	(a) Bricks bat	cum	285.65	1546.00	441615.00
	(b) Rubbish	cum	71.41	742.00	52986.00
			Total		494601.00
			Add 1% labour Cess		4946.00
			Add 12% GST		59352.00
			Grand Total		558899.00
			Say Rs		558890.00



J.E.


A.E.


E.E.


यह प्रकलन आवधिक अनियंता कार्य अंदाज सीतामही द्वारा अति
अधिकृत (कार्यपालक अनियंता सीतामही) के अति सतिवेदन
254/29-1-21


Technically Approved for Rs 558890.00 (Rupee & Five
lakh fifty eight thousand Eight hundred Ninety)
only.

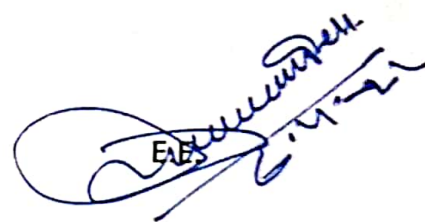

S.E.
R.W.D. (w) Circle
Sitamashi

Detailed Estimate of Restoration work of Bairia to Ganeshpur after flood 2020.

sl no. 1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/l.					
	from chainage in M	to chainage in M	length in M	width in M	depth in M	Quantity in cum
	585	667	82.00	2.10	0.50	86.10
	690	750	60.00	2.30	0.50	69.00
	770	804	34.00	2.00	0.45	30.60
	840	896	56.00	2.60	0.60	87.36
	920	960	40.00	2.80	0.75	84.00
						357.06
(a)	Brick Bats 80%					285.65
(b)	Local Sand/ Rubbish 20%					71.41


J.E.


A.E.


E.E.