
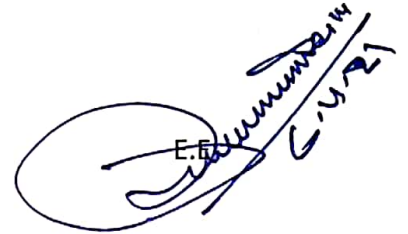


**Abstract of cost for Restoration work of road from Sheohar to Pardeshiya after flood
2020**

Sl. No.	Item of work	Unit	Quantity	Rate	Amount
1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.				
	(a) Bricks bat	cum	1189.31	1546.00	1838673.00
	(b) Rubbish	cum	297.33	742.00	220619.00
Total					2059292.00
Add 1% labour Cess					20593.00
Add 12% GST					247115.00
Grand Total					2327000.00
Say Rs					2327000.00


J.E.


A.E.


E.E.

यह प्रचलन अर्थात् शोधन अभियंता कार्य अर्थात् सीतामढ़ी द्वारा
वाहित बांधव (प्रतिपाद्य अभियंता सीतामढ़ी) के आधे
प्रतिवेदन
254/28-1-21


Technically Approved for Rs 2327000 = (Rupees
Twenty Three Lakh Twenty Seven Thousand) only.

25/4/21
S.E.
R.W.D. (W) Circle
Sitamarhi

Detailed Estimate of Restoration work of road from Sheohar to Pardeshiya after flood 2020

sl no. 1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.						
	from chainage in M	to chainage in M	length in M	width in M	depth in M		Quantity in CUM
1	1100	1108	8.00	4.4	0.3		10.56
2	1150	1160	10.00	3.7	0.4		14.80
3	1210	1230	20.00	3.7	0.25		18.50
4	1270	1292	22.00	2.5	0.25		13.75
5	1380	1476	96.00	4	0.4		153.60
6	1500	1680	180.00	3.9	0.25		175.50
7	1805	1833	28.00	4.2	0.4		47.04
8	2000	2060	60.00	4.3	0.3		77.40
9	2110	2140	30.00	3	0.3		27.00
10	2200	2225	25.00	4.2	0.3		31.50
11	2510	2570	60.00	3.2	0.3		57.60
12	3100	3160	60.00	3.7	0.4		88.80
13	3200	3230	30.00	3.9	0.4		46.80
14	3280	3370	90.00	3.5	0.3		94.50
15	3390	3515	125.00	3.4	0.3		127.50
16	3700	3845	145.00	3.8	0.3		165.30
17	3950	3985	35.00	4	0.3		42.00
18	4100	4112	12.00	4.5	0.6		32.40
19	4250	4310	60.00	4.4	0.3		79.20
20	4320	4390	70.00	4	0.5		140.00
21	4430	4440	10.00	2.5	0.45		11.25
22	4660	4674	14.00	2.6	0.5		18.20
23	4700	4708	8.00	4.2	0.4		13.44
							1486.64
(a)	Brick Bats 80%						1189.31
(b)	Local Sand/ Rubbish 20%						297.33


J.E.


A.E.


E. Kumar
6.11.21