

Abstract of cost for Restoration work of road from Dosti Mohammadpur To Barahi Jagdishpur after flood 2020

Sl. No.	Item of work	Unit	Quantity	Rate	Amount
1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.				
	(a) Bricks bat	cum	179.44	1546.00	277414.00
	(b) Rubbish	cum	44.86	742.00	33286.00
Total					310700.00
Add 1% labour Cess					3107.00
Add 12% GST					37284.00
Grand Total					351091.00
Say Rs					351090.00



J.E



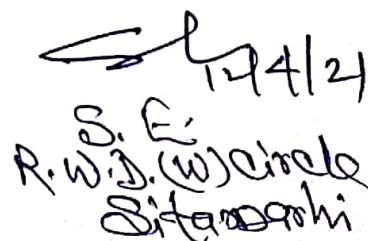
A.E.



यह याचकन अधीक्षण अभियंता कार्य अंशुल सुतामदी द्वारा गहित
जोखदले (कार्यपालक अभियंता सुतामदी) के जॉयसंविहिन

254/28-1-21


Technically Approved for Rs 351090=00 (Rupees Three
lakh Fifty one thousand Ninety) only.


S. E.
R.W.D. (W) Circle
Sikarohi

Detailed Estimate of Restoration work of road from Dosti Mohammadpur To Barahi Jagdishpur after flood 2020

sl no. 1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.					
	from chainage in M	to chainage in M	length in M	width in M	depth in M	Quantity in CUM
1	1200	1330	130	3.2	0.3	124.80
2	1600	1607.3	7.3	3.5	2	51.10
3	1800	1822	22	2.2	1	48.40
						224.30
(a)	Brick Bats 80%					179.44
(b)	Local Sand/ Rubbish 20%					44.86


J.E.


A.E.


J.E.