



बिहार सरकार ग्रामीण कार्य विभाग

अंचल परिक्षेत्र :- ग्रामीण कार्य अंचल, सीतामढ़ी

कार्य प्रमण्डल शिवहर
प्रखण्ड:- डुमरी कटसरी

कार्य का नाम : नयागांव रामाशंकर सिंह के घर से परसौनी सीमा भाया
नयागांव हाजी टोला पथ में वर्ष 2020 में आये बाढ़ से
क्षतिग्रस्त पथ का मरम्मत कार्य ।

प्राक्कलित राशि : ₹ 312360.00

वित्तीय वर्ष : 2020 -21

प्रतिवेदन

प्रस्तुत प्राक्कलन, कार्य प्रमण्डल, शिवहर के अंतर्गत पडने वाले पथ नयागांव रामाशंकर सिंह के घर से परसौनी सीमा भाया नयागांव हाजी टोला पथ की 2020 में आये बाढ़ के उपरान्त इस सड़क के क्षतिग्रस्त भाग की मरम्मत के लिए मात्र रु0 312360.00 का तैयार किया गया है।


विभागीय पत्रांक :- 2521 दिनांक:-05/08/2020 एवं विभागीय पत्रांक :- मु0 अ0- 04 (मु0) विविध (कार्य) - 23-40/16-2145 दिनांक:-25/06/2020 के आलोक में शिवहर जिला में सन 2020 में आये बाढ़ / अतिवृष्टि से क्षतिग्रस्त पथांश में यातायात पुनर्स्थापन हेतु तैयार किया गया है।

जनहित में इस पथ को मोटरेबल करना अतिआवश्यक था। प्रस्तुत प्राक्कलन में वर्णित दर वर्तमान अनुसूचित दर पर आधारित है।


प्राक्कलन की स्वीकृति अपेक्षित है।



कनीय अभियंता
अवर प्रमंडल डुमरी कटसरी



सहायक अभियंता
अवर प्रमण्डल डुमरी कटसरी

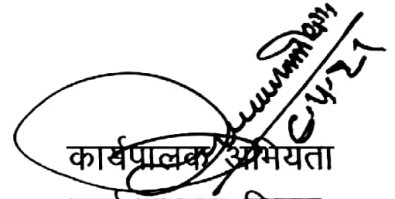

कार्यपालक अभियंता
कार्य प्रमण्डल शिवहर

**Abstract of cost for Restoration work of Nayagaon Ramashankar Singh house to Parsouni
Sima Via Nayagaon Haji Tola after flood 2020.**

Sl No.	Item of work	Unit	Quantity	Rate	Amount
1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.				
	(a) Bricks bat	cum	159.65	1546.00	246819.00
	(b) Rubbish	cum	39.91	742.00	29613.00
Total					276432.00
Add 1% labour Cess					2764.00
Add 12% GST					33172.00
Grand Total					312368.00
Say Rs					312360.00



J.E.


A.E.




यह प्राचलून अवस्थामें अनियंता कार्य अंशस सीतामही द्वारा
गदित अस्थिहव (अनियंता अनियंता सीतामही) के अस्थिप्रतिपेक्षा
254/29-1-21

Technically Approved for Rs 312360.00 (Rupees Three
lakh Twelve thousand Three hundred Sixty/only.


S.E.
R.W.D. (W) Circle
Sitamarhi

Detailed Estimate of Restoration work of road from Nayagaon Ramashankar Singh house to Parsouni Sima Via Nayagaon Haji Tola after flood 2020

sl no. 1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.						
	from chainage in M	to chainage in M	length in M	width in M	depth in M		Quantity in CUM
1	180	188	8.00	2.6	0.45		9.36
2	260	272	12.00	3.9	0.5		23.40
3	425	455	30.00	3.5	0.3		31.50
4	640	654	14.00	3.8	0.45		23.94
5	1080	1095	15.00	2.5	0.3		11.25
6	1220	1238	18.00	2.7	0.3		14.58
7	1305	1319	14.00	3	0.45		18.90
8	1480	1500	20.00	3.3	0.4		26.40
9	1520	1538	18.00	2.8	0.3		15.12
10	1620	1637	17.00	3.1	0.3		15.81
11	1680	1690	10.00	3.1	0.3		9.30
							199.56
(a)	Brick Bats 80%						159.65
(b)	Local Sand/ Rubbish 20%						39.91


J.E. 6-4-21


A.E. 06.4.21


6.4.21