
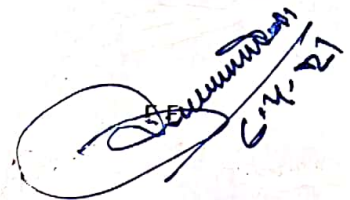


Abstract of cost for Restoration work of Sivhar to Bishunpurman after flood 2020

Sl. No.	Item of work	Unit	Quantity	Rate	Amount
1	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.				
	(a) 72% of bricks bat	cum	213.44	1546.00	329978.24
	(b) 28% of Rubbish	cum	53.36	742.00	39593.12
Total					369571.36
Add 1% labour Cess					3695.71
Add 12% GST					44348.56
Grand Total					417615.64
Say Rs					417610.00



J.E.


A.E.


S.E.


यह प्रारम्भिक अर्थोपस्थापना कार्य अन्तर्गत सीतामढ़ी द्वारा गठित
अर्थोपस्थापना (कृषिप्राप्तक अर्थोपस्थापना सीतामढ़ी) के अर्थ प्रसिद्धि
254/29-1-21


Technically Approved for Rs 417610 = 00 (Rupees four
lakh Seventeen thousand Six hundred Ten) only.


S.E.
R.W.D.(w) Circle
Sitamarhi

Detailed Estimate of Restoration work of Restoration work of Sivhar to Bishunpurman after flood 2020.

sl no.	Supplying & filling of brick bats with manual compactiondo....do all complete job as per direction of E/I.					
1	from chainage in M	to chainage in M	length in M	width in M	depth in M	Quantity in CUM
1	960.00	965	5.00	2.10	0.45	4.73
2	1280.00	1304	24.00	4.20	1.2	120.96
3	2100.00	2154	54.00	3.30	0.6	106.92
4	2154.00	2172	18.00	3.80	0.5	34.20
						266.81
	(a)				Brick Bats 80%	213.44
	(b)				Rubbish 20%	53.36


J.E.


A.E.


S. 4.021