

ABSTRACT

Road Name- Temporary Restoration of Road from NH-57 To Narkatiya

Block-DARBHANGA

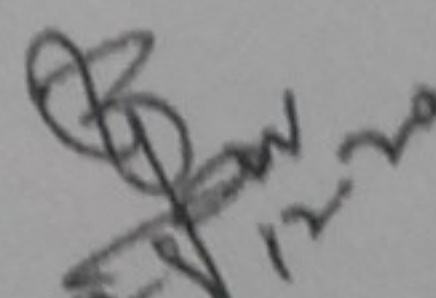
RWD (W) DIVISION DARBHANGA -1

Road Actual Length - 0.750 KM

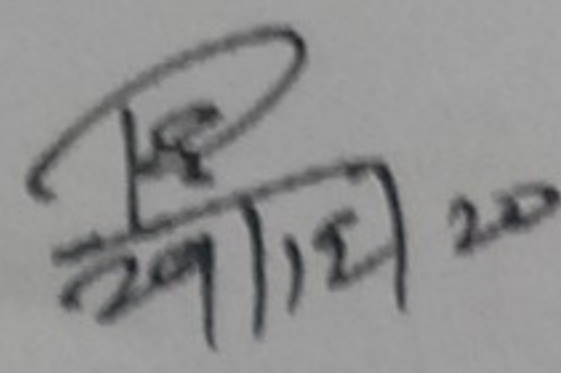
Efected Road Length - 201.60 M.

S.No.		UNIT	QUANTITY	RATE	AMOUNT (Rs)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I .	CUM	221.917	1867.76	414488
	Add G.S.T. 12 %				49739
	Add 1 % Labor cess				4145
	Seigniorage Fee @1063.00/cum x0.10				23590
					491961

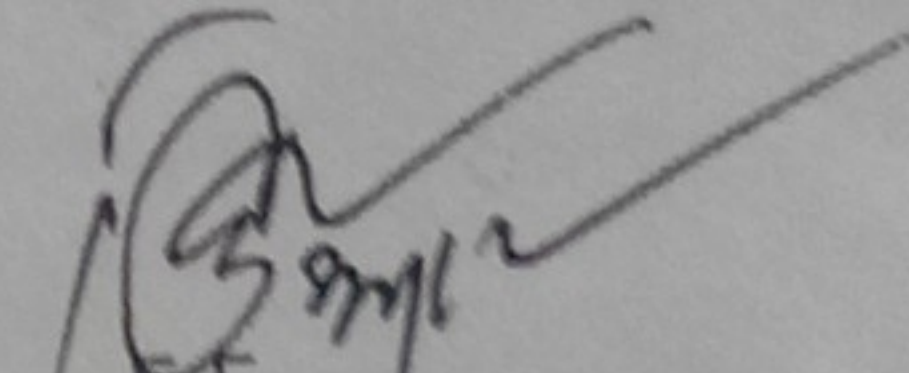
Rs- 4,91,961 =


J.E.

Work Section Darbhanga-2

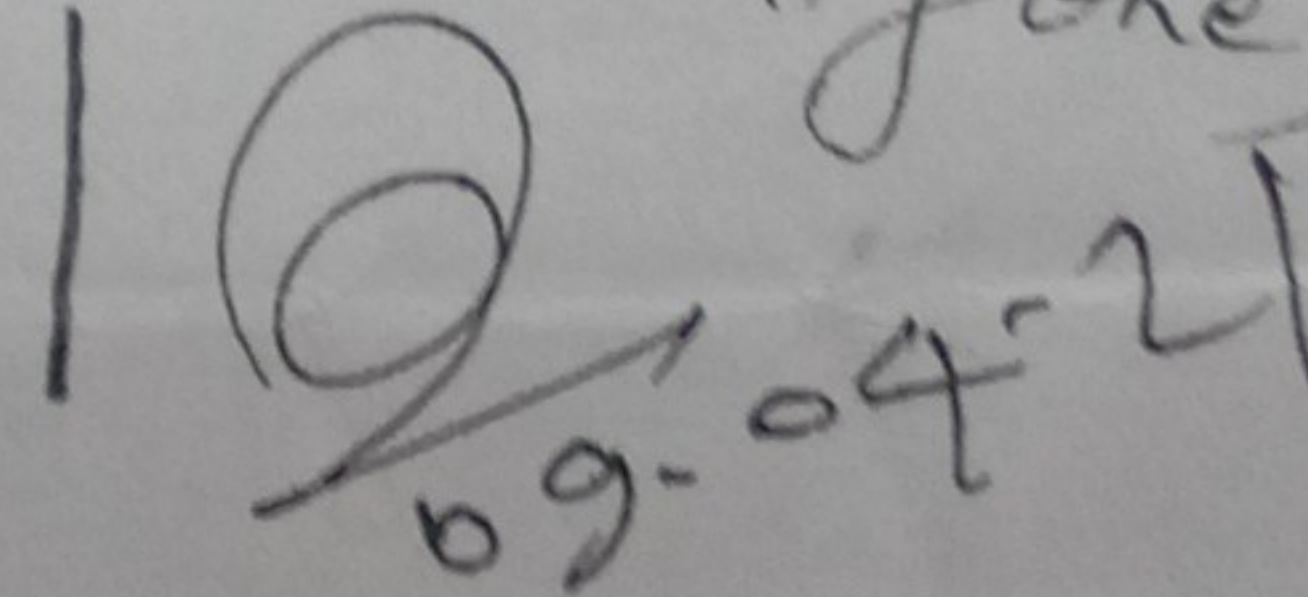

A.E.

Work Sub-Division
Darbhanga


E.E.

RWD Darbhanga -1

कार्यपालक अभियंता ग्राहक का वि. कार्य प्रमंडल - फुलपरास के पत्रिक 542 अंकुश /
दिनांक 07/04/2021 / के द्वारा समाप्त भौच प्रतिवेदन के आधार पर।
Post-Facto T/A for Rs- 4,91,961 = (Rupees Four Lacs-
Ninetyone thousand Nine hundred Sixty one) only.

1 
09-04-21
Superintending Engineer
RWD, Works Circle, Darbhanga
09/04/2021

Detailed Estimate for Temporary Restoration of NH-57 to Narkatiya for the year 2020 - 21.

* Darbhanga

Total Restoration Length - 322.05 M

R.W. Division - Darbhanga -1

Length: 0.750 km

item	No.	Length (M)	Width(M)	Depth (M)(AV)	Quantity (cum)
1 Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I .					
Chainage in M					
0	1	16.50	1.00	0.250	4.125
	1	2.00	0.70	0.225	0.315
	1	3.00	1.20	0.225	0.810
	1	1.00	0.45	0.150	0.068
100	1	4.00	0.45	0.200	0.360
	1	4.50	1.70	0.200	1.530
	1	20.00	1.00	0.150	17.925
	1	4.00	1.10	0.150	0.660
300	1	18.00	1.25	0.225	5.063
	1	5.00	1.25	0.225	3.281
	1	7.00	1.50	0.175	1.838
	1	2.10	1.20	0.150	0.378
	2	12.00	1.25	0.200	6.000
	1	14.00	1.00	0.150	2.100
400	1	40.00	2.25	0.175	15.750
	1	16.00	2.40	0.225	8.640
	1	0.45	2.25	0.225	0.506
Near Boring	1	4.50	1.10	0.150	0.557
Water Tank	1	19.00	(1.00+1.50)/2	(0.25+0.75)/2	11.875
East	1	25.00	0.90	0.450	10.125
"	1	32.00	1.25	(0.30+0.75)/2	21.000
West	1	37.00	1.50	0.900	49.950
550 M Near school	1	35.00	(4.50+3.00)/2	(0.60+0.30)/2	59.063
Total Qty.					221.917

J.E.

A.E.

E.E.

RWD(W) Division Darbhanga -1