


**Abstract of cost for Restoration work of Dhankaul Mohanpur PMGSY Path se  
Dakshinwari Tola after flood 2020.**

| Sl. No.            | Item of work                                                                                                    | Unit | Quantity | Rate    | Amount    |
|--------------------|-----------------------------------------------------------------------------------------------------------------|------|----------|---------|-----------|
| 1                  | Supplying & filling of brick bats with manual compaction ....do....do all complete job as per direction of E/I. |      |          |         |           |
|                    | (a) Bricks bat                                                                                                  | cum  | 334.67   | 1546.00 | 517400.00 |
|                    | (b) Rubbish                                                                                                     | cum  | 83.67    | 742.00  | 62083.00  |
| Total              |                                                                                                                 |      |          |         | 579483.00 |
| Add 1% labour Cess |                                                                                                                 |      |          |         | 5795.00   |
| Add 12% GST        |                                                                                                                 |      |          |         | 69538.00  |
| Grand Total        |                                                                                                                 |      |          |         | 654816.00 |
| Say Rs             |                                                                                                                 |      |          |         | 654810.00 |

  
J.E.

  
A.E.

  
S.E.

यह प्रारबन्धन अधीक्षण अभियंता कार्य अंशुष सीतामढ़ी द्वारा  
गृहित आचदल (कसपासक अभियंता सीतामढ़ी) के अधि  
प्रतिवेदन  
254/28-1-21

Technically Approved for Rs 654810.00 (Rupees Six  
Lakh Fifty four thousand Eight hundred Ten) only.

254/21


S.E.  
R.W.D. (W) Circle  
Sitamarhi

**Detailed Estimate of Restoration work of Dhankaul Mohanpur PMGSY Path  
se Dakshinwari Tola after flood 2020.**

| sl<br>no.<br>1 | Supplying & filling of brick bats with manual compaction ....do....do all complete job as<br>per direction of E/l. |                        |             |                |            |                    |
|----------------|--------------------------------------------------------------------------------------------------------------------|------------------------|-------------|----------------|------------|--------------------|
|                | from<br>chainage<br>in M                                                                                           | to<br>chainage<br>in M | length in M | width in M     | depth in M | Quantity<br>in cum |
|                | 925                                                                                                                | 940                    | 15.00       | $(4.3+4.8)/2$  | 1.20       | 81.90              |
|                | 940                                                                                                                | 955                    | 15.00       | $(4.1+4.5)/2$  | 1.40       | 90.30              |
|                | 960                                                                                                                | 965                    | 5.00        | 4.30           | 1.00       | 21.50              |
|                | 1125                                                                                                               | 1149                   | 24.00       | $(3.00+4.8)/2$ | 2.40       | 224.64             |
|                |                                                                                                                    |                        |             |                |            | <b>418.34</b>      |
| (a)            | Brick Bats 80%                                                                                                     |                        |             |                |            | 334.67             |
| (b)            | Local Sand/ Rubbish 20%                                                                                            |                        |             |                |            | 83.67              |

  
J.E.

  
A.E.

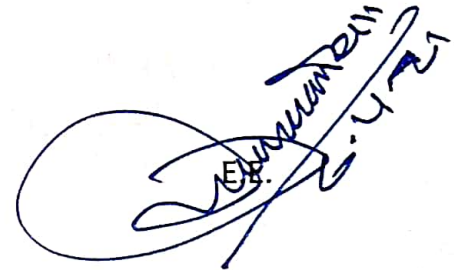  
E.E.