

Name of Road: RCC CULVERT PIPRA TO NEAR RIVER
District: WEST CHAMPARAN

Block: CHANPATIA
Cutting length

972.00 M

S. No.	SOR Item No.	Description	No	Length (M)	Width (M)	H/D (M)	Qty.	Unit	Rates (in Rs.)	Amount
4	RCD	Placing Tractor at loading point, loading with front end loader, dumping, turning for return trip, excluding time for haulage and return trip excluding C.P. including Carriage								
		As per measurement					0.000	cum	367.15	0.00
5	RCD	Laying brick bats on prepared soil surface as per Specification & direction of Engineer Incharge					1203.20			
		As per measurement					1203.20	cum	1703.77	2049980.41
6	RCD	Laying Jhama metal on prepared soil surface as per Specification & direction of Engineer Incharge					0.00			
		As per measurement					0.00	cum	2106.67	0.00
7	RCD(12.9)	Laying filled sand bag, stitching and placing etc.all complete as per specification and direction of Engineer Incharge					0.00	per bag	24.59	0.00
		Total Road work								2049980.41
		Add GST @12%								245997.65
		Add Labour Cess @1%								29519.72
		Add Seigniorage Fee@10% of basic material rate								122365.44
		Total Cost of work								2447863.22

[Signature]
21/11/20
AE

[Signature]
21/11/20
AE


[Signature]
E.E



Technically ~~Approved~~ Approved for Amount ₹ 2447863.22 (Twenty four lacs forty seven thousand eight hundred and sixty three rupees) only.

Detailed Measurement(Bricks Bat)				
No	L(m)	W(m)	D(m)	Qty(cum)
1	16	$(4+5)/2$	$(2.5+1.8+2.1)/3$	153.600
2	472	$(1.5+3)/2$	$(0.400+0.600+0.45)/3$	1026.600
1	12	$(4+6)/2$	$(0.300+0.450+0.400)/3$	23.000
TOTAL	972			1203.20

JE  21/12/2020

AE 

EE 

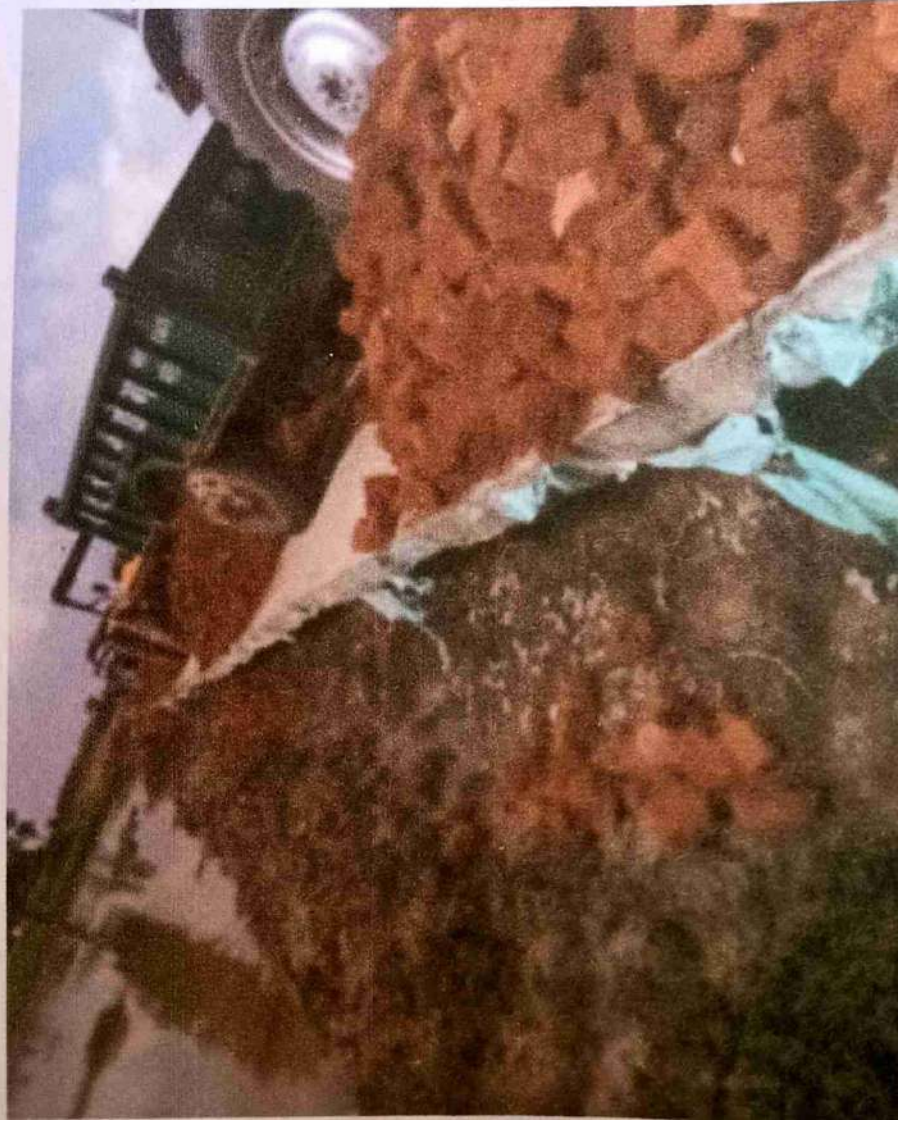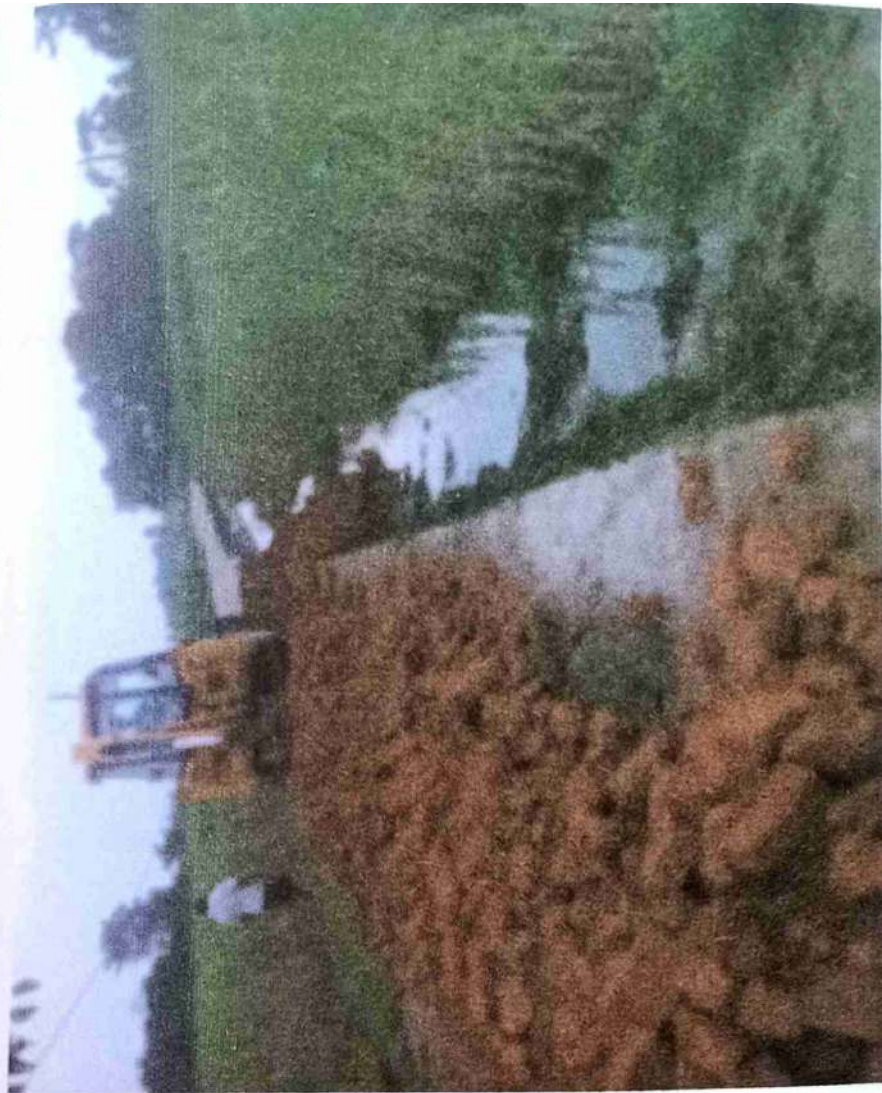

GOVERNMENT OF BIHAR

UNDER FLOOD DAMAGE REPAIR

Estimate for Restoration of Traffic

DISTRICT :	WEST CHAMPARAN	BLOCK :	CHANPATIA
YEAR(2020-2021)			
NAME OF ROAD :	RCC CULVERT PIPRA TO NEAR RIVER		
Total Length	:	0.972	KMS
Cost of Pavement (Rs.)	:	2447863.22	
Total Cost Of Road (Rs.)	:	2447863.22	
SUBMITTED BY			
Executive Engineer RWD			
Works Division, Narkatiaganj			

कार्यपालक अभियन्ता का कार्यालय

ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-2

पत्रांक-.....954...../ बगहा-2, दिनांक-.....24/12/2020

प्रेषक:-

कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, बगहा-2।

सेवा में,

अधीक्षण अभियन्ता,
ग्रामीण कार्य विभाग,
कार्य अंचल, बेतिया।

विषय:-

वर्ष 2020 के बाढ़ में क्षतिग्रस्त पथों को मोटरेबुल कराने हेतु किये गये कार्यों की जाँच के संबंध में।

प्रसंग:-

भवदीय पत्रांक-1312/बेतिया, दिनांक-26.08.2020।

महाशय,

उपर्युक्त विषयक एवम् प्रासंगिक पत्र के अनुपालन में कार्य प्रमंडल, नरकटियागंज द्वार उपलब्ध कराये गये मोटरेबुल पथों की सूची में अंकित पथों का अधोहस्ताक्षरी द्वारा सहायक अभियन्ता श्री दिगम्बर झा एवम् श्री नन्द किशोर साह के साथ निरीक्षण किया गया। निरीक्षण के दौरान कार्य प्रमंडल, नरकटियागंज द्वारा प्रतिवेदित सभी पथों पर कार्य कराया गया है एवम् यातायात चालु है।

सादर सूचनार्थ एवम् अग्रेत्तर कार्रवाई हेतु समर्पित।

अनु०:- निरीक्षण किये गये पथों की सूची।



(दिगम्बर झा)
सहायक अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-2

(नन्द किशोर साह)
सहायक अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-2

विश्वासभाजन,



(आनन्द बिहारी झा)
कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-2

(RURAL WORKS DEPARTMENT, GOVT. OF BIHAR)
COST ESTIMATE FOR traffic Restoration

Name of Road: RCC CULVERT PIPRA TO NEAR RIVER
District: WEST CHAMPARAN

Block: CHANPATIA
Cutting length

972.00 M

S. No.	SOR Item No.	Description	No	Length (M)	Width (M)	H/D (M)	Qty.	Unit	Rates (in Rs.)	Amount
1	2.13. C	Removal of Hume pipe Removing all types of Hume pipes and stacking within a lead of 1000 m including Earthwork and Dismantling of Masonry Works as per Technical Specification Clause 202.	0	2.50		1	0.00			
							0.00	M	381.23	0.00
2		Providing and laying reinforced cement concrete pipe NP3 for culverts on first class bedding of granular material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling, concrete and masonry	0	2.50		1	0.00		4744.43	0.00
3	3.3	(B) EARTHWORK Construction of Embankment with Material Obtained from Roadway cutting Construction of embankment with approved materials deposited at site from roadway cutting and excavation from drain and foundation of other structures graded and compacted to meet requirement of Tables 300.1 and 300.2 as per Technical Specification Clause 301.5 excluding C.P.								
		As per measurement					0.000	Cum.	25.32	0.00