

कार्यपालक अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमंडल,
मुजफ्फरपुर पश्चिम

पत्रांक :- 543 अमु०/मुज०

दिनांक :- 23/03/24

प्रेषक:- कार्यपालक अभियंता,
ग्रामीण कार्य विभाग, कार्य प्रमंडल,
मुजफ्फरपुर पश्चिम।

सेवा में,
अपर मुख्य कार्यपालक पदाधिकारी
—सह—सचिव,
ग्रामीण कार्य विभाग, बिहार, पटना।

विषय:- शीर्ष नई अनुरक्षण नीति-2018 (MR) अन्तर्गत वित्तीय वर्ष 2020-21 में व्यय हेतु आवंटन की मांग।

महाशय,

उपर्युक्त विषयक शीर्ष नई अनुरक्षण नीति-2018 (MR) अन्तर्गत वित्तीय वर्ष 2020-21 में व्यय हेतु आवंटन संलग्न विवरणी के अनुसार रु० 33.02193 (तैतीस लाख दो हजार एक सौ तिरान्वे) रुपये मात्र का आवंटन उपलब्ध कराने की कृपा की जाये, ताकि किये गये कार्य का भुगतान किया जा सके।

अनुलग्नक— 1. विहित प्रपत्र में अधियाचना।

विश्वासभाजन

18/23/31

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग, कार्य प्रमंडल,
मुजफ्फरपुर पश्चिम

Requisition Format for Scheme Head - MR (3054) Under Bihar Rural Road Maintenance Policy-2018 (Initial Rectification and Surface Renewal)

Name of Works Division :- Muzaffarpur West

S.N.	Package No.	Name of Road	Project ID as per MIS	Administrative Approval (AA) Letter No. & Date	Administrative Approval (AA) Length (in Km)	Administrative Approval (AA) Amount (in Lakh)	Agreement Amount (in Lakh)	Initial Rectification with Surface Renewal (in Lakh)	5 Year Routine Maintenance Maint. (in Lakh)	Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of TRI (in mm/km)	Thickness of Bitumen Layer (in mm)	Value of Bitumen Content in Percentage	Previous Total Allocated Amount (in Lakh)	Up-to-date expenditure as per MIS (in Lakh)	Requisition against work done (in Lakh)	Remarks
1	MR-N/19-20	Pitch Road - Sain Brijal	31507202230	13.12.2019	2.080	53.17580	33.90700	16.88260		239MBD/2020-21	28.02.2021	SDBC Complete	1794.000	25mm	5.00	0.00000	0.00000	33.02193	MB Copy Attached

23/1

Executive Engineer
RWD Works Division
Muzaffarpur West

23/1

Tied and find Bill.

NEW - M

12

Sch. XLV—Form No. 134

Particulars	Details of actual measurement				Contents of area
	No.	L.	B.	D.	
Name of work: Constn of Road from M.R.N./19-22					
Mur. West/31. in Contn. block under					
New Measurement (MR).					
Pitch Road to Sain Baghel.					
Name of Agency: - M/s. Vicky Constn.					
No. of Agreement: 239-MBD/2020-21.					
Date of work order: - 29/05/2020					
Date of Completion: - 28/02/2021.					
Actual date of Completion: - 24/02/2021.					
Measurement void M.B. No. 363 Page (4) & (5)					
Abstract of cost					

(1/160) Clearing and grubbing and					
Land - do - do - comp.					
Qty used M.B. Page (9) item (1/160)					
0.416 Hec @ 51137.76/Hec = 21272.70					
(2/162) Constn of subgrade and					
earth shoulder - do - do - comp.					
Qty used M.B. Page (9) item (2/162)					
748.80 m ³ @ 175.22/m ³ = 131205.70					
(3/162) Providing & spreading and					
compacting stone - do - do - comp.					
Qty used M.B. Page (9) item (3/162)					
32.19 m ³ @ 3110.27/m ³ = 100120.70					
(4) Providing and applying primer					
Cost - do - do - comp.					

Continuation

Scanned by CamScanner

Name of Road - Pitch Road to sine Brijal									
Date	Time	Section No.	Length in km	Bumps in mm	Speed Rate	OR	IRI CATEGORY	Latitude .ongitude	Event
20/2/21	15:45:12	18	0.1	140	0	1400	1371 G	2 26.21168 85.24256	Normal
20/2/21	15:45:12	18	0.1	120	30.3	1200	1173 G	1.74 26.21137 85.24345	Normal
20/2/21	15:45:47	18	0.1	140	20.2	1400	1371 G	2 26.21184 85.24421	Normal
20/2/21	15:46:00	18	0.1	300	30.3	3000	2953 G	3.97 26.21224 85.2451	Normal
20/2/21	15:46:00	18	0.1	140	30.3	1400	1371 G	2 26.21251 85.24604	Normal
20/2/21	15:46:23	18	0.1	210	20.2	2100	2063 G	2.88 26.21279 85.24704	Normal
20/2/21	15:46:23	18	0.1	180	30.3	1800	1766 G	2.51 26.21314 85.24795	Normal
20/2/21	15:46:23	18	0.1	190	30.3	1900	1865 G	2.63 26.21367 85.24877	Normal
20/2/21	15:46:23	18	0.1	240	20.2	2400	2360 G	3.25 26.21435 85.24923	Normal
20/2/21	15:47:00	18	0.1	130	10.1	1300	1272 G	1.87 26.21517 85.2488	Normal
20/2/21	15:47:00	18	0.1	130	0	1300	1272 G	1.87 26.216 85.2484	Speed Breaker
20/2/21	15:48:08	18	0.1	150	20.2	1500	1469 G	2.13 26.21661 85.24773	Normal
20/2/21	15:48:08	18	0.1	110	10.1	1100	1074 G	1.61 26.2173 85.24734	Normal
20/2/21	15:48:44	18	0.1	220	10.1	2200	2162 G	3 26.21778 85.24668	Normal
20/2/21	15:49:00	18	0.1	200	10.1	2000	1964 G	2.76 26.21757 85.24576	Normal
20/2/21	15:49:19	18	0.1	90	20.2	900	876 G	1.34 26.21674 85.24534	Normal
20/2/21	15:50:00	18	0.1	290	20.2	2900	2854 G	3.85 26.21655 85.24466	Normal
20/2/21	15:50:00	18	0.1	230	10.1	2300	2261 G	3.13 26.21689 85.24365	Curve
20/2/21	15:50:30	18	0.1	210	10.1	2100	2063 G	2.88 26.2176 85.24327	Normal
20/2/21	15:51:00	18	0.1	190	20.2	1900	1865 G	2.63 26.21735 85.24251	Normal
20/2/21	15:51:05	18	0.074	170	10.1	2297	2258 G	3.12 26.217 85.24187	Normal
AVG:-						1794			

$$Y = 0 * X^2 + 0.989 * X - 13.58$$


$$X = 2297$$

$$Y = 2258$$

(R) RURAL ROAD

Good Average Poor
<4000 4001-5000 >5001

File :H:\Software\Bump Indicator Software\08.12.2020\Wicky_Const1\17.03.2021\17031551.Xls. Section No.:18, Egn
Name of Customer :M/S VIKKY CONSTRUCTION, Name of Work/ Road :Pitch Road to sine Briljal. Lab Job number

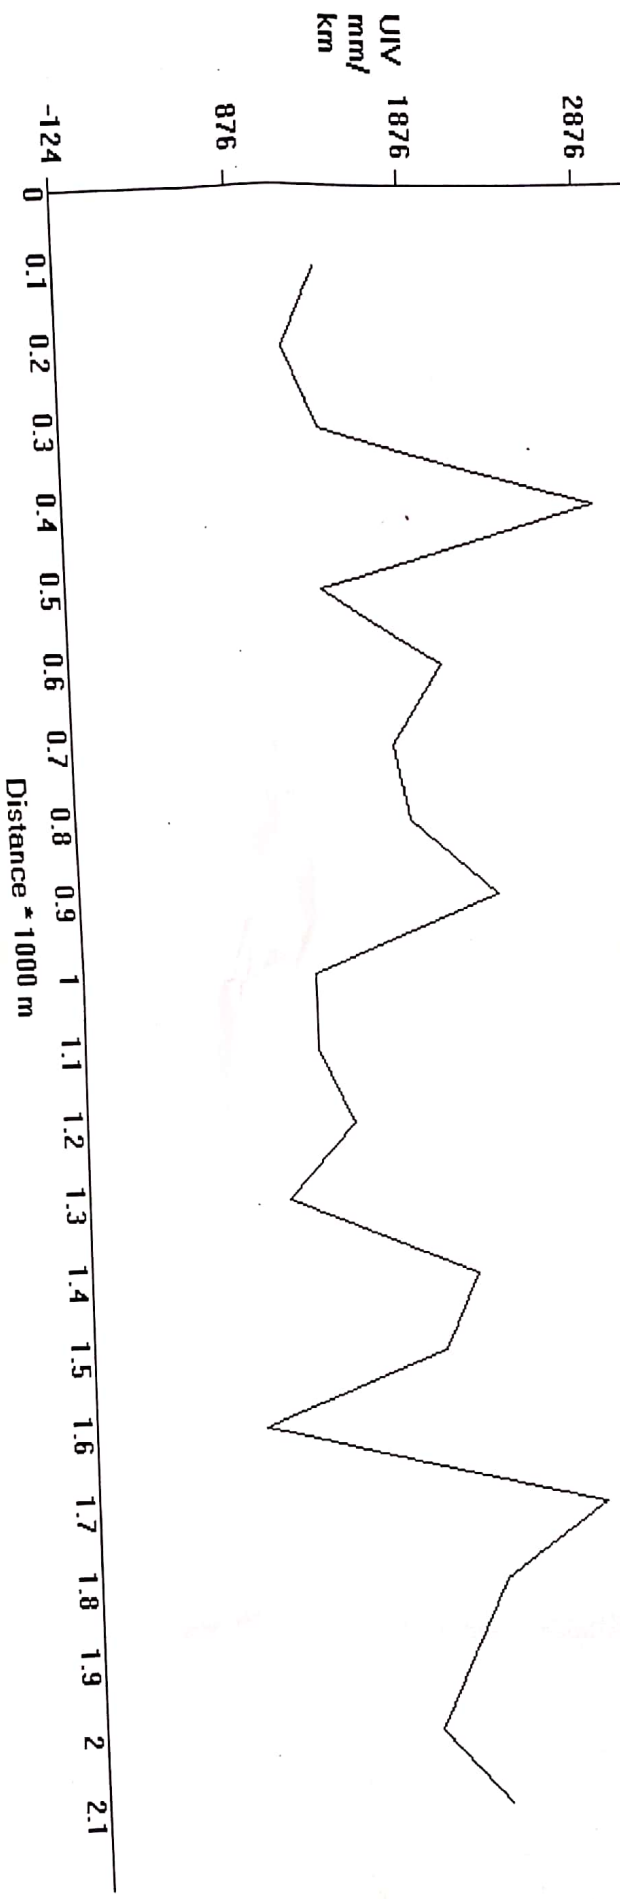

✓