

GOVERNMENT OF BIHAR

UNDER FLOOD DAMAGE REPAIR

Estimate for Restoration of Traffic

DISTRICT :	WEST CHAMPARAN	BLOCK :	NARKATIAGANJ	
YEAR(2020-2021)				
NAME OF ROAD :	NARKATIAGANJ MANJHARIYA MANWA PARSI TO EKDARWA			
Total Length	:	0.260	KMS	
Cost of Pavement (Rs.)	:	1465221.79		
Total Cost Of Road (Rs.)	:	1465221.79		
SUBMITTED BY				
Executive Engineer RWD				
Works Division, Narkatiaganj				

TECHNICAL REPORT

Name of Road :- Narkatiaganj Manjhatia Manjhatia Pausi to Ekdamua

Name of Block :- Narkatiaganj

Name of Division :- Narkatiaganj

Name of District :- West Champaran

Estimated Cost :- 14.65222 lakh

Restoration Length :- 0.260 km

This Estimate is prepared for Restoration of Narkatiaganj Manjhatia Manjhatia Pausi to Ekdamua

.....road under FDR as per the instruction of Secretary, Rural Works Department, Patna vide,

ज्ञापक:- मु0अ0 -4 (मु0) विविध (कार्य) 23 -40 /16-2254 पटना, दिनांक 30.06.2020. Road remains effected from flooded about 01 to 02 weeks and heavy amount of water passed through it.

Honorable Chief Minister/Secretary, Rural Works Department, Bihar, Patna/D.M., West Champaran, Bettiah/Concerned MP/MLA has instructed to maintain the traffic and movement of public etc. at the earliest so that public of this area may get connected and for the same Departmental instruction has also been issued to fill the gap made by flooded immediately.

The area surrounding is submerged in water and hence provision of Briekhat, Shamabruk has been made to maintain the road damage due to flood/heavy rainfall as per availability of material from available place by tractor. Presently there is no Contractor is employed for Construction and Maintenance of this road hence the work has been carried out Departmentally and due to this, provision of Contractor profit is not mentioned in the estimate.

In view of above, it is requested to approve the estimate amounting to Rs. 14.65222 lakh please.
Submitted for Technical Approval please.

Bhuma
23/12/2020
Junior Engineer,
Narkatiaganj

23/12/2020
Assistant Engineer,
Narkatiaganj

23/12/20
Executive Engineer
R.W.D.(W) Division, Narkatiaganj

कार्यपालक अभियन्ता का कार्यालय

ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-2

पत्रांक-.....954...../ बगहा-2, दिनांक-.....24/12/2020/

प्रेषक:-

कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, बगहा-2।

सेवा में,

अधीक्षण अभियन्ता,
ग्रामीण कार्य विभाग,
कार्य अंचल, बेतिया।

विषय:- वर्ष 2020 के बाढ़ में क्षतिग्रस्त पथों को मोटरेबुल कराने हेतु किये गये कार्यों की जाँच के संबंध में।

प्रसंग:- भवदीय पत्रांक-1312/बेतिया, दिनांक-26.08.2020।
महाशय,

उपर्युक्त विषयक एवम् प्रासंगिक पत्र के अनुपालन में कार्य प्रमंडल, नरकटियागंज द्वारा उपलब्ध कराये गये मोटरेबुल पथों की सूची में अंकित पथों का अधोहस्ताक्षरी द्वारा सहायक अभियन्ता श्री दिगम्बर झा एवम् श्री नन्द किशोर साह के साथ निरीक्षण किया गया। निरीक्षण के दौरान कार्य प्रमंडल, नरकटियागंज द्वारा प्रतिवेदित सभी पथों पर कार्य कराया गया है एवम् यातायात चालु है।

सादर सूचनार्थ एवम् अग्रेत्तर कार्रवाई हेतु समर्पित।


अनु०:- निरीक्षण किये गये पथों की सूची।



(दिगम्बर झा)
सहायक अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-2

(नन्द किशोर साह)
सहायक अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-2


विश्वासभाजन,



(आनन्द बिहारी झा)
कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-2

ज्ञापक-.....954...../बगहा-2, दिनांक-.....24/12/20/

प्रतिलिपि:- कार्यपालक अभियन्ता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, नरकटियागंज को सूचनार्थ सम्प्रेषित।



कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-2

34	Sikta	Sikta to Bheriharwa	0.133	19,72,961.00
35	Sikta	Sikta to Surajpur	0.028	4,39,443.00
36	Sikta	Sikta to Chhapaniya	0.098	9,97,953.00
37	Sikta	Sikta to Ekdeyari	0.09	5,29,712.00
38	Sikta	Sikta to Khap tola	0.083	7,67,337.00
39	Sikta	Sikta to Sundergawan	0.109	6,60,731.00
40	Sikta	T03 to Dharampur	0.284	16,76,700.00
41	Sikta	Baishakhwa to Sargatiya	0.029	3,90,616.00
42	Sikta	Bishkhawa to Sikta	0.048	9,58,963.00
43	Sikta	Dhamaura to Narkatia	0.052	6,71,372.00
44	Gaunaha	Gaunaha Rly Station to Sithi	0.12	11,06,352.00
45	Gaunaha	Marjadi to Marjadpur	0.11	16,66,842.00
46	Gaunaha	Mehnaul kal to Hardi	0.13	14,33,177.00
47	Gaunaha	PWD Road to Dhamaura	0.045	2,89,055.00
48	Gaunaha	RWD Road to Harpur	0.095	9,21,546.00
49	Gaunaha	REO Road to Mahuawa Bhusha	0.07	13,11,852.00
50	Narkatiaganj	REO Road to Panchamwa	0.475	16,29,029.00
51	Narkatiaganj	Pokhariya to Somgadhi	0.675	15,20,124.00
52	Narkatiaganj	Maniyari Bridge to Bridge	0.16	7,47,248.00
53	Narkatiaganj	Sisai to Rakhai	0.11	3,24,989.00
54	Narkatiaganj	T01 to Chintawanpur	0.35	13,45,653.00
55	Narkatiaganj	Satwariya to Manjhariya	0.378	15,92,386.00
56	Narkatiaganj	NKE PWD Road se Khap tola to Mahadalit Basti hote hue Dhaminaha Basti	0.212	6,36,513.00
57	Narkatiaganj	T01 to Senuriya Naya tola	0.06	6,21,851.00
58	Narkatiaganj	Siswa to Roari	0.08	7,55,945.00
59	Narkatiaganj	Dhobaha to Inarwa	0.44	16,27,769.00
60	Narkatiaganj	Barai tola to Bhashurari Petrol Pump via Sikarpur bairia	0.362	14,62,769.00
61	Narkatiaganj	PWD Road to Bazar tola	0.24	4,60,545.00
62	Narkatiaganj	Sathi to Dharampur	0.63	15,25,968.00
63	Narkatiaganj	Midraul PMGSY to Balua Path	0.85	6,36,832.00
64	Narkatiaganj	Binwaliya to Barwa	0.235	6,20,616.00
65	Narkatiaganj	Matiyariya PMGSY to Sherahwa	0.232	2,39,942.00
66	Narkatiaganj	Mathura to Belwaniya	0.302	7,34,549.00
67	Narkatiaganj	Marhiya to Banwaria	0.255	4,27,695.00
68	Narkatiaganj	L022 to Barwa Baruli	0.1	14,27,512.00
69	Narkatiaganj	Narkatiaganj Manjahriya to Manwa parsi Ekderwa	0.26	14,65,222.00
70	Narkatiaganj	Gopalpur to Fhulwariya	0.475	7,91,830.00

Name of Road: Narkatiaganj Majharia Manwa Parsi to Ekdarwa
District: WEST CHAMPARAN

Block: NARKATIAGANJ Length: 260.000 m
Cutting length 260 M

S. No.	SOR Item No.	Description	No	Length (M)	Width (M)	H/D (M)	Qty.	Unit	Rates (in Rs.)	Amount
1	RCD	Laying brick bats on prepared soil surface as per Specification & direction of Engineer Incharge								
							470.06	cum	1703.77	800880.09
2	RCD	Laying Jhama metal on prepared soil surface as per Specification & direction of Engineer Incharge								
							184.94	cum	2106.67	389601.90
		Total Road work								1190481.99
		Say Rs. (Lac)								1190481.99
		Add GST @12%								142857.84
		Add Labour Cess @1%								11904.82
		Add Seignrage Fee@10% of basic material rate								119977.14
		Total Cost of work								1465221.79

23/11/2020
A.E.

23/11/2020
E.E.

Technical approval for Rs (14,65,221=10) (Rupees Fourteen Lac Sixty five thousand two hundred twenty one) only.

Cost Estimate of Road

1 of 1

23/11/2020
Superintendent Engineer
Rural Works Department
Works Circle, Bettiah
Govt. of Bihar
MANWA PARSI EKDARWA

Detailed Measurement(BRICK BAT)				
No	L(m)	W(m)	D(m)	Qty(cum)
2	40	$(4.0+5.0)/2$	$(0.3+0.45+0.6)/3$	162.000
2	30	$(2.75+3.75)/2$	$(0.2+0.3+0.4)/3$	58.500
10	5	$(0.75+1.0)/2$	$(0.5+0.75+1.0)/3$	32.813
4	10	$(2.0+2.5)/2$	$(0.4+0.5+0.6)/3$	45.000
2	15	$(1.5+2.0)/2$	$(0.3+0.6)/2$	23.625
TOTAL	260			321.94

Detailed Measurement(JHAMA BRICK)				
No	L(m)	W(m)	D(m)	Qty(cum)
1	40	$(3.0+4.0)/2$	$(0.3+0.4+0.5)/3$	56.000
1	30	$(2.75+3.75)/2$	$(0.6+0.75)/2$	65.813
1	50	$(2.0+2.5+3.0)/3$	$(0.3+0.4+0.5)/3$	50.000
4	5	$(0.75+1.0)/2$	$(0.5+0.75+1.0)/3$	13.125
TOTAL				184.94



RE DAMAGED(MEASUREMENT)

Detailed Measurement(BRICK BAT)				
No	L(m)	W(m)	D(m)	Qty(cum)
1	30	$(3.0+4.0)/2$	$(0.5+0.75+1.0)/3$	78.750
1	25	$(2.0+2.5)/2$	$(0.3+0.6+0.9)/3$	33.750
4	5	$(0.75+1.0)/2$	$(0.5+0.75+1.0)/3$	13.125
2	10	$(2.0+2.5)/2$	$(0.4+0.5+0.6)/3$	22.500
TOTAL				148.13

Pruman
23/12/20
JR

PR
23/12/2020
A.E.

P
23/12/20
E.E.

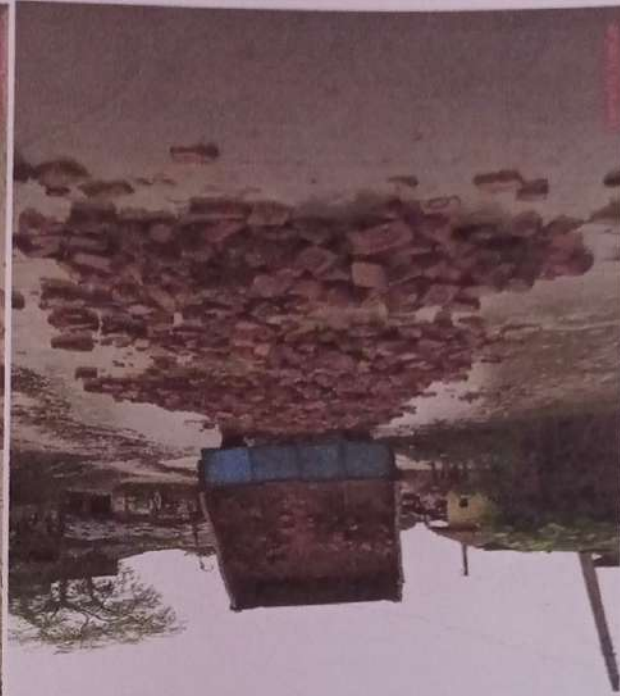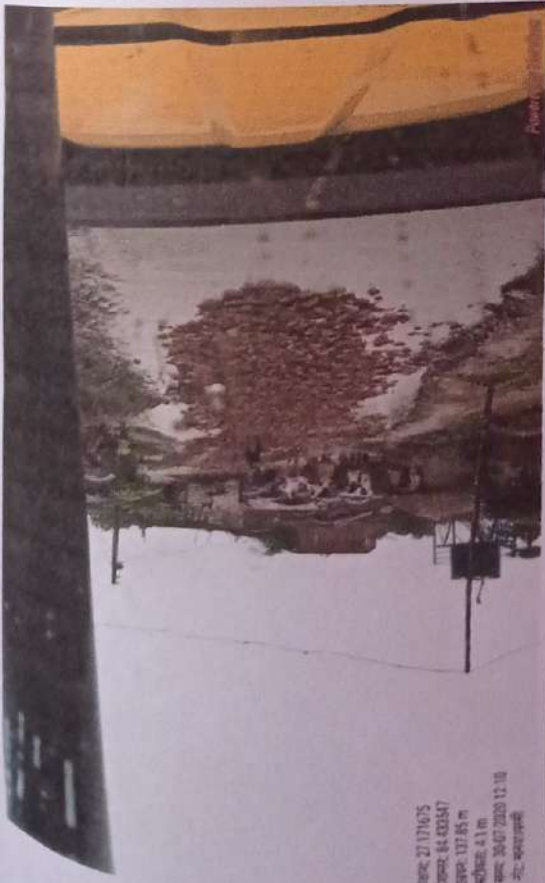

23/12/22
 ૧૫

23/12/22
 ૧૫