

Rate for motorability of road damaged by flood from T03 TO SARISAV DARJI TOL for Year 2019

MR 3054

Length : 1.224 KM

Name of Item	unit	No	Length	Width	Height	Qty.	Rate	Amount
Providing and filling brick bats in ditches including cost of brick bats and labour all complete job as per specification and direction of E.A.	cum	As Per Appendix 1				211.02 188.41 115	1840.16	388340.58 3,46,760.00
								388340.58 3,46,760.00
Add 12% GST								46597.27 416,11.00
Add 1% Labour Cess								3883.41 395,00.00
TOTAL (in Re.)								438790.94

Say (in Re.) 438791.00

Add S.Fee 20031.00
4,11,870.00

[Signature]
Junior Engineer,
Rural Works Department,
Works Section, Pandaul

[Signature]
Assistant Engineer,
Rural Works Department,
Works Sub Division, Pandaul

[Signature]
Executive Engineer,
Rural Works Department,
Works Division, Madhubani

रहस्य समीक्षा. २०० १००.००, दर २०० १००.०० (१००) २०
दर ०६ १०० (१००) १०० - १६.०१.२०२१ ३ २०० १००.०० १००.००
३ ३०० १०० -

Post - Refd: T/A १०० १००.०० १००.००
(Rupees Four lakh eleven thousand eight hundred -
seventy only.)

[Signature]
22.01.21

Superintending Engineer
BWD, Works Circle, Darbhanga
[Signature]

Name of Road:-- T03 TO SARISAV DARJI TOL

Scheme :- MMGSY

Length : 1.224

Block : Pandaul


Appendix - I

Measurement for restoration of Embankment & Shoulder with Brick Bat


SL No.	Chainage (in m)	No.	Length (in m)	width (in m)	Thickness (in m)	Quantity (cum)
1	500.00 TO 600.00	1.00	6.00	2.00	1.00 (av.)	12.00
2		1.00	5.00	2.00	1.50 (av.)	15.00
3		1.00	3.00	1.50	0.90 (av.)	4.05
4	600.00 TO 650.00	1.00	2.50	1.50	1.20 (av.)	4.50
5		1.00	4.50	3.75	0.50 (av.)	8.44
6		1.00	7.00	3.50	0.30 (av.)	7.35
7		1.00	5.00	3.50	0.30 (av.)	5.25
8	900.000	1.00	32.00	$(3.75+5.5)/2$	0.60 (av.)	88.80
9	1175.000	1.00	25.00	3.50	$\frac{0.25+0.75+0.50}{3}$ 0.75 (av.)	65.63 43.05 M ³
TOTAL						211.02 188.44 M ³



Junior Engineer
Rural Works Department,
Works Section, Pandaul



Assistant Engineer,
Rural Works Department,
Works Sub Division, Pandaul

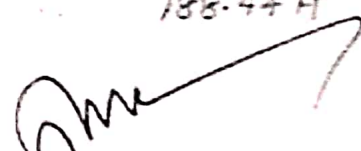

Executive Engineer
Rural Works Department,
Works Division, Madhubai

पतांक ०६ नैम्य (दरभंगा) दिनांक 16/01/21
सेवा में

अधीक्षण अभियंता,
ग्रा० का० वि०, कार्य
अंचल दरभंगा

विषय:- वर्ष 2020 में बाढ़ / अतिवृष्टि से क्षतिग्रस्त पथों/पुलों
में कराये गये पुर्नस्थापन कार्य से संबंधित
पथों का प्राक्वचन के संबंध में।

प्रसंग- भवदीय का पतांक 2863 अनु० दि० 02/12/2020

महाराज,

उपरिक्त विषयक प्रासंगिक पत्र से प्राप्त
आतायात पुर्नस्थापन कार्य का निम्नोक्त
प्राक्वचन गठित जॉचदल श्री दिनेश कुमार
गुप्ता, स० 30, ग्रा० का० वि०, कार्य अवर प्रमंडल, कुशेश्वर-
स्थान एवं श्री हरेश्वर, क० 30, कार्य प्रशाखा, जाले
द्वारा जॉचोपरान्त प्रति हस्ताक्षर कर आवश्यक
अग्रतर कार्रवाई हेतु मूल में समर्पित किया जा
रहा है।

- ① Pakki road Jamsam to Mahadalit tol - 0.592 Km
- ② Bhawanipur to Shankarpur - 3.10 Km
- ③ To 4 to Navtoli (Bhawanipur) - 4.613 Km
- ④ Hati to Rampatti - 5.40 Km
- ⑤ To 3 to Sarisav Sarji Tol - 1.224 Km
- ⑥ Sarisopahi Sarji tol to NH 57 - 1.550 Km
- ⑦ To 4 Sarisav to Shishua - 7.667 Km
- ⑧ Ramlabari to Udaipur Bithuar - 3.56 Km
- ⑨ Bardiwan to Kakna Railway line - 1.05 Km
- ⑩ Mohampur middle school to Seema tol - 1.916 Km

अनु० - यथोक्त

विश्वासगजन

दिनांक 16/01/21
सहायक अभियंता
ग्रा० का० वि०, कार्य
अवर प्रमंडल, दरभंगा