

ABSTRACT

Road name - Temporary Restoration of Road from REO road to Navtoliya

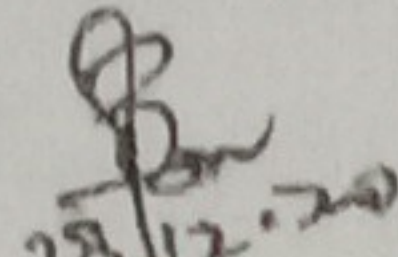
Block-DARBHANGA

RWD (W) DIVISION DARBHANGA -1

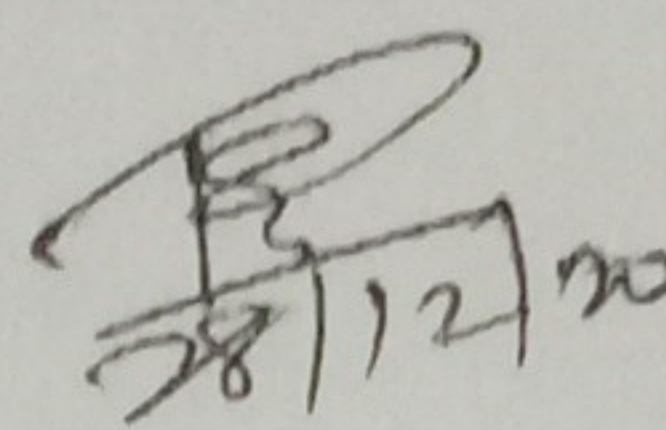
Road Actual Length - 0.380 KM

Elected Road Length 132.80 M.

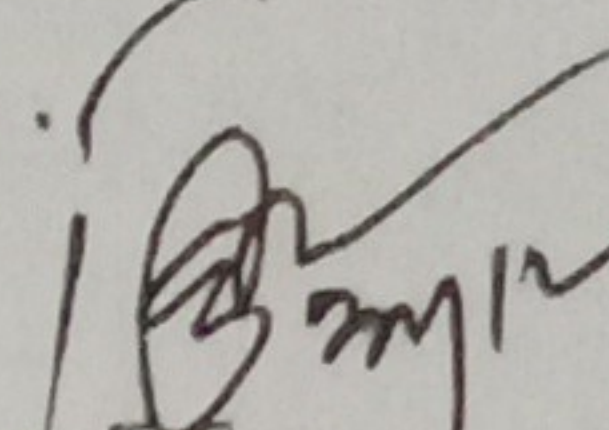
S.No.	ITEM	UNIT	QUANTITY	RATE	AMOUNT (Rs)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I.	CUM	768-54 840-808	1867.76	1435,448 ²⁰ 1570428
	Add G.S.T. 12 %				188451 172254 ²⁰
	Add 1 % Labor cess				15704 14354 ²⁰
	Seigniorage Fee @1063.00/cum x0.10				89378 81696 ²⁰
	Total				1863961 1703752 ²⁰


J.E.

Work Section Darbhanga-2


A.E.

Work Sub-Division
Darbhanga


E.E.

RWD Darbhanga -1

कर्मचारी/मह. अभियंता, रा.म. रा. वि. कार्यालय-कुमराय का पत्र:- 562 3130 /
दिनांक:- 07/10/2021 के द्वारा स्थापित- आर्थ. प्रतिवेदन के आधार पर —

Post-facto T/A for Rs. 17,03,752²⁰ (Rupees Seventeen lacs.
— three thousand seven hundred fifty two) only.
09-4-29

Superintending Engineer
RWD, Works Circle, Darbhanga
09/04/2021

Detailed Estimate for Temporary Restoration of REO road to Navtoliya road for the year 2020-21.

Block - Darbhanga

Total Restoration Length - 132.80 M

R.W.D (W) Division - Darbhanga -1

Length - 0.380 km

S.N.	item	No.	Length (M)	Width(M)	Depth (M)(AV)	Quantity (cum)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I.					
	Chainage in M					
	0	1	64.00	2.80	0.300	53.760
	LHS	1	13.00	(0.30+1.50)/2	1.500	17.550
	75	1	14.70	(3.25+6.00)/2	2.250	152.972
	103	1	4.50	(0.30+1.25)/2	1.250	4.359
	160	1	21.10	(3.70+10.00)/2	(2.60+5.50)/2	585.367
		1	7.00	(0.30+1.50)/2	1.500	2.025
	241	1	1.50	3.00	0.450	2.025
	301	1	7.00	(2.20+3.00)/2	1.250	22.750
	Total Qty.					840.808

[Signature]
08/12/20
A.E.

[Signature]
E.E.

RWD(W) Division Darbhanga -1

verified

[Signature]
6.3.21.
J.E.

[Signature]
6/3/2021
V.E.

395
6/3/21
R.R.