


GOVERNMENT OF BIHAR
RURAL WORKS DEPARTMENT

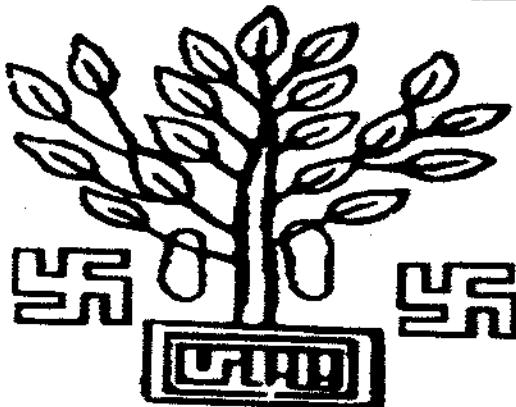

Name of work : PALASH PRAKHAND KE PWD ROAD PALASI SE
LAP CFDR-2020-21 Length - 24.10 km

District : Araria

Block : Palasi

FDR (2020-21)

Restoration Cost of Road	: Rs. 7.508 Lacs
12% GST of Rest. Cost	: Rs. 0.901 Lacs
1% L.CESS of Rest. Cost	Rs. 0.075 Lacs
Total Restoration Cost including Labour Cess & GST	: Rs. 8.484 Lacs

R.W.D, WORKS CIRCLE, KISHANGANJ

R.W.D, WORKS DIVISION, ARARIA

प्रतिवेदन

पथ का नाम:- Palakhi Prakhara ke Puro Road Palakhi se LRP

प्राक्कलित राशी:- मो.- 13 8.484 Lac

संलग्न प्राक्कलन दिनांक:- 10.06.2020 को प्रखंड में आई भीषण बाढ़ से क्षतिग्रस्त

Palakhi Prakhara ke Puro Road Palakhi se LRP पथ में बाढ़ क्षतिग्रस्त मरम्मत मद से यातायात चालू करने हेतु तैयार किया गया है, जिसकी प्राक्कलित लागत 13,84,84,000 है।


इस पथ का निर्माण योजना अंतर्गत हुआ है एवं योजना अनुरक्षण अवधि में।

..... पथ के कटे (क्षतिग्रस्त) भाग में आवश्यकता अनुसार Hume Pipe, लोकल बालू, बातर, गनी बैग एवं Brick Bats का प्रयोग कर यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गए कार्य का विवरणी स्पष्ट रूप से प्राक्कलन में दर्शाया गया है।

प्रस्तुत प्राक्कलन वर्तमान अनुसूचित दर पर तैयार किया गया है जिसकी प्रशासनिक एवं तकनीकी स्वीकृति आपेक्षित है।



जनार्थ अभियंता
ग्रामीण कार्य विभाग
कार्य प्रशाखा, 10/11



सहायक अभियंता
ग्रामीण कार्य विभाग
कार्य अवर प्रमंडल, पलसी



कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, अररिया।

Inspection Report for Flood Damage Work

Date: - 20/11/2020


1. Name of PIUs:- EE RWD WORKS Division Amrit
2. Name of Block:- Palahi
3. Name of Road:- Palahi Prakhanda ke PWD Road Palahi Se LRP

A) For Road


1. Damage Location/Chainage :- 1100m
2. Damage Length :- 95m
3. Nature of Damage :- damaged in flood flank & road crust
4. Details of Restoration Works :-
 - (i) Material Being used in Restoration:- Sand, Gr. Bap & Brick Bats
 - (ii) Equipment's/Tools being used in Restoration Works:- Tractor
 - (iii) Procedure taken up in Restoration Works:- Fill up of flank with L-sand & Brick Bats
 - (iv) Restored Length :- 40m

B) For Bridge

1. Damage Location/Chainage:-
2. Damage Length :-
3. Nature of Damage :-
4. Details of Restoration Works:-
 - (i) Material Being used in Restoration:-
 - (ii) Equipment's/Tools being used in Restoration :-
 - (iii) Procedure taken up in Restoration works :-
 - (iv) Restored Length :-


Signature of JE/AE/EE

Signature


(Name of Inspector)

FDR (2020-21)
GENERAL ABSTRACT OF COST

Name of Road : **PALASI PRAYMAND KE PWD ROAD PALASI SE LRP**
 District : Araria
 Block : Palasi
 Cutting Chainage (M) : 1100 (Side Cutting)
 (PDR 2020-21)

Sl. No.	Item of work	Amount (In Rs.)
1	Filling of Local Sand	69,115.00
2	Labour for cutting 62mm to 75mm dia Bamboo	-
3	Labour for fitting & fixing 62mm to 75mm dia Bamboo runner	-
4	Supply of EC bag of Local Sand	89,347.00
5	Supply & Carriage of Brick Bats	5,68,430.00
6	Supply, laying and carriage of 1000mm dia HPC	23,909.00
a	Sub Total Cost of Work :	7,50,801.00
b	12% GST of Total Cost (a) :	90,096.00
	1% L.Cess of Total Cost (a) :	7,508.00
d.	Total Cost of Work including GST (a +b) :	8,48,405.00
e.	Add Contingency @ 1% Cost Of Work (d) :	-
g.	Total Cost Including Labour cess, GST & Contingency cost (d+e+f) :	8,48,405.00

So 8,48,405/-

[Signature]
 J.E. RWD, Work Sec.
 Palasi

[Signature]
 A.E., RWD Works Sub.Div Palasi

[Signature]
 E.E., RWD Araria

Technically approved for 8,48,405/- (Rupees Eight Lacs forty eight thousand four hundred only).

[Signature]
 S. E., RWD Circle Kishanganj
 12/3/24

BILL OF QUANTITY

Name of Road: **PALASI PRAKHAND HE PWD ROAD**
PALASI SE LRP (FDR 2x20-21)
 Block: Palasi
 District: Araria
 Division: R.W.D, Araria

Sl No.	Description	Unit	Quantity	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.	Cum	110.25	626.89	69115.00
2	Labour for cutting 62mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-Charge.	Mtr.	0.00	50.20	0.00
3	Labour for fitting & fixing 62mm to 75mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-Charge.	Mtr.	0.00	28.53	0.00
4	Supplying of EC bag, filling of local sand, stitching and placing in position as per the direction of Engineer-in-charge.	Each	2342.00	38.15	89347.00
5	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.	Cum	265.00	2145.02	568430.00
6	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.	meter	5.00	4781.89	23909.00
TOTAL AMOUNT =					750801.00

[Signature]
 20/12/2020
 JE

RWD WORKS
 Sec. Palasi

[Signature]
 20/12/20
 AE

RWD WORKS sub DIV. Palasi

[Signature]
 20/12/20
 EE

RWD WORKS
 DIV. Araria

SE

RWD works Circle
 KISHANGANJ

ESTIMATE FOR REPAIRING/ RESTORATION / MAKING MOTORABLE ROADS DAMAGED DURING FLOOD									
Detailed Estimate									
Name of Road:									
Block:									
District:									
SI No.									
Items of Works									
Palasi									
Araria									
	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m3)				
1									
	2	35.00	(2.5+1.8+2.0)/3	(1.8+1.2)/2	110.25				
				TOTAL=	110.25				
2				Total Qty =	110.25				
	0								
				0.00	0.00				
				Total Qty =	0.00				
	0	0.00	0.00		0.00				
				Total Qty =	0.00				
3									
	0								
</									

PALASI PRABHATI KOL PWD ROAD PALASI SR LRP (FDR 2020-21)

