

## ABSTRACT

**Road name - Temporary Restoration of Road from To7,SH, Madhopur to Ketuka**

Block-DARBHANGA

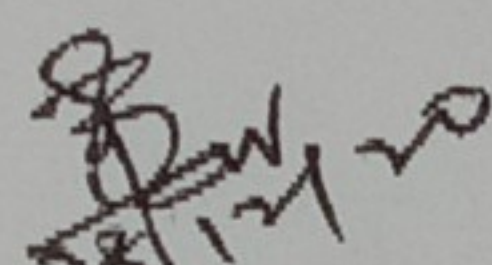
RWD (W) DIVISION DARBHANGA -1

Road Actual Length - 5.26 KM

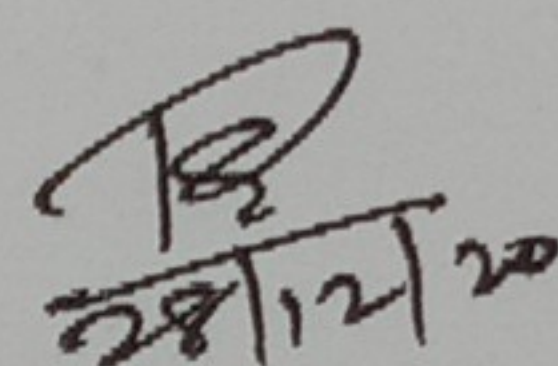
Efected Road Length 29.50 M.

| S.No. | ITEM                                                                                                                                               | UNIT | QUANTITY | RATE    | AMOUNT (Rs) |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------|------|----------|---------|-------------|
| 1     | Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I . | CUM  | 96.023   | 1867.76 | 179348      |
|       | Add G.S.T. 12 %                                                                                                                                    |      |          |         | 21522       |
|       | Add 1 % Labor cess                                                                                                                                 |      |          |         | 1793        |
|       | Seigniorage Fee @1063.00/cum x0.10                                                                                                                 |      |          |         | 10207       |
|       | <b>Total</b>                                                                                                                                       |      |          |         | 212870      |

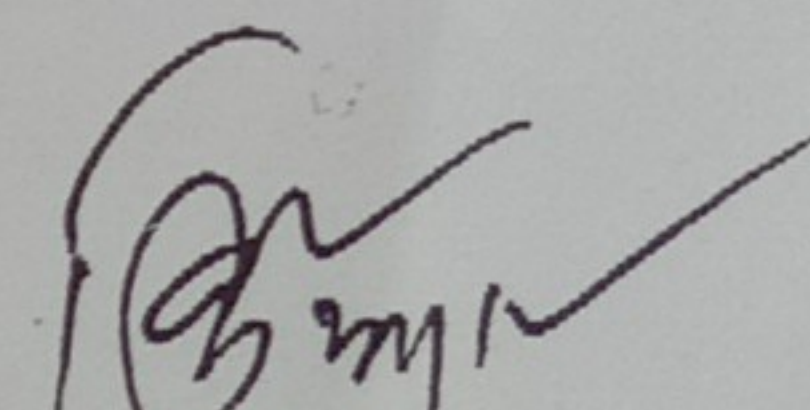
Rs-2,12,870=00

  
J.E.

Work Section Darbhanga-2

  
A.E.

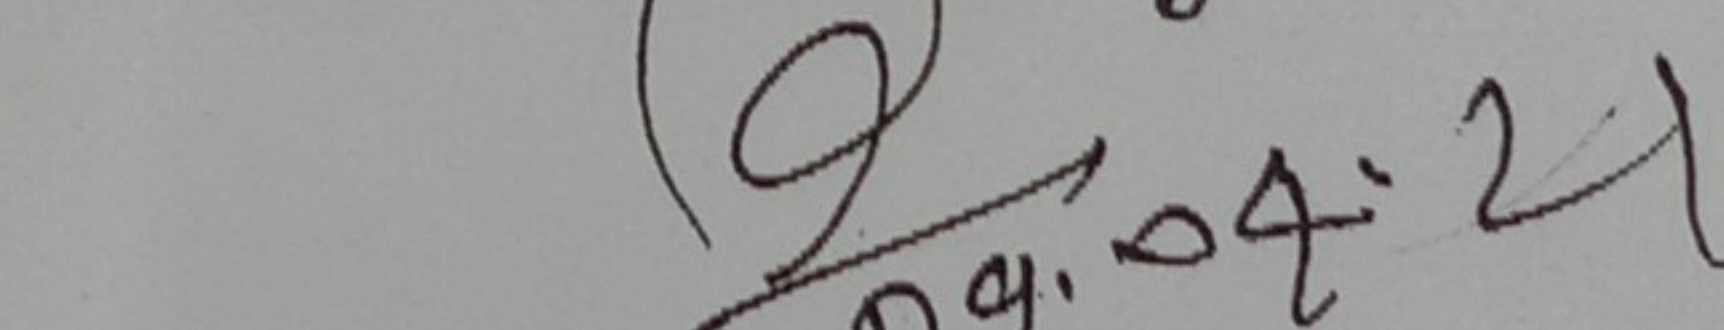
Work Sub-Division  
Darbhanga

  
E.E.

RWD Darbhanga -1

कार्यपालक अभियंता द्वारा कां वि० कार्यप्रमाणित पुलपरास के पत्रांक 542, अनु० 1  
दिनांक 07/04/2021. 10 द्वारा समायित जॉन प्रतिवेदन के आधार पर -

Post-Facto T/A Rs-2,12,870=00 (Rupees Two Lacs Twelve Thous-  
and eight hundred seventy) only

  
09.04.21  
Superintending Engineer  
RWD, Works Circle, Darbhanga  
09/04/2021

Detailed Estimate for Temporary Restoration of Ranipur T07,SH, Madhopur to Ketuka road for the year 2020 -21.

Total Restoration Length -29.5 M  
Length -5.26 km

Block -Darbhanga

R.W.D.[W] Division -Darbhanga -1

| S.N. | item                                                                                                                                               | No. | Length (M) | Width(M)        | Depth (M)(AV)     | Quantity (cum) |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------|-----|------------|-----------------|-------------------|----------------|
| 1    | Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I . |     |            |                 |                   |                |
|      | Chainage in M                                                                                                                                      |     |            |                 |                   |                |
|      | Near SH                                                                                                                                            | 1   | 29.50      | $(4.10+8.30)/2$ | $(0.30+0.0.75)/2$ | 96.023         |
|      | <b>Total Qty.</b>                                                                                                                                  |     |            |                 |                   | <b>96.023</b>  |

*[Signature]*  
J.E.

*[Signature]*  
28/12/20  
A.E.

*[Signature]*  
E.E.

RWD(W) Division Darbhanga -1