

ABSTRACT

Road name - Temporary Restoration of Road from NH, T04 To Bijuli

Block-DARBHANGA

RWD (W) DIVISION DARBHANGA -1

Road Actual Length - 2.037 KM

Effect Road Length 31.00 M.

S.No.	ITEM	UNIT	QUANTITY	RATE	AMOUNT (Rs)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I.	CUM	116.769	1867.76	218096
	Add G.S.T. 12 %				26172
	Add 1 % Labor cess				2181
	Seigniorage Fee @1063.00/cum x0.10				12413
	Total				258862

[Signature]
J.E.

Work Section Darbhanga-2

[Signature]
A.E.

Work Sub-Division
Darbhanga

[Signature]
E.E.

RWD Darbhanga -1

Rs-2,58,862/-

कार्यपालक अभियंता द्वारा कां किं कार्य प्रमाणित पुल परास के पत्रांक 542 अंकुश
दिनांक 07/04/2021 को द्वारा प्रमाणित जाय प्रमाणित के आधार पर —
Post-Facto T/A for Rs-2,58,862/- (Rupees Two Lacs fifty eight thousand
and eight hundred sixty two) only

[Signature]
09.04.21

Superintending Engineer
RWD, Works Circle, Darbhanga
09/04/2021

Detailed Estimate for Temporary Restoration of NH ,T04 To Bijuli road for the year 2020
-21.

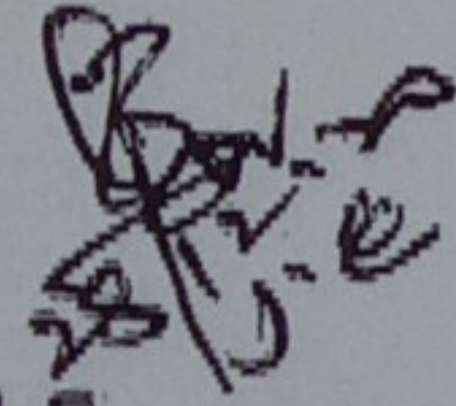
Block -Darbhanga

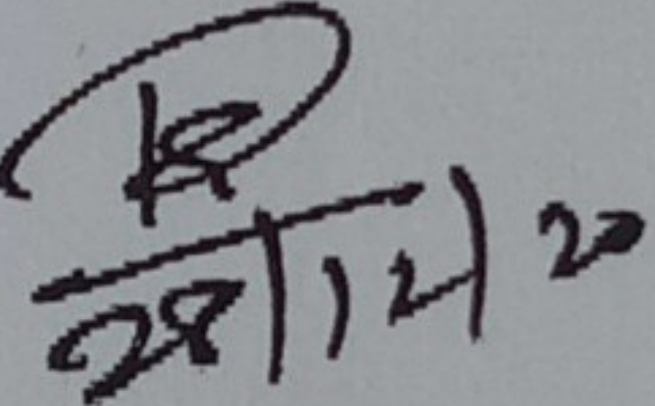
Total Restoration Length -31.00 M

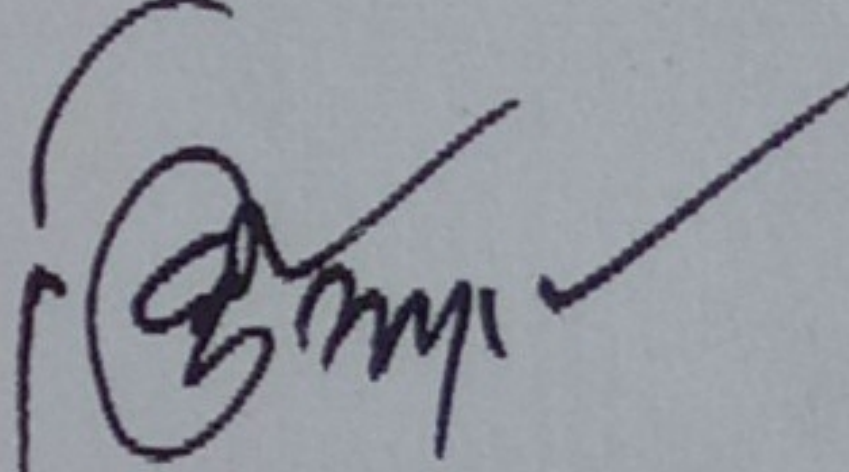
R.W.D.[W] Division -Darbhanga -1

Length -2.037 km

S.N.	item	No.	Length (M)	Width(M)	Depth (M)(AV)	Quantity (cum)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I .					
	Chainage in M					
		1	6.00	(5.00+7.50)/2	1.500	56.250
		1	5.50	(1.20+2.00)/2	1.250	11.000
		1	17.00	(1.20+2.50)/2	1.500	47.175
		1	2.50	1.25	0.750	2.344
	Total Qty.					116.769


J.E.


A.E.


E.E.

RWD(W) Division Darbhanga -1