

ABSTRACT

For Temporary Restoration

Road Name- Darbhanga district under NH-57 Shahpur village Ketuka congenial to check flywt

Block-DARBHANGA

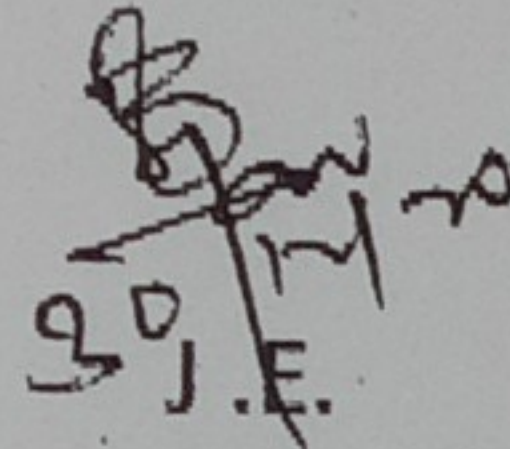
RWD (W) DIVISION DARBHANGA -1

Road Actual Length - ~~1.005 KM~~ 4.35 k.m.

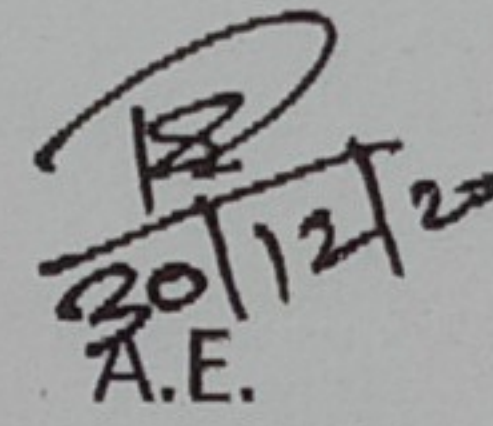
Efected Road Length - 783.60 M.

S.No.		UNIT	QUANTITY	RATE	AMOUNT (Rs)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I.	CUM	561.694	1867.76	1049110
	Add G.S.T. 12 %				125893
	Add 1 % Labor cess				10491
	Seigniorage Fee @1063.00/cum x0.10				59708
					1245202

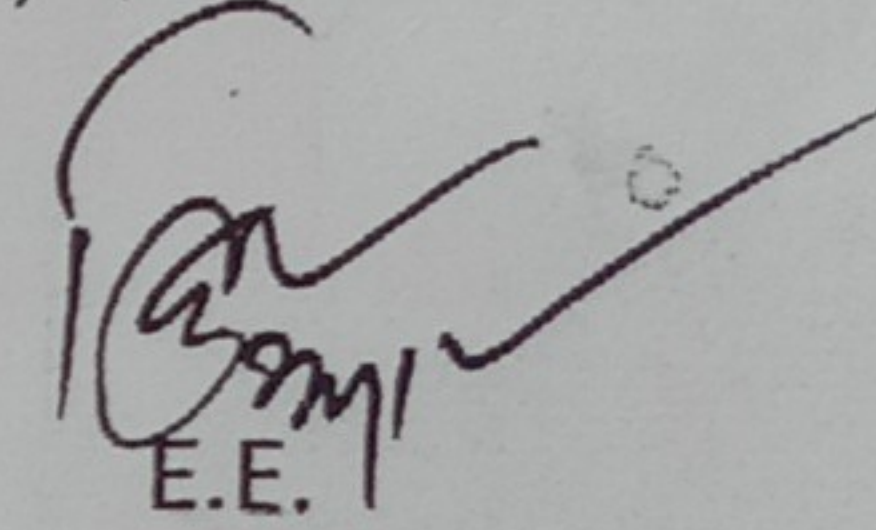
Rs- 12,45,202 =w


J.E.

Work Section Darbhanga-2


A.E.

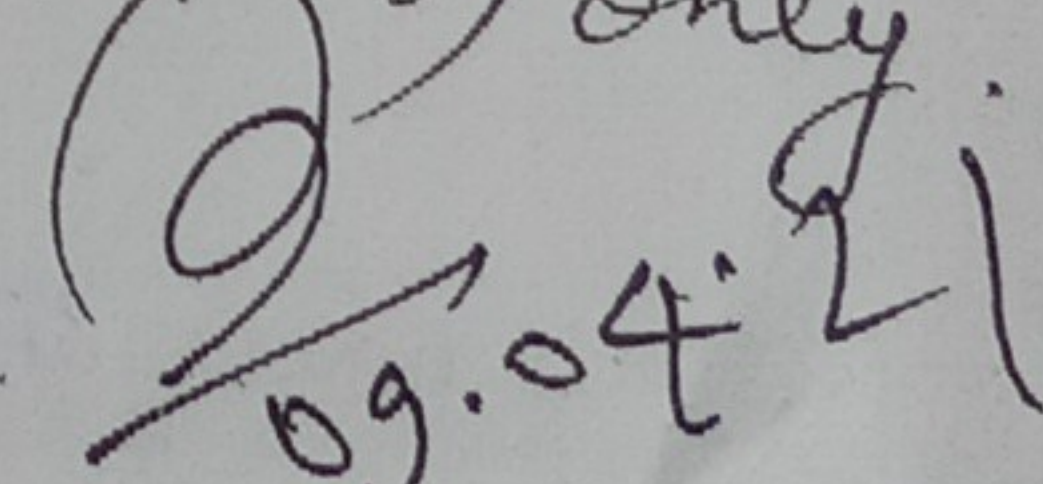
Work Sub-Division
Darbhanga


E.E.

RWD Darbhanga -1

कार्यपालक अभिर्भवा ग्राह कार विर कार्यप्रमंडल- फुलपरास के पत्रांक 542 अनु 1
दिनांक 07/04/2021. / के द्वारा समर्पित ऑय प्रतिवेदन के आधार पर।

Post-Fecto T/A for Rs- 12,45,202 =w (Rupees Twelve lac
Fortyfive thousand two hundred two) only.


09.04.21
Superintending Engineer
RWD, Works Circle, Darbhanga
09/04/2021

Detailed Estimate for Temporary Restoration of Road for the year 2020 -21.

oad Name- Darbhanga district under NH-57 Shahpur village Ketuka congenial to check flywheel

ock -Darbhanga

Total Restoration Length -783.60 M

W.D.[W] Division -Darbhanga -1

Length -4.35 KM

.N.	Item	No.	Length (M)	Width(M)	Depth (M)(AV)	Quantity (cum)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I .					
	Chainage in M					
	42	1	16.00	3.65	(0.60+0.30)/2	26.280
	73	1	3.00	1.30	0.200	0.780
	77	1	7.00	(2.4+1.2)	0.225	2.520
	84	1	26.00	2.00	0.225	11.700
		1	26.00	1.20	0.225	7.020
	120	1	11.00	1.50	0.200	3.300
	131	2	14.00	1.25	0.225	7.875
	150	1	14.00	3.75	0.300	15.750
	216	1	17.00	1.40	0.225	5.355
	249	1	7.00	2.20	0.300	4.620
	269	1	3.50	1.10	0.300	1.155
		1	2.50	1.10	0.225	0.619
	289	1	4.00	1.50	0.225	1.350
	295	1	5.00	1.10	0.225	1.238
		1	3.00	0.90	0.225	0.608
	302	1	8.00	1.60	0.225	2.880
		1	1.25	1.30	0.150	0.244
		1	1.50	0.60	0.150	0.135
	320	1	1.30	0.60	0.150	0.117
	320	1	3.00	0.60	0.150	0.270
		1	2.00	0.90	0.150	0.270
	361	1	7.50	1.50	0.200	2.250
	394	1	10.00	1.25	0.250	3.125
	402	1	12.00	1.10	0.200	2.640
		1	15.00	1.00	0.225	3.375
	437	1	9.00	1.00	0.200	1.800
		1	3.00	0.60	0.200	0.360
		1	0.65	2.00	0.200	0.260
	505	1	4.50	0.90	0.150	0.608
	524	1	3.50	1.25	0.200	0.875

30/12/20
5-6

id Name- Darbhanga district under NH-57 Shahpur village Ketuka congenial to check flywheel

k -Darbhanga

Total Restoration Length = 783.60 M

D.[W] Division -Darbhanga -1

Length - ~~1.005 KM~~ 4.25 K.M.

item	No.	Length (M)	Width(M)	Depth (M)(AV)	Quantity (cum)
	1	3.00	2.50	0.150	1.125
560	1	5.00	3.00	0.150	2.250
	1	16.00	1.00	0.700	3.200
613	1	8.00	0.80	0.15	0.960
	1	3.00	0.90	0.200	0.540
640	1	1.90	1.00	0.30	0.570
660	1	4.10	(1.00+1.90)/2	1.000	5.945
1222 M (Broken Bridge)	1	5.00	1.2	0.5	3.000
	1	5.00	0.7	0.3	1.050
	1	5.10	4.85	(0.45+0.90)/2	16.696
1240	1	3.25	4.50	1.250	18.281
1294	1	0.70	0.60	0.225	0.095
	2	0.60	1.10	0.300	0.396
	1	4.50	2.200	0.150	1.485
	1	2.60	0.70	0.350	0.637
	1	3.25	2.30	0.200	1.495
1725	1	2.00	3.00	0.225	1.350
	1	3.00	1.50	0.300	1.350
	1	1.50	0.60	0.150	0.135
1872	1	8.00	2.75	0.225	4.950
	1	5.00	2.80	0.225	3.150
3077	1	9.70	(2.30+3.30)/2	1.300	35.308
	1	9.00	(1.20+2.10)/2	(1.50+1.00)/2	18.000
3093	1	5.20	2.45	1.00	12.740
	1	2.70	1.50	0.35	1.418
	1	3.50	0.70	0.30	0.735
3478	1	2.40	2.20	0.30	1.584
Towards north from ketuka chauk	1	10.50	2.90	0.15	4.568
	1	3.50	3.50	0.45	5.513
4137	1	29.00	0.45	0.30	3.915
	1	16.00	0.45	0.30	2.160
4178	2	63.00	(0.60+1.10)/2	(0.70+0.90)/2	85.680
east side	1	15.00	0.50	0.50	3.750
	1	10.00	(0.30+0.50)/2	0.30	1.200
	1	22.00	0.60	0.80	10.560

[Signature]

Road Name- Darbhanga district under NH-57 Shahpur village Ketuka congenial to check flywheel

Block -Darbhanga

Total Restoration Length -783.60 M

R.W.D.[W] Division -Darbhanga -1

Length -~~1.005 KM~~ 4.35 K.M.

S.N.	item	No.	Length (M)	Width(M)	Depth (M)(AV)	Quantity (cum)
	4232	2	91.00	(0.60+1.00)/2	(0.90+1.35)/2	81.900
		2	6.00	0.45	0.30	1.620
	east side	1	10.00	(0.60+0.90)/2	1.30	9.750
		1	8.00	(0.60+0.90)/2	0.60	3.600
	Part Road-ii 82 M	1	2.70	1.10	0.225	0.668
	134	1	4.50	3.75	0.23	3.797
		1	1.20	1.25	0.15	0.225
	168	1	3.00	1.80	0.20	1.080
	178	1	8.20	1.00	0.20	1.640
	195	1	5.00	1.60	0.15	1.200
	199	1	4.10	2.80	0.23	2.583
		1	1.10	1.40	0.15	0.231
	215	1	6.00	3.70	0.23	4.995
	223	1	7.00	2.00	0.20	2.800
		1	5.00	3.70	0.23	4.163
	240	1	6.10	1.10	0.15	1.007
		1	2.20	1.10	0.15	0.363
		1	0.70	0.45	0.15	0.047
	254	1	5.00	2.50	0.30	3.750
	266	1	3.10	0.60	0.15	0.279
	283	1	1.60	0.45	0.15	0.108
		1	2.50	1.10	0.15	0.413
	415	1	4.50	1.20	0.15	0.810
		1	1.70	1.80	0.15	0.459
		1	2.20	1.80	0.15	0.594
		1	1.00	1.25	0.15	0.188
	515	1	1.30	1.10	0.15	0.215
		1	1.30	1.20	0.15	0.234
	695	1	2.20	1.10	0.20	0.484
		1	1.50	1.30	0.15	0.293
		1	0.60	0.70	0.15	0.063
		1	1.40	1.50	0.15	0.315
		1	1.70	2.20	0.15	0.561
		1	1.00	1.00	0.15	0.150
		1	10.00	1.20	0.23	2.700

[Signature]

Name- Darbhanga district under NH-57 Shahpur village Ketuka congenial to check flywheel

-Darbhanga

D.(W) Division -Darbhanga -1

Total Restoration Length -783.60 M.

Length -~~1005 KM~~ 4.25 k.m.

item	No.	Length (M)	Width(M)	Depth (M)(AV)	Quantity (cum)
877	1	5.50	1.40	0.23	1.733
	1	2.70	0.90	0.15	0.365
988	1	3.80	2.30	0.20	1.748
	1	24.00	(3.50+7.50)/2	0.450	59.400
Total Qty .		783.60			561.694

J.E.

RWD

A.E.

RWD

E.E.

RWD(W) Division Darbhanga -1