

ABSTRACT

Road name - Temporary Restoration of Road from NH Bhawanipur Math to
Khartua Four lane

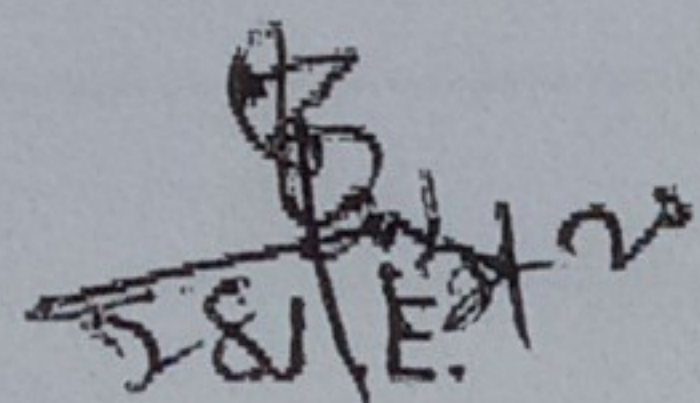
Block-DARBHANGA

RWD (W) DIVISION DARBHANGA -1

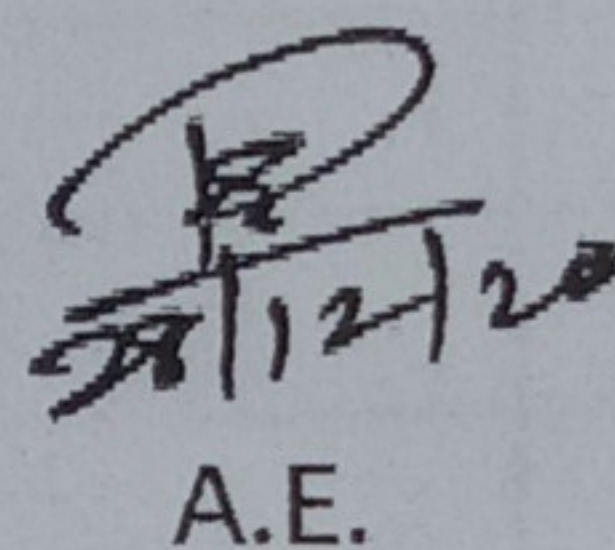
Road Actual Length - 1.495 KM

Efected Road Length 53.10 M.

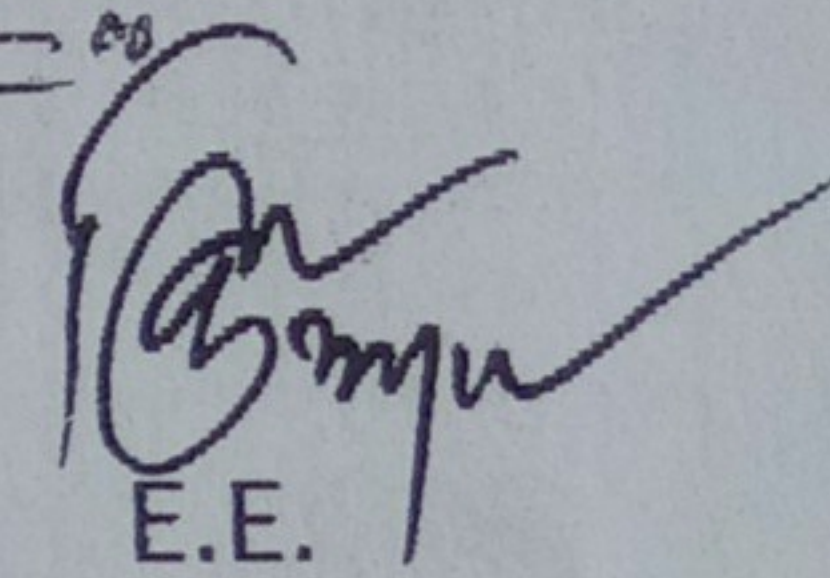
S.No.	ITEM	UNIT	QUANTITY	RATE	AMOUNT (Rs)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I .	CUM	108.200	1867.76	202092
	Add G.S.T. 12 %				24251
	Add 1 % Labor cess				2021
	Seigniorage Fee @1063.00/cum x0.10				11502
	Total				239865


S.E.

Work Section Darbhanga-2


A.E.

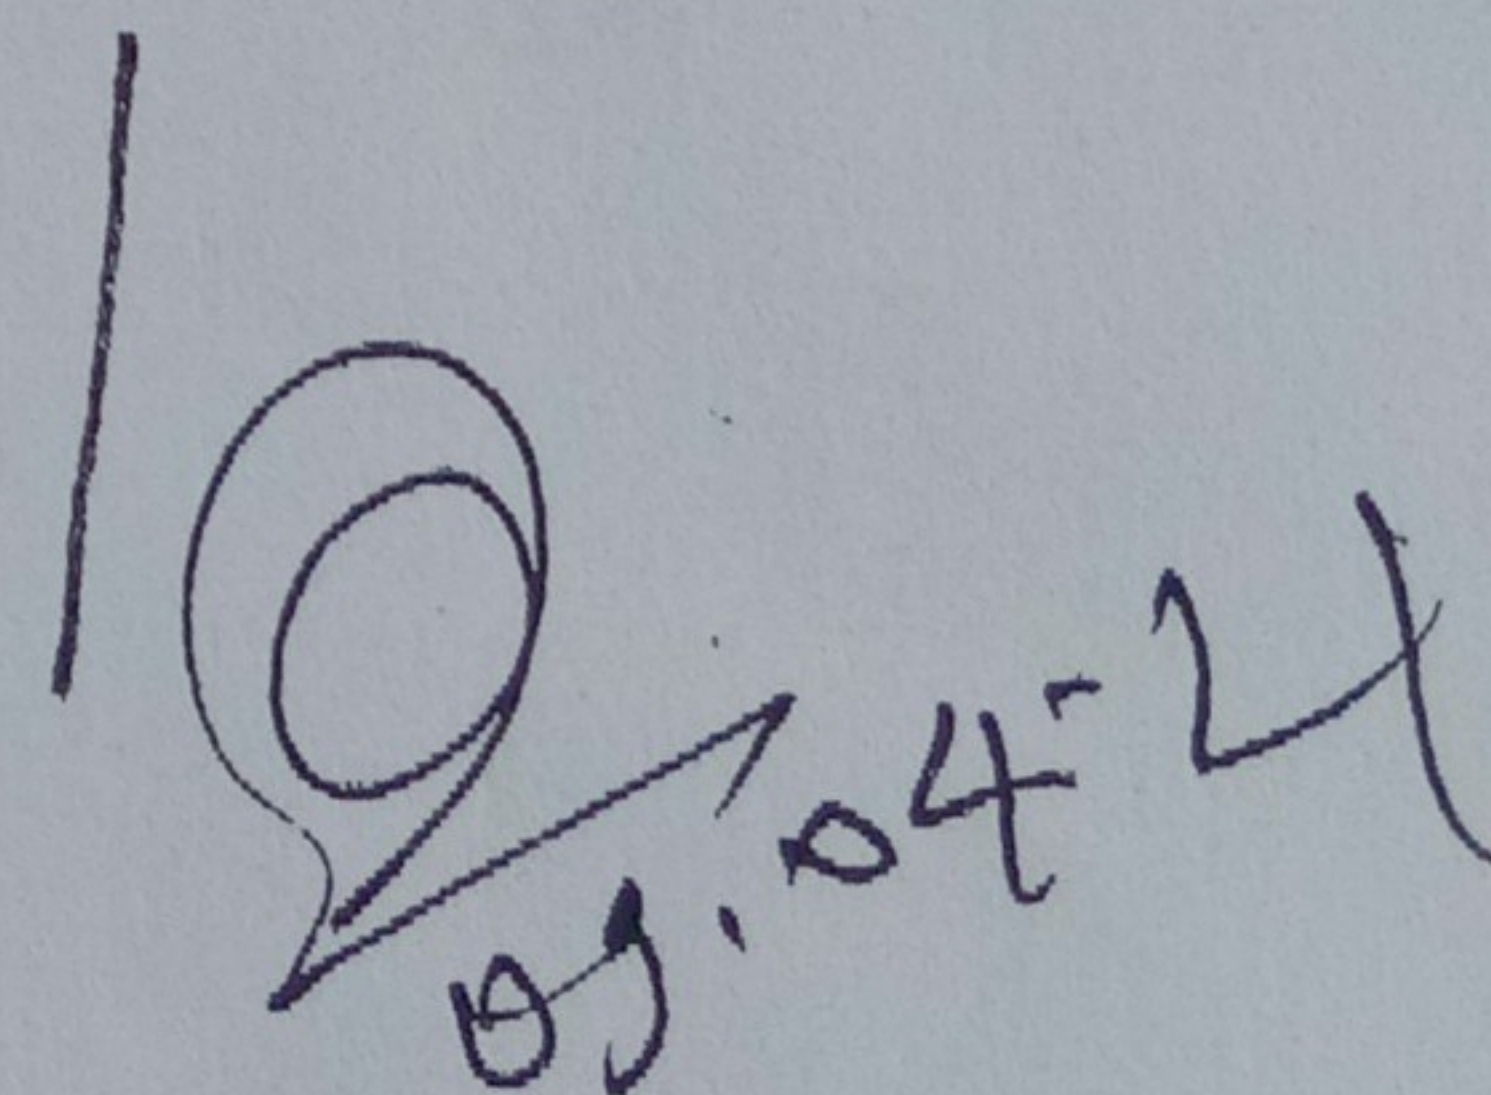
Work Sub-Division
Darbhanga

Rs - 2,39,865 =

E.E.

RWD Darbhanga -1

कार्यपालक अभियंता द्वारा प्राप्त कार्य प्रमाणपत्र फलपरास के पत्रांक 54.2 3
दिनांक 07/04/2021 के द्वारा समर्पित जांच प्रतिक्रिया के आधार पर —

Post-Facto T/A for Rs - 2,39,865 = (Rupees Two Lacs thirty
and eight hundred sixty five) only


09/04/21

Superintending Engineer
RWD, Works Circle, Darbhanga
09/04/2021

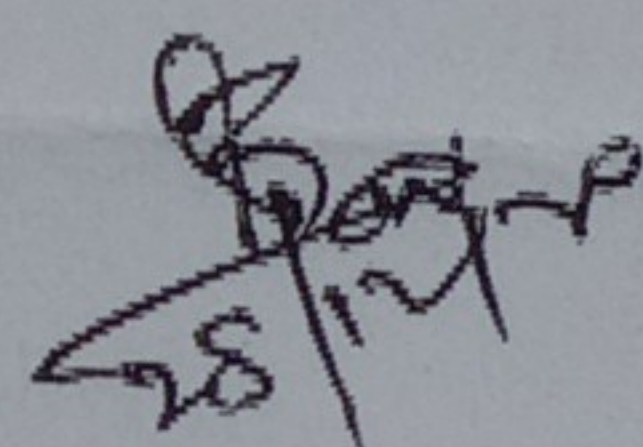
Detailed Estimate for Temporary Restoration of NH Bhawanipur Math to khartua four lane road for the year 2020 -21.

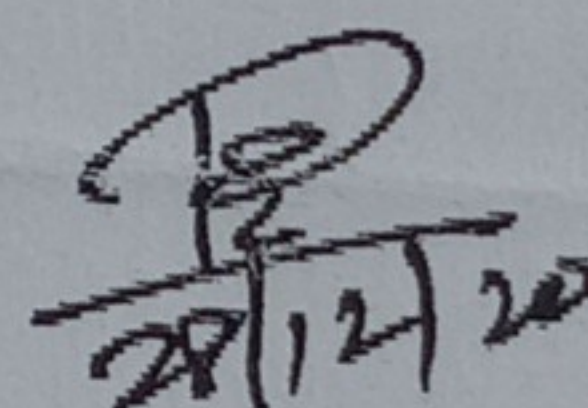
Block -Darbhanga

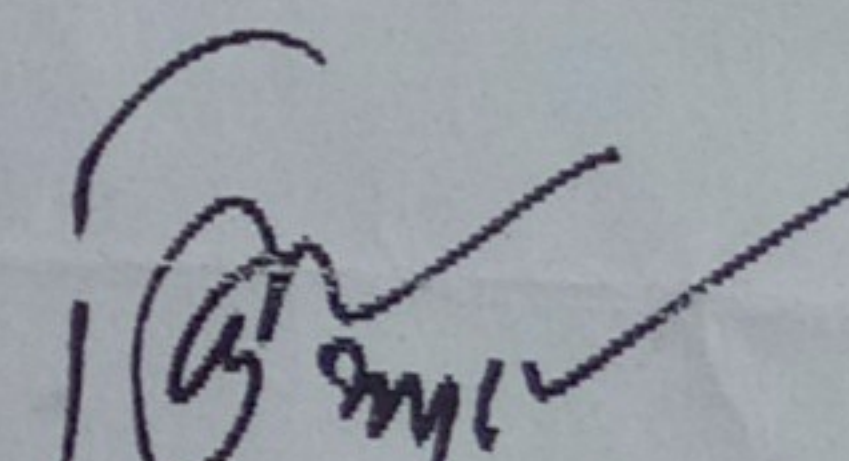
R.W.D.[W] Division -Darbhanga -1

Total Restoration Length -53.10 M
Length -1.495 km

S.N.	item	No.	Length (M)	Width(M)	Depth (M)(AV)	Quantity (cum)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I .					
	Chainage in M					
	600	1	1.80	1.90	0.225	0.770
		1	11.00	3.60	0.900	35.640
	To	1	3.80	1.90	0.300	2.166
		1	1.80	1.20	0.200	0.432
	800	1	29.20	3.75	0.600	65.700
	850	1	1.60	1.20	0.300	0.576
		1	2.10	1.80	0.300	1.134
	950	1	1.80	2.20	0.450	1.782
	Total Qty.					108.200


28/12/20
J.E.


28/12/20
A.E.


E.E.

RWD(W) Division Darbhanga -1