

ABSTRACT

Road name - Temporary Restoration of Road from Khutwara to Purwari tola

Block-DARBHANGA

RWD (W) DIVISION DARBHANGA -1

Road Actual Length - 2.40 KM

Efected Road Length 54.50 M.

S.No.	ITEM	UNIT	QUANTITY	RATE	AMOUNT (Rs)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I.	CUM	146.412	1867.76	273462
	Add G.S.T. 12 %				32815
	Add 1 % Labor cess				2735
	Seigniorage Fee @1063.00/cum x0.10				15564
	Total				324576

[Signature]
J.E.

Work Section Darbhanga-2

[Signature]
28/12/20
A.E.

Work Sub-Division
Darbhanga

[Signature]
E.E.

RWD Darbhanga -1

कार्यपालक अभियंता, रात का वि. कार्यप्रणाली - पुलपुरास का पत्र 542 अ. 30/ दिनांक:- 07/04/2021 के द्वारा सुनिश्चित किया गया है कि आवा (पर-

Joint-Facto T/A For Rs 3,24,576 = 00 (Rupees Three lacs - twenty four thousand five hundred seventy six) only

[Signature]
09.04.21
Superintending Engineer
RWD, Works Circle, Darbhanga
09/04/2021

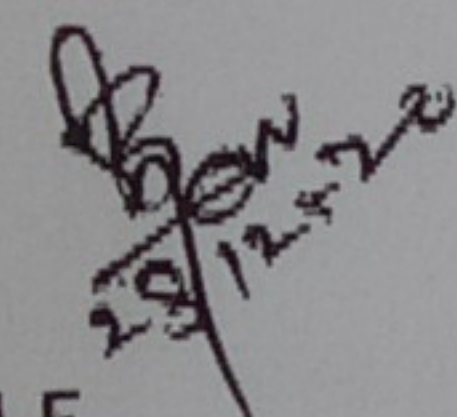
Detailed Estimate for Temporary Restoration of Khutwara to Purwari tola road for the year 2020 -21.

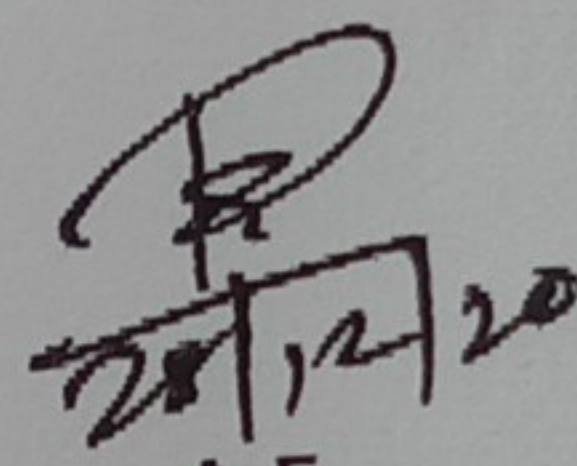
Block -Darbhanga

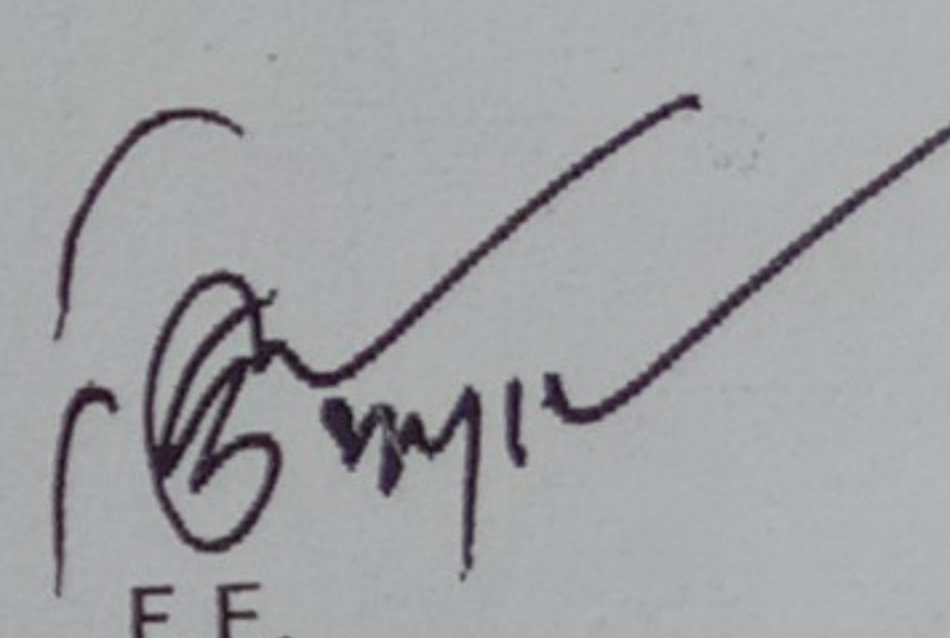
R.W.D.[W] Division -Darbhanga -1

Total Restoration Length -54.50 M
Length -2.40 km

S.N.	item	No.	Length (M)	Width(M)	Depth (M)(AV)	Quantity (cum)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I .					
	Chainage in M					
	Near pond	1	14.50	2.80	0.300	12.180
	west side	1	16.40	0.45	0.450	3.321
	Towards pond	1	18.50	(0.50+3.75)/2	2.250	88.453
	Near middle school culvert	1	5.10	3.70	2.250	42.458
	Total Qty.					146.412 ✓


J.E.


A.E.


E.E.
RWD(W) Division Darbhanga -1