

ABSTRACT

Road name - Temporary Restoration of Road from Mathurapur to Sidhaura Ghat

Block-DARBHANGA

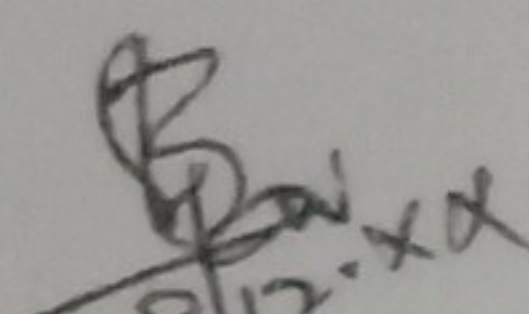
RWD (W) DIVISION DARBHANGA -1

Road Actual Length - 0.975 KM

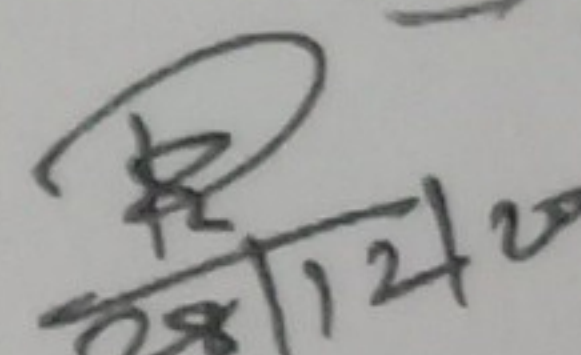
Efected Road Length 330.55 M.

S.No.	ITEM	UNIT	QUANTITY	RATE	AMOUNT (Rs)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I.	CUM	443.729	1867.76	828779
	Add G.S.T. 12 %				99454
	Add 1 % Labor cess				8288
	Seigniorage Fee @1063.00/cum x0.10				47168
	Total				983689

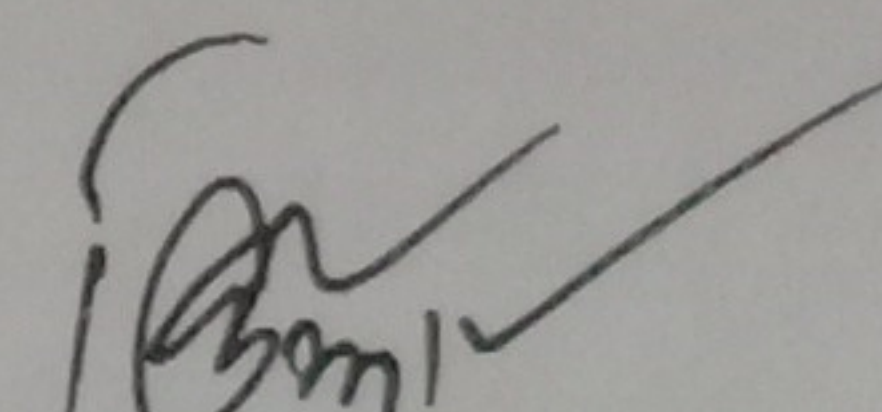
Rs. 9,83,689/-


28/12/20
J.E.

Work Section Darbhanga-2


28/12/20
A.E.

Work Sub-Division
Darbhanga


E.E.

RWD Darbhanga -1

परिचालक अभियंता, ग्राहक कार्यालय, कार्य प्रमंडल - कुमारास का पत्रांक 542313/1
दिनांक:- 07/04/2021 के द्वारा स्वीकृत और प्रमाणित के आदेश पर -

Post-Facto T/A 78 Rs 9,83,689/- (Rupees Nine lacs - eighty three thousand six hundred eighty nine paise)
09.04.21

Superintending Engineer
RWD, Works Circle, Darbhanga
09/04/2021

Detailed Estimate for Temporary Restoration of Mathurapur to Sidhaura Ghat road for the year 2020 -21.

Block -Darbhanga

R.W.D.[W] Division -Darbhanga -1

Total Restoration Length -330.55 M

Length -0.975 km

S.N.	item	No.	Length (M)	Width(M)	Depth (M)(AV)	Quantity (cum)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I .					
	Chainage in M					
	200	1	11.00	2.90	0.650	20.735
	260	1	5.00	0.70	0.300	1.050
	To	1	6.00	2.50	0.450	6.750
		1	7.00	1.50	0.250	2.625
		1	20.00	3.00	0.600	36.000
	350	1	6.10	1.10	0.300	2.013
	To	1	31.00	2.90	0.900	80.910
		1	5.00	0.90	0.300	1.350
		1	11.00	2.80	0.450	13.860
	at curve	1	13.00	0.65	0.300	2.535
	"	1	30.00	2.50	0.450	33.750
		1	8.50	2.70	0.250	5.738
	725	1	13.00	2.70	0.250	8.775
		1	14.00	2.70	0.250	9.450
		1	8.70	2.80	0.350	8.526
	To	1	4.25	2.60	0.300	3.315
		2	30.00	2.70	0.450	72.900
		1	25.00	2.70	(0.30+0.60)/2	30.375
		1	11.00	2.70	0.300	8.910
	904	1	15.00	3.00	0.300	13.500
		1	18.00	3.00	0.300	16.200
	To	1	3.50	3.00	0.300	3.150
	941	1	30.00	3.10	0.600	55.800
	971	1	4.50	3.50	0.350	5.513
	Total Qty.					443.729

28/12-20
J.B

28/12/20
A.E

E.E
R.W.D. Darbhanga