

ABSTRACT

Road name - Temporary Restoration of Road from Sonhan Chirmara to
Chirmara

Block-DARBHANGA

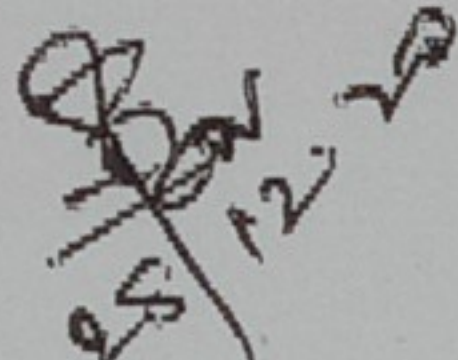
RWD (W) DIVISION DARBHANGA -1

Road Actual Length - 1.88 KM

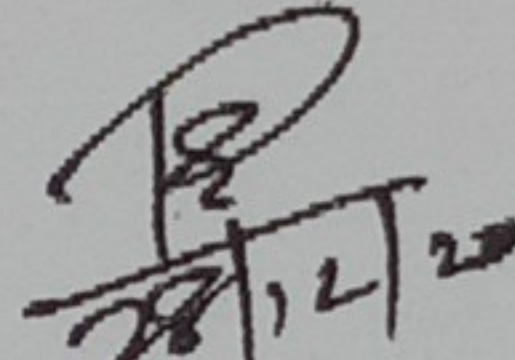
Efected Road Length 37.10 M.

S.No.	ITEM	UNIT	QUANTITY	RATE	AMOUNT (Rs)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I .	CUM	85.065	1867.76	158881
	Add G.S.T. 12 %				19066
	Add 1 % Labor cess				1589
	Seigniorage Fee @1063.00/cum x0.10				9042
	Total				188578

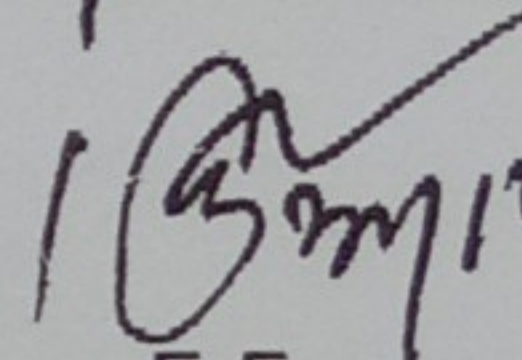
Rb-1,88,578/-


J.E.

Work Section Darbhanga-2


A.E.

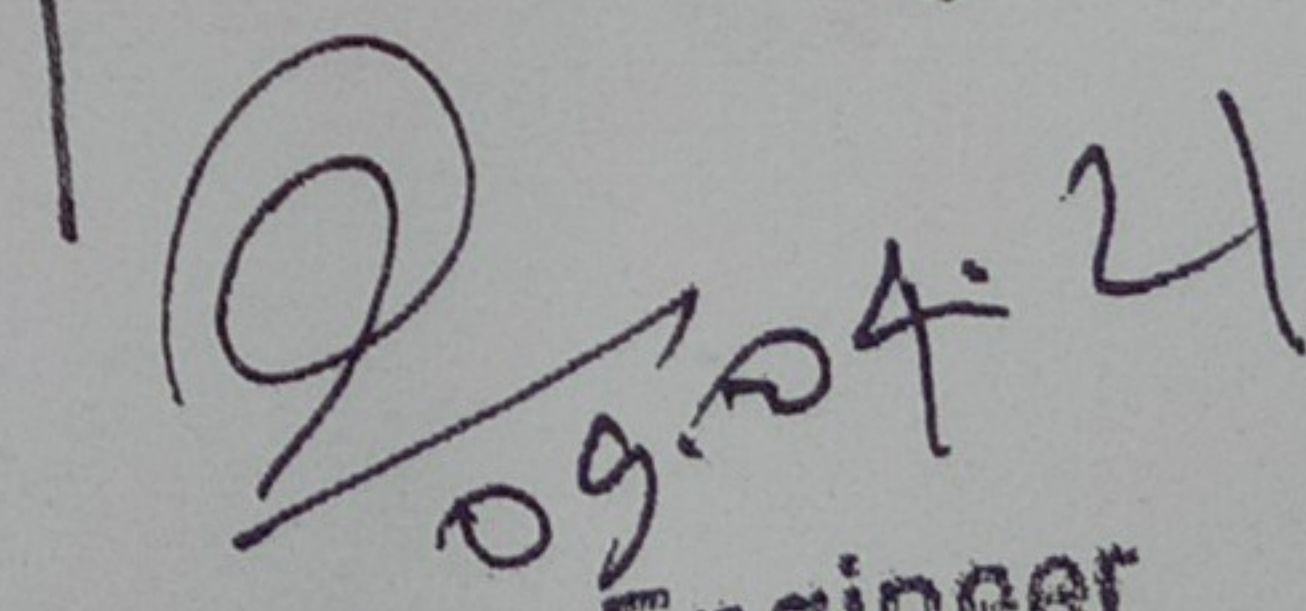
Work Sub-Division
Darbhanga


E.E.

RWD Darbhanga -1

कार्यपालक अभियंता द्वारा कां वि० कार्यप्रमाणन फलपत्रासंकेपत्रांक 542 अ०
दिनांक 07/04/2024. के द्वारा समर्पित जाय प्रतिकेहन के आधार पर -

Post - Fecto T/A for Rb-1,88,578/- (Rupees one Lacs eighty eight
Thousand five hundred seventy eight) only


09.04.24
Superintending Engineer
RWD, Works Circle, Darbhanga
09/04/2024

Detailed Estimate for Temporary Restoration of Ranipur Sonhan Chirmara to Chirmara road for the year 2020 -21.

Block -Darbhanga

R.W.D.[W] Division -Darbhanga -1

Total Restoration Length -37.10 M
Length -1.88 km

S.N.	item	No.	Length (M)	Width(M)	Depth (M)(AV)	Quantity (cum)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I .					
	Chainage in M					
	0	1	2.50	4.00	0.225	2.250
	10	1	15.00	3.75	0.300	16.875
	30	1	1.50	1.60	0.150	0.360
		1	6.10	(2.50+3.50)/2	0.600	10.980
	400	1	12.00	(2.70+4.30)/2	(0.60+2.00)/2	54.600
	Total Qty.		37.10			85.065

[Signature]
28/12/20
J.E.

[Signature]
28/12/20
A.E.

[Signature]
E.E.

RWD(W) Division Darbhanga -1