



बिहार सरकार

## GOVERNMENT OF BIHAR

NAME OF WORK :- Restoration work of Road from JUTE KENDRA TO LAUA GHAT

(FDR PART-A)

Total Length 0.850 KM

Restoration Length 0.009

Block:- PURNEA EAST

### DETAILED PROJECT REPORT

UNDER FDR (2245)

### ESTIMATED COST

Rs. 2,59,321.00

**-: PREPARED BY :-**

**EXECUTIVE ENGINEER**

**R.W.D. (W) DIVISION PURNEA**

## तकनीकी प्रतिवेदन

योजना का नाम:- जुह केन्द्र से लाकल बालू बंध

क्षतिग्रस्त पथ की लम्बाई:- 0.026 K.M. 0.009 Km

प्राक्कलित राशि:- रु 2,593 लाख 2,593 लाख

योजना शीर्ष :- **2245 F.D.R.**

प्राधिकार :- सचिव, ग्रामीण कार्य विभाग, बिहार, पटना का पत्रांक :-2789,

दिनांक - 21-08-2020

### प्रतिवेदन

प्रस्तुत प्राक्कलन अतिवृष्टि/बाढ़ के कारण क्षतिग्रस्त पथ के पथांश का प्राक्कलन

रु0 2,593 लाख मात्र के लिए ग्रामीण कार्य विभाग, कार्य प्रमण्डल पुर्णिया के द्वारा शीर्ष F.D.R. 2245 के अन्तर्गत तैयार किया गया है।

पथ के आकस्मिक मरम्मति हेतु पथांशों में मिट्टी भरवाई, खाली सिमेंट बैग में लाकल बालू भरकर, बॉस का पाइल, चचरी, बॉस का रनर, ह्यूम पाइप एवं ब्रिक बैट इत्यादि से भरकर बचाव कार्य करते हुए यातायात पुर्नस्थापित किया गया है।

पथ मरम्मति कार्य का प्राक्कलन वर्तमान अनुसूचित दर एवं सामग्री की दुलाई निकटतम खदान से प्रावधान कर बनाया गया है। दर गणना में संवेदक लाभांश सम्मिलित नहीं है। उक्त कार्य को विभागीय रूप से कराए जाने हेतु आदेश प्राप्त है। (प्रति संलग्न) एवं प्रशासनिक स्वीकृति हेतु तकनीकी अनुमोदन आपेक्षित है।

प्रमाणित किया जाता है कि प्राक्कलन कार्य स्थल के अनुरूप है।

21/08/2021

कनीय अभियंता  
ग्रामीण कार्य विभाग

23/08/2021

सहायक अभियंता  
ग्रामीण कार्य विभाग

23/08/21

कार्यपालक अभियंता  
ग्रामीण कार्य विभाग

**मुख्य अभियंता-4 का कार्यालय**  
**ग्रामीण कार्य विभाग**

पत्रांक- मु0अ0-4(मु0)विविध(कार्य)-23-60/2020/4672 दिनांक-17/12/2020

प्रेषक-

विनय कुमार,  
नोडल पदाधिकारी,  
शीर्ष - FDR

सेवा में,

सभी कार्यपालक अभियंता,  
कार्य प्रमंडल,  
ग्रामीण कार्य विभाग

विषय:- वर्ष 2020 की बाढ़/अतिवृष्टि से क्षतिग्रस्त मोटरबुल किए गए पथों की विवरणी  
MIS के FDR Module में upload करने के संबंध में।

महाशय,

उपर्युक्त विषय के संबंध में कहना है कि वर्ष 2020 की बाढ़/अतिवृष्टि से क्षतिग्रस्त वैसे पथ जिसमें मोटरबुल कार्य कराया गया है, उन पथों का सक्षम पदाधिकारी से अनुमोदित प्राक्कलन, मापी पुस्त एवं अपने अंचल के असम्बद्ध कार्यपालक अभियंता का जाँच प्रतिवेदन MIS अंतर्गत FDR Module के Action Taken Report Phase-1 में upload अचूक रूप से 7 दिनों के अंदर कर दें। इस संबंध में आप लोगों को पूर्व में स्मारित किया जा चुका है। अभी तक upload किए गए Data में यह पाया गया है कि एक ही पथ को दो बार entry किया गया है तथा upload किए गए माप पुस्त की राशि एवं amount column में अंकित राशि में अन्तर है।

अतः upload करने के समय निम्न बातों का ध्यान रखा जाय:-

(1) अपलोड करने के समय Module के प्रत्येक Column में शुद्धता से साथ entry करना सुनिश्चित किया जाय अन्यथा स्वीकृति नहीं मिलने की पूरी जिम्मेवारी आपकी होगी।

(2) इस संबंध में यह भी स्पष्ट करना है कि यदि किसी पथ में एक से अधिक जगह पर कटाव हुआ है तो उसका एक ही प्राक्कलन के अंतर्गत अलग-अलग कटाव का Quantity Calculation कर Abstract में लाया जाय तथा MIS में एक पथ का एक ही entry करते हुए क्षतिग्रस्त लम्बाई का जोड़ अंकित किया जाए।

इसे अतिआवश्यक समझा जाए।

विश्वासभाजन

*Benua*  
17/12/2020  
(विनय कुमार)

नोडल पदाधिकारी, FDR

ज्ञापाक- मु0अ0-4(मु0)विविध(कार्य)-23-60 / 2020 4672 / पटना, दिनांक-17/12/20

प्रतिलिपि:- सचिव, ग्रामीण कार्य विभाग के प्रधान आप्त सचिव/सभी अधीक्षण अभियंता, कार्य अंचल, ग्रामीण कार्य विभाग को सूचनार्थ एवं आवश्यक कार्यवाही हेतु प्रेषित।

*Benua*  
17/12/2020

नोडल पदाधिकारी, FDR


ज्ञापाक- मु0अ0-4(मु0)विविध(कार्य)-23-60 / 2020 4672 / पटना, दिनांक-17/12/20

प्रतिलिपि:- आई0टी0 मैनेजर, ग्रामीण कार्य विभाग, बिहार, पटना को विभागीय वेबसाइट पर अपलोड करने हेतु प्रेषित।

*Benua*  
17/12/2020

नोडल पदाधिकारी, FDR

JUTE KENDRA TO L049 GHAT URAWN TOLA

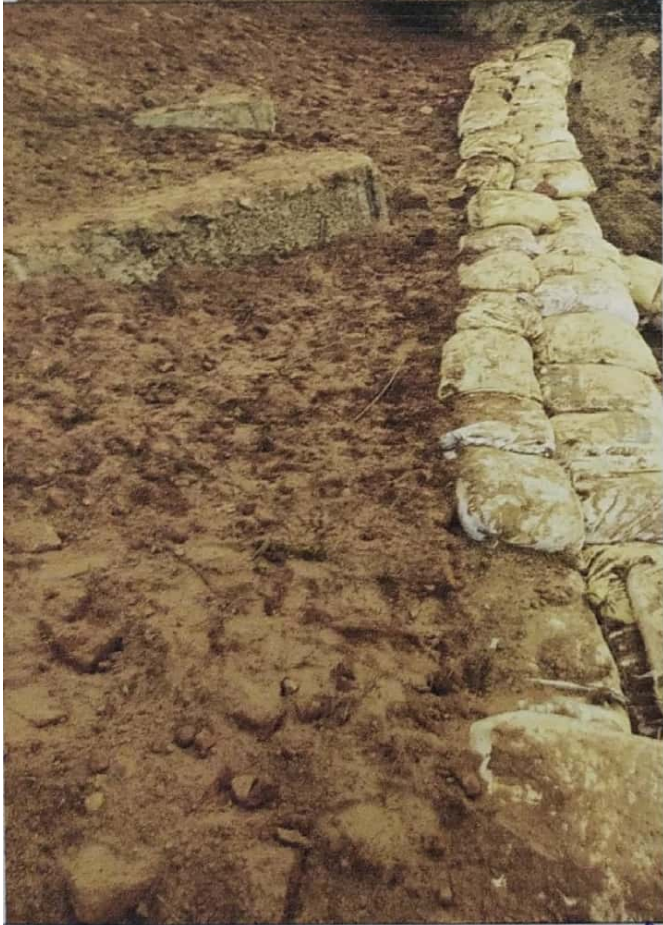

22/01/2021  
22/01/2021  
22/01/2021

23/01/2021

23/01/2021

NAME OF  
WORK:-

NAME OF WORK :- Restoration work of Road from JUTE KENDRA  
TO LAUA GHAT

Total Length :- 0.850 KM

Restoration Length :- 0.009

**ABSTRACT OF COST**

|                               |   |     |             |
|-------------------------------|---|-----|-------------|
| TOTAL COST OF CONSTRUCTION    | - | Rs. | 2,10,830.00 |
| Add for GST @ 12%             |   | Rs. | 25,300.00   |
| Add for Labour Cess @ 1%      |   | Rs. | 2,108.00    |
| Add for Seigniorage Fee @ 10% |   | Rs. | 21083.00    |
| GRAND TOTAL                   |   | Rs. | 2,59,321.00 |

*23/01/24*  
JE

*23/01/24*  
AE

*See RS 2,59,300 = 00*

*23/01/24*  
EE

*Technically Approved for RS 2,59,300 = 00 (Rupee two Lacs  
fifty nine thousand, three Hundred) only.*

*23.1.24*

**NAME OF WORK :- Restoration work of Road from JUTE KENDRA TO LAUA GHAT**

Length :- 0.850 KM

Restoration Length :- 0.009

| ITEM OF WORK S                                                                                                                                                                                                                                                    | Nos | Length  | Breadth                     | Height                          | QTY      | UNIT | RATE     | AMOUNT             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|---------|-----------------------------|---------------------------------|----------|------|----------|--------------------|
| Providing bricks bats including spreading laying hand packing and compacting with C.I. Hammer in layers not exceeding 75 mm thick including cost of providing light... All complete job as per specification and direction of engineer I/C. or assuming 2.832 cum |     |         |                             |                                 |          |      |          |                    |
| Ch                                                                                                                                                                                                                                                                | 1 x | 8.500 x | $(\frac{6.410 + 6.450}{2})$ | $x (\frac{1.800 + 1.500}{2}) =$ | 90.18    | Cum  |          |                    |
| Ditch                                                                                                                                                                                                                                                             | 1 x | 4.130 x | $(\frac{3.100 + 3.300}{2})$ | $x (\frac{1.050 + 1.200}{2}) =$ | 14.87    | Cum  |          |                    |
| Below HP                                                                                                                                                                                                                                                          | 1 x | 5.050 x | $(\frac{1.250 + 1.280}{2})$ | $x (\frac{1.500 + 1.050}{2}) =$ | 8.15     | Cum  |          |                    |
|                                                                                                                                                                                                                                                                   |     |         |                             |                                 | = 113.20 | Cum  | 1,717.37 | 1,94,406.00        |
| Providing including labour for filling empty cement bag with local sand, stitching the bag and placing including supply of sutali etc. all complete as per approved design, specification and direction of E/I                                                    |     |         |                             |                                 |          |      |          |                    |
|                                                                                                                                                                                                                                                                   |     |         |                             |                                 | 511.00   | No.  | 32.14    | 16,424.00          |
| <b>TOTAL</b>                                                                                                                                                                                                                                                      |     |         |                             |                                 |          |      |          | <b>2,10,830.00</b> |

23/01/2024

JE

23/01/2024

AE

23/01/21

EE

# BASIC RATES

## (A) Labour

| Sl. No. | Description of Labour         | Unit | Rate (Rs.) |
|---------|-------------------------------|------|------------|
| L-01    | Bhisti                        | day  | 287        |
| L-02    | Bitumen Sprayer(semi skilled) | day  | 302        |
| L-03    | Blacksmith,special            | day  | 345        |
| L-04    | Blaster, 2nd class            | day  | 477        |
| L-05    | Carpenter 1st Class           | day  | 345        |
| L-06    | Chips spreader, semi-skilled  | day  | 299        |
| L-06    | Chiseller (Skilled)           | day  | 388        |
| L-07    | Dresser (Skilled)             | day  | 367        |
| L-08    | Driller, 2nd class            | day  | 345        |
| L-09    | Electrician,skilled           | day  | 367        |
| L-10    | Fitter, skilled               | day  | 395        |
| L-11    | Mason (1st class)             | day  | 388        |
| L-12    | Mason (2nd Class)             | day  | 345        |
| L-13    | Mate, Semi skilled            | day  | 305        |
| L-14    | Mazdoor (Unskilled)           | day  | 287        |
| L-15    | Mazdoor (Semi skilled)        | day  | 299        |
| L-16    | Mazdoor (Skilled)             | day  | 364        |
| L-17    | Painter (1st class)           | day  | 364        |
| L-18    | Plumber, Special              | day  | 364        |
| L-19    | Surveyor                      | day  | 349        |
| L-20    | White Washer                  | day  | 364        |
| L-21    | Head blacksmith               | day  | 388        |
| L-22    | Welder 1 St Class             | day  | 434        |

(Basic Rates Taken From SOR, Thirteenth Edition, Road Construction Department, Govt. of Bihar effective from 06/05/2020.

*Handwritten signature*  
12/10/2020

*Handwritten signature*  
12/10/2020

*Handwritten signature*  
12.10.20  
E E Sharma

*Handwritten signature*  
12.10.20  
अधीक्षक अभियंता  
ग्रामीण कार्य विभाग  
कार्य संवत्, पूर्णिया

**BASIC RATES  
(B) Material**

| Sl. No. | Description                                                                                          | Unit | Basic Rate<br>as per SOR | Royalty | Final Rate<br>Including<br>Royalty |
|---------|------------------------------------------------------------------------------------------------------|------|--------------------------|---------|------------------------------------|
| M-028   | Bamboo (1st Class) 85 mm - 100 mm dia, 6 to 8 m long                                                 | No.  | 151.00                   |         | 151.00                             |
| M-029   | Bamboo (1st Class) 85 mm - 100 mm dia, 6 to 8 m long                                                 | No.  | 151.00                   |         | 151.00                             |
| M-030   | Bamboo (1st Class) 85 mm - 100 mm dia, 6 to 8 m long                                                 | No.  | 151.00                   |         | 151.00                             |
| M-031   | Bamboo (1st Class) 85 mm - 100 mm dia, 6 to 8 m long                                                 | No.  | 151.00                   |         | 151.00                             |
| M-032   | Bamboo (2nd Class) 75mm dia, 6 to 8 m long                                                           | No.  | 141.50                   |         | 141.50                             |
| M-033   | Bamboo (2nd Class) 75mm dia, 6 to 8 m long                                                           | No.  | 141.50                   |         | 141.50                             |
| M-049   | Brick Bats                                                                                           | cum  | 1063.00                  |         | 1063.00                            |
| M-052   | Royalty & Compensation for earth taken from private land                                             | cum  | 1.81                     | 33.00   | 34.81                              |
| M-159   | Empty Cement Bag                                                                                     | Nos. | 3.00                     |         | 3.00                               |
| M-159   | Sand bags (Cost of sand and Empty cement bag)                                                        | Nos. | 5.87                     | 2.59    | 8.46                               |
| M-159   | Sutli (Brown)                                                                                        | kg   | 34.20                    |         | 34.20                              |
| M-159   | Nails (150 mm Long)                                                                                  | kg   | 50.00                    |         | 50.00                              |
| M-086   | Granular material (Natural occurring, soil gravel mixture / quarry waste, kankar, laterite, dhandia) | cum  | 82.26                    | 83.00   | 165.26                             |
| M-112   | RCC Pipe NP3 (1000 mm dia)                                                                           | m    | 2675.47                  |         | 2675.47                            |
| M-114   | RCC Pipe NP3 (600 mm dia)                                                                            | m    | 768.53                   |         | 768.53                             |
| M-125   | Sand (Fine)                                                                                          | cum  | 66.85                    | 75.00   | 141.85                             |
| M-145   | Water                                                                                                | kl   | 40.00                    |         | 40.00                              |

*Amul*  
12/10/2020

*M. S.*  
12/10/2020

*Seish*  
12.10.20  
E E Dhamdani

*hmt*  
12.8.20  
अधीक्षक अभियंता  
ग्रामीण कार्य विभाग  
कार्य अंचल, प्रमोद

**BASIC RATES  
(C) USAGE RATES OF PLANT & MACHINERY**

| Sr. No. | sor Code | Description of                                       |                                    | Output of Machine |          | Usage Rates in Rs. |          |
|---------|----------|------------------------------------------------------|------------------------------------|-------------------|----------|--------------------|----------|
|         |          | Machine                                              | Activity                           | Unit              | Output   | Unit               | Rate     |
| PM-009  | P&M-012  | Crane upto 80 T                                      | Lifting of materials               |                   |          | per hour           | 1,289.00 |
| PM-010  | P&M-013  | Dozer D 80 - A12                                     | Dozing cutting                     | cum/h             | 260.00   | per hour           | 5,629.90 |
| PM-011  |          | Dozer D 50 - A13                                     |                                    | cum/h             | 120.00   |                    | 3,337.90 |
| PM-014  | P&M-017  | Front end-loader 1-cum bucket capacity @ 45 cum/hour | Loading Aggregates                 | cum/h             | 45.00    | per hour           | 1,403.00 |
| PM-017  | P&M-026  | Hydraulic Excavator of 1cum bucket                   | Excavation                         | cum/h             | 100.00   | per hour           | 1,969.20 |
| PM-031  | P&M-044  | Three wheel 80-100 kN Static Roller                  | Compaction/ Rolling                |                   |          |                    | 803.00   |
| PM-032  |          |                                                      | Earth- Embankment or sub-grade     | cum/h             | 80/70    |                    | 803.00   |
| PM-033  |          |                                                      | Sub-base G-I                       | cum/h             | 10.00    |                    | 803.00   |
| PM-034  |          |                                                      | Sub-base G-II/G-III                | cum/h             | 8.00     |                    | 803.00   |
| PM-035  |          |                                                      | WMM                                | cum/h             | 16.00    |                    | 803.00   |
| PM-036  |          |                                                      | BUSG                               | cum/h             | 10.00    | per hour           | 803.00   |
| PM-037  |          |                                                      | BM 50/75 mm                        | cum/h             | 12.00    |                    | 803.00   |
| PM-038  |          |                                                      | Premix 20 mm                       | sqm/h             | 250.00   |                    | 803.00   |
| PM-039  |          |                                                      | Seal Coat                          | sqm/h             | 500.00   |                    | 803.00   |
| PM-040  |          |                                                      | Surface Dressing 1st Coat          | sqm/h             | 400.00   |                    | 803.00   |
| PM-041  |          |                                                      | Surface Dressing 2nd Coat          | sqm/h             | 500.00   |                    | 803.00   |
| PM-042  | P&M-048  | Tipper 5.5 cum/10 t                                  | Carriage                           | cum/trip          | 5.50     | per hour           | 1,043.00 |
| PM-043  | P&M-053  | Tractor with Disc Harrows                            | Pulverisation of soil              | cum/h             | 80.00    | per hour           | 549.10   |
| PM-044  | P&M-055  | Tractor with ripper @ 60 cum per hour                | Ripping Pavements, uprooting trees | cum/h             | 60.00    | per hour           | 591.40   |
| PM-045  | P&M-053  | Tractor with trolley/with Grading equipment          | Transportation of materials        | t/trip            | 3 to 5   | per hour           | 549.10   |
| PM-046  | P&M-054  | Tractor with Rotavator                               | Scarifier                          | cum/h             | 25.00    | per hour           | 573.20   |
| PM-047  | P&M-057  | Truck 10 t capacity                                  | Carriage                           | cum/trip          | 5.50     | per hour           | 934.30   |
| PM-048  | P&M-059  | Vibratory roller 80-100 kN                           | Compaction of soil WMM             | cum/h             | 100.00   | per hour           | 2,069.00 |
| PM-049  |          |                                                      | Compaction of BM                   | cum/h             | 60.00    |                    | 2,069.00 |
| PM-050  | P&M-060  | Water tanker 6 kl capacity (Truck Mounted)           | Carriage of water                  | litre / h         | 12000.00 | per hour           | 184.00   |

12/10/2020

12-10-20

12-10-20  
अधीक्षक अभियंता  
ग्रामीण कार्य विभाग  
कार्य अंश, पूर्णिया

| Summary of Carriage Cost |                         |      |                |
|--------------------------|-------------------------|------|----------------|
| Sl. No.                  | Item                    | Unit | Amount<br>Rs.) |
| 1                        | Earth Work              | Cum  | 216.93         |
| 2                        | Brick Bats              | Cum  | 434.30         |
| 3                        | G.S.B.                  | Cum  | 2106.36        |
| 4                        | Local Sand              | Cum  | 274.35         |
| 5                        | HUME PIPE (1000 mm DIA) | Mtr. | 831.34         |
| 6                        | HUME PIPE (600 mm DIA)  | Mtr. | 336.65         |

12/2  
12/10/2020

12/10/2020

12-8-20  
अधीक्षण अभियंता  
ग्रामीण विकास विभाग  
कार्य अंचल, पूर्णियाँ

12-10-20

Comparison of carriage cost of material via Road from different sources for MMGSY only

| Sl No | Item                        | Unit | Source | Carriage Cost & Lead in Km                                                 |                                                            | Loading & Unload | Carriage by Road | Total  |
|-------|-----------------------------|------|--------|----------------------------------------------------------------------------|------------------------------------------------------------|------------------|------------------|--------|
|       |                             |      |        | Pucka / Surface                                                            | Katcha                                                     |                  |                  |        |
| 1     | Earth Work Via Road         | Cum  | Local  | $\frac{3.60}{2.04} \times 16.27 \times 0 \text{ Km} = \text{Rs } 0.00$     | $3.60 \times 25.42 \times 1 \text{ Km} = \text{Rs } 44.86$ | 172.07           | 216.93           | 216.93 |
| 2     | Brick Via Road              | Cum  | Local  | $\frac{3.60}{1.91} \times 16.27 \times 7 \text{ Km} = \text{Rs } 214.38$   | $3.60 \times 25.42 \times 1 \text{ Km} = \text{Rs } 47.85$ | 172.07           | 434.30           | 434.30 |
| 3     | Local Sand Via Road         | Cum  | Local  | $\frac{3.60}{2.04} \times 16.27 \times 2 \text{ Km} = \text{Rs } 57.42$    | $3.60 \times 25.42 \times 1 \text{ Km} = \text{Rs } 44.86$ | 172.07           | 274.35           | 274.35 |
| 4     | Hume Pipe (1000 mm) Via Rod | M    | purnea | $\frac{8.00}{10.00} \times 16.27 \times 53 \text{ Km} = \text{Rs } 689.85$ | $8.00 \times 25.42 \times 0 \text{ Km} = \text{Rs } 0.00$  | 141.49           | 831.34           | 831.34 |
| 5     | Hume Pipe (600 mm) Via Road | M    | purnea | $\frac{8.00}{25.00} \times 16.27 \times 53 \text{ Km} = \text{Rs } 275.94$ | $8.00 \times 25.42 \times 0 \text{ Km} = \text{Rs } 0.00$  | 60.71            | 336.65           | 336.65 |

Cost of Haulage Excluding Loading & Unloading as per SOR \* Subjected to Verification of Lead

20/10/2020

20/10/2020

20/10/2020

20/10/2020

अधीक्षक अभियंता  
ग्रामीण कार्य विभाग  
कार्य अंचल, पूर्णियाँ  
12.10.20

## निरीक्षण प्रतिवेदन

अधीक्षण अभियंता, ग्रामीण कार्य विभाग, कार्य अंचल पूर्णियाँ के पत्रांक 1661 दिनांक 31.08.2020 में दिये गये निर्देश के आलोक में दिनांक 18/3/21 से दिनांक 19/3/21 तक ग्रामीण कार्य विभाग, कार्य अंचल पूर्णियाँ अन्तर्गत ग्रामीण कार्य विभाग, कार्य प्रमंडल पूर्णियाँ, में कसबा, जलालगढ़, श्रीनगर के नगर एवं पूर्णियाँ पूर्व प्रखंड के वर्ष 2020 की बाढ़ से निम्नलिखित क्षतिग्रस्त पथों के Temporary Restoration कार्य के स्थल का निरीक्षण किया गया एवं इन कार्यों को प्राक्कलन के अनुरूप पाया गया। कार्य की वर्तमान स्थिति संतोषजनक है एवं पथ इस स्थलो पर मोटरेबल है।

| Sl. No | Block               | Road Name                                                  | Length<br>(In Km.) | T.A. Amount<br>(In Lakh) |
|--------|---------------------|------------------------------------------------------------|--------------------|--------------------------|
| 1      | 2                   | 3                                                          | 4                  | 5                        |
| 1      | Purnia East         | Diwanganj_PWD_Road -<br>Ranipatra_via Srinagar             | 7.480              | 1.667                    |
| 2      | Purnia East         | Jute Kendra to Lauwa Ghat                                  | 0.850              | 2.593                    |
| 3      | Kasba               | Kapsulbari to Dhar Tola Damdama                            | 2.000              | 35.468                   |
| 4      | Kasba               | Repair of road from N.H.-57<br>Garhbanaili to Jiyanganj    | 6.330              | 17.411                   |
| 5      | Krityanand<br>Nagar | Chethariyapir To Kathautiya                                | 4.200              | 7.927                    |
| 6      | Jalalgarh           | Khata Hat PMGSY Road - Sonapur<br>Paparpatti               | 1.950              | 24.232                   |
| 7      | Jalalgarh           | Jalalgarh (NH 57) - Bakania Village                        | 17.600             | 35.967                   |
| 8      | Kasba               | Phulbaria railway gumti to kajra                           | 8.220              | 16.236                   |
| 9      | Srinagar            | Jogaili - Teenmohani More                                  | 14.682             | 21.188                   |
| 10     | Purnia East         | Ranipatra PWD to Manjheli PWD<br>Road                      | 8.850              | 1.224                    |
| 11     | Krityanand<br>Nagar | Kamakhya Sthan To Muslimtola<br>M.V Majra                  | 3.960              | 22.588                   |
| 12     | Krityanand<br>Nagar | Mogla Chowk to Jaimogla Musahari                           | 2.105              | 2.968                    |
| 13     | Krityanand<br>Nagar | Badgachh Mahavir Sthan to Raitola                          | 3.095              | 50.601                   |
| 14     | Kasba               | Basantpur PMGSY Path To Harijan<br>Tola Basantpur Dogachhi | 1.878              | 23.616                   |
| 15     | Jalalgarh           | JALARGARH NH 57<br>MOTIYARPUR - DIMIHA                     | 7.050              | 8.086                    |

| Sl. No | Block            | Road Name                                                    | Length<br>(In Km.) | T.A. Amount<br>(In Lakh) |
|--------|------------------|--------------------------------------------------------------|--------------------|--------------------------|
| 1      | 2                | 3                                                            | 4                  | 5                        |
| 16     | Kasba            | Repair of road from kuldale to bishanpur jalkar via gargatta | 1.161              | 14.386                   |
| 17     | Kasba            | Repair of road from Kasba to Garua                           | 12.600             | 16.864                   |
| 18     | Kasba            | Dhankhanja on REO Rd to Jainganj                             | 2.500              | 7.145                    |
| 19     | Jalalgarh        | Katail - Bhateli (Khata Ghat)                                | 1.923              | 4.645                    |
| 20     | Kasba            | Jalkar PMGSY Path to Kharaiya                                | 2.085              | 30.145                   |
| 21     | Srinagar         | Co-Operative market, Srinagar to Makhnaha in Srinagar        | 3.000              | 25.701                   |
| 22     | Jalalgarh        | Jalalgarh NH-57 Railway Gumti to Matiyarpur                  | 6.500              | 6.552                    |
| 23     | Srinagar         | Kadgawan - Khutti Hasailii                                   | 4.900              | 6.081                    |
| 24     | Srinagar         | Dabariya Tola Bansar to Hammar Tola                          | 1.170              | 6.898                    |
| 25     | Purnia East      | Jiyagachi Chowk - Belwa                                      | 4.189              | 2.930                    |
| 26     | Kasba            | Dhankhanja Ghat Giyanganj PMGSY Road - Bathan Cock RCD Road  | 6.940              | 14.333                   |
| 27     | Krityanand Nagar | Musalman Tola To L031                                        | 0.700              | 8.237                    |
| 28     | Krityanand Nagar | Harizan Tola To T04                                          | 1.100              | 1.160                    |
| 29     | Purnia East      | Pipra Gourighat to Dagarua Sima                              | 1.640              | 2.379                    |
| 30     | Purnia East      | Middle School To sah tola                                    | 1.146              | 3.180                    |
| 31     | Jalalgarh        | Jalalgadh NH-57 to Bakeniya(bechgaun chowk to maraighat)     | 4.265              | 30.309                   |
| 32     | Jalalgarh        | L042 - Phatto Nema Pora to Dhataghat (VR42)                  | 0.742              | 7.934                    |
| 33     | Kasba            | KASBA GAYRUA ROAD To ZINDA PUR                               | 1.770              | 11.082                   |
| 34     | Krityanand Nagar | PMGSY Road Satkodariya To Devari Mohan Pur                   | 4.550              | 1.564                    |
| 35     | Jalalgarh        | Improvement of road from Bhateli on PMGSY road to Bishantha  | 2.200              | 7.023                    |

| Sl. No | Block       | Road Name                                           | Length<br>(In Km.) | T.A. Amount<br>(In Lakh) |
|--------|-------------|-----------------------------------------------------|--------------------|--------------------------|
| 1      | 2           | 3                                                   | 4                  | 5                        |
| 36     | Purnia East | Hari babu tola to Balramtola                        | 0.660              | 1.214                    |
| 37     | Kasba       | REO Path Mirja Bari to Lagan                        | 1.490              | 8.667                    |
| 38     | Purnia East | RD 87 To Dalia ghat                                 | 5.415              | 2.720                    |
| 39     | Purnia East | L061-FUTANI CHOWK TO<br>RIFUJI COLONY (VR61)        | 3.428              | 6.840                    |
| 40     | Purnia East | Dalia Ghat To Gordah Adiwasi Tola                   | 1.340              | 3.545                    |
| 41     | Kasba       | Repair of road from jalker to girda<br>via bochgaon | 4.200              | 19.131                   |
| 42     | Jalalgarh   | Ekamba PMGSY Road to Nishara                        | 2.500              | 11.513                   |

19/3/21

19/3/21

कनीय अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य प्रशाखा

सहायक अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य अवर प्रमंडल

कार्यपालक अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य प्रमंडल पूर्णियाँ

19/3/21

19.3.21

कार्यपालक अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य प्रमंडल मनहारी