


Estimate for motorability of road damaged by flood from Rashidpur REO Path to Gauri Meam for Year 2020


Head - MR 3054


Length : 1.343 KM

Sl No.	Item No.	Name of Item	unit	No	Length	Width	Height	Qty.	Rate	Amount
1		Providing and filling brick bats in ditches including cost of brick bats and labour all complete job as per specification and direction of E.I.	cum	As Per Appendix 1				107876 761.91	1887.78	2013744.12 14,23,065.00
										2013744.12 14,23,065.00
									Add 12% GST	241648.29 17,07,68.00
									Add 1% Labour Cess	20137.44 14,23,10.00
									Add Saignorage Fee	114608.41 20,99,10.00
									TOTAL (In Re.)	2390139.26

Say (In Re.) 2390139.00 16,89,055.00



8.1.21
Junior Engineer,
Rural Works Department,
Works Section, Khajauli


08/01/2021
Assistant Engineer,
Rural Works Department,
Works Sub Division, Khajauli


Executive Engineer,
Rural Works Department,
Works Division, Madhubani

सहायक अभियंता, राठ काठ सि, कार्य भग्न-पुनर्स्थापना-3 (मार्ग) का पत्रिका -
द्वारा अनुमानित दिनांक - 21.02.2021 के द्वारा समीक्षा कार्य प्रारंभ के
बाद पत्र -

Post-Facto T/A for Rs 16,89,055.00 (Rupee -
— sixteen lacs eighty nine thousand fifty five) only.


23.02.21
Superintending Engineer
RWD, Works Circle, Darbhanga
23/02/2021

Name of Road:- Rashidpur REO Path to Gauri Mearn

Scheme :- MMGSY(SC)

Length : 1.213

Block : Kharajuli


Appendix - 1

Measurement for restoration of Embankment & Shoulder with Brick Bat

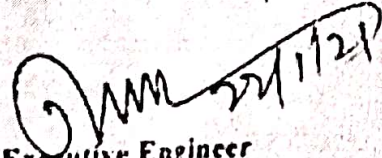
SL No.	Chainage (In m)	No.	Length (in m)	width (in m)	Thickness (in m)	Quantity (cum)
1	0-100	1.00	5.00	2.50	0.30 (av.)	3.75
2		1.00	10.00	2.50	0.45 (av.)	11.25
3	100-200	1.00	15.00	3.00	0.60 (av.)	22.00 18.75
4		1.00	25.00	2.00	0.30 (av.)	15.00
5		1.00	18.00	2.00	0.30 (av.)	10.80
6		1.00	2.00	2.00	0.45 (av.)	1.80
7		1.00	10.00	4.00	0.45 (av.)	18.00 13.35
8		1.00	3.00	2.00	0.30 (av.)	1.80
9		1.00	2.00	2.00	0.45 (av.)	1.80
10	200-300	1.00	2.50	2.00	0.30 (av.)	1.50
11		1.00	3.00	2.00	0.30 (av.)	1.80
12		1.00	5.00	3.00	0.60 (av.)	9.00 5.75
13	300-400	1.00	1.50	2.00	0.60 (av.)	1.80
14		1.00	3.00	2.00	0.30 (av.)	1.80
15		1.00	3.00	3.00	0.30 (av.)	2.70
16	400-500	1.00	4.00	3.00	0.30 (av.)	3.60
17		1.00	2.00	2.00	0.30 (av.)	1.20
18		1.00	4.00	3.50	0.60 (av.)	8.40
19		1.00	2.00	2.00	0.45 (av.)	1.80
20		1.00	3.00	2.00	0.45 (av.)	2.70
21		1.00	8.00	4.00	0.30 (av.)	24.00 16.50
22	500-600	1.00	9.00	4.00	0.30 (av.)	27.00 15.25
23		1.00	2.00	3.00	0.60 (av.)	3.60
24		1.00	4.00	3.00	0.45 (av.)	5.40
25		1.00	3.00	3.00	0.45 (av.)	4.05
26		1.00	5.00	2.00	0.45 (av.)	4.50

Sl. No.	Chainage (in m)	No.	Length (in m)	width (in m)	Thickness (in m)	Quantity (cum)
27	600-700	1.00	5.00	3.00	0.45 (av.)	6.75
28		1.00	4.00	3.00	0.45 (av.)	5.40
29		1.00	4.00	3.00	0.75 (av.)	9.00
30		1.00	3.00	3.00	0.75 (av.)	6.75
31		1.00	3.50	2.50	0.75 (av.)	6.56
32		1.00	3.40	2.60	0.45 (av.)	3.98
33		1.00	19.00	4.00	$\frac{0.25 + 0.75 + 0.35}{3}$ 0.45 (av.)	52.00 34.20
34	700-800	1.00	10.00	4.00	$\frac{0.55 + 0.90 + 0.45}{3}$ 0.60 (av.)	36.00 25.33
35	800-1000	1.00	10.00	4.00	$\frac{0.25 + 0.60 + 0.35}{3}$ 0.60 (av.)	24.00 16.00
36		1.00	5.00	4.00	0.60 (av.)	12.00
37		1.00	20.00	(4.5+7)/2	$\frac{1.25 + 3.50 + 1.40}{3}$ (4.5+7)/2	345.00 235.75
38		-2.00	6.50	3.14	1.2x1.2	-40.82
39		1.00	20 65.00	(3.0+4.2+4.6)/3	$\frac{0.75 + 4.6 + 0.85}{3}$ (0.75+4.6)/2	236.49 162.50
40	1000-1100	1.00	18.00	4.00	$\frac{1.25 + 2.00 + 0.90}{3}$ 2.00 (av.)	144.00 99.60
41		1.00	10.00	4.00	$\frac{0.25 + 0.75 + 0.40}{3}$ 0.45 (av.)	30.00 18.33
					TOTAL.	4078.16

761.91 M³


8.1.21.
Junoir Engineer
Rural Works Department,
Works Section, Khajauli


08/01/2021
Assistant Engineer,
Rural Works Department,
Works Sub Division, Khajauli


22/1/21
Executive Engineer
Rural Works Department,
Works Division, Madhubal