

कार्यपालक अभियंता का कार्यालय,
ग्रामीण कार्य विभाग, कार्य प्रमंडल मसौढ़ी।

पत्रांक....४१...६३०१..... मसौढ़ी.

दिनांक ..10.5.21..

प्रेषक,

कार्यपालक अभियंता

ग्रामीण कार्य विभाग,

कार्य प्रमंडल मसौढ़ी

सेवा में,

नोडल पदाधिकारी,

नई अनुरक्षण निति-2018(3054)

ग्रामीण कार्य विभाग, बिहार पटना।


विषय:- नई अनुरक्षण निति-2018 शीर्ष 3054 के अंतर्गत वितीय वर्ष 2021-22 में व्यय हेतु आवंटन की मांग।

महाशय,

उपर्युक्त विषय के संबध में नई अनुरक्षण निति-2018 शीर्ष 3054 के अंतर्गत वितीय वर्ष 2021-22 में व्यय हेतु संलग्न विवरणी के अनुसार रु0 1,76,82,857 (एक करोड़ छिहत्तर लाख बयासी हजार आठ सौ संत्तावन) रुपये का आवंटन उपलब्ध करने की कृपा की जाए ताकि किये गये कार्यों का भुगतान किया जा सके।

अनुलग्नक: विहित प्रपत्र में अधियाचना।

विश्वासभाजन


कार्यपालक अभियंता

ग्रामीण कार्य विभाग, कार्य प्रमंडल मसौढ़ी।

Requisition Formate for Scheme Head - MR (3054) under Bihar Rural Road Maintenance Policy-2018 (Initial Rectification and Surface Renewal)

Name of Works

Division : Masaurhi

Division : Masaurhi																						
Road Details				A A Details				Agreement Details														
SL no	Road Name	Batch No.	Project ID	Main Work Amount	Maintenance Amount	Emergency Amount	Total Amount	Total Length	AA Date	Main Work Amount	Maintenance	Date	Date Of Completion As per It no. 1145dt 24.03.2021(CEI RWD)	Ref.No.	Length	Value of IRI (in MM/Km)	Thickness of Bitumen Layer (in mm)	Value of Bitumen Content in Percentage	Previous Total Allotted Amount (In Lakh)	Upto Date expenditure as per MIS (In Lakh)	Requisition Against Work done (In Lakh)	Remarks
1	Construction of Special Repair of Masaurhi Pail road to Kazichak	RM/PA/MAS/1 9/0003	10100408080	27.08	10.35	0	37.43	1	24-Jun-19	20.915	8.3899	02-Nov-19	15.06.2021	14/SBD/ 19-2020	1	2328	25mm	5%	0	0	20.91500	Demand for Allotment will be Rs. 19.65687 due to work has been done in 790 meter rest 440 meter fresh pcc has been done by panchayat scheme
2	MORHARPUL - BIJAWAR (BR-26R-247)	RM/PA/MAS/1 9/0003	10100402041	37.32	11.3	0	48.62	1.23	24-Jun-19	26.78	10.749	02-Nov-19	15.06.2021	14/SBD/ 19-2020	1.23	3462.875	25mm	5%	0	0	19.65687	
3	MUSNAPAR MASAUDHI PATH - MAJHAULI (BR-26R-265)	RM/PA/MAS/1 9/0003	10100402043	46.76	17.37	0	64.13	1.79	24-Jun-19	38.297	16.467	02-Nov-19	15.06.2021	14/SBD/ 19-2020	1.79	2563.778	25mm	5%	0	0	38.29700	Demand for Allotment 400 Meter work has been done and 70 meter taken by Four lane Scheme.
4	MUSNAPAR MASAUDHI PATH - SEVDAHA (BR-26R-259)	RM/PA/MAS/1 9/0003	10100402047	16.02	4.02	0	20.04	0.47	24-Jun-19	10.154	3.5889	02-Nov-19	15.06.2021	14/SBD/ 19-2020	0.47	2267	25mm	5%	0	0	8.64170	
5	NADAWAN OTYARA - KASHINAGAR (BR-26R-248)	RM/PA/MAS/1 9/0003	10100402059	46.27	16.32	0	62.59	1.73	24-Jun-19	36.778	13.93	02-Nov-19	15.06.2021	14/SBD/ 19-2020	1.73	2430.889	25mm	5%	0	0	36.77800	
6	NADAWAN OTYARA ROAD - Sasaura (BR-26R-245)	RM/PA/MAS/1 9/0003	10100402061	27.73	9.13	0	36.86	0.88	24-Jun-19	20.824	7.2966	02-Nov-19	15.06.2021	14/SBD/ 19-2020	0.88	2428.222	25mm	5%	0	0	20.82400	
7	Spm Road to Bhargawan (BR2601)	RM/PA/MAS/1 9/0003	10100402134	40.09	15.45	0	55.54	1.5	24-Jun-19	31.716	13.358	02-Nov-19	15.06.2021	14/SBD/ 19-2020	1.5	2493.133	25mm	5%	0	0	31.71600	
				241.270	83.940	0	325.210	8.600		185.464	73.779				8.600	2472.866			0.000	0.000	176.82857	

1. Signed Hard Copy and Soft copy (in Excel) of recorded IRI is Enclosed
2. Up to Date Physical Progress has been Uploaded in MIS

EXECUTIVE ENGINEER
RURAL WORKS DEPARTMENT
WORKS DIVISION, MASAUHRI

10.05.21

NAME OF THE ROAD : NADWAN OIVARA ROAD TO SASAUNA

LENGTH OF THE ROAD : 0.880 KM

PACKAGE NO. : MR-N/19-20/MASAURHI/01

DIVISION : MASAURHI

BLOCK : DHANARUA

AGENCY : PATILPUTRA INFRA CONSTRUCTION PVT LTD

Date	Time	Section	Length in km	Bumps in mm	Speed Rate	OR mm/km	UIV mm/km	CATEGORY ROAD	IRI	Latitude	Longitude	Event			
8/5/21	10:16:27	93	0.1	240	0	2400	2524	G	3.45	25.422955	85.12175	Normal	$Y = 0 * X^2 + 0.936 * X + 278.4$		
8/5/21	10:17:0	93	0.1	230	30.3	2300	2431	G	3.34	25.422757	85.120707	Normal	$X = 1875$		
8/5/21	10:17:20	93	0.1	230	20.2	2300	2431	G	3.34	25.422385	85.119998	Curve	$Y = 2033$		
8/5/21	10:17:48	93	0.1	230	10.1	2300	2431	G	3.34	25.422327	85.119023	Speed Breaker			
8/5/21	10:18:38	93	0.1	200	30.3	2000	2150	G	2.99	25.422118	85.118097	Normal	(R) RURAL ROAD		
8/5/21	10:19:13	93	0.1	250	20.2	2500	2618	G	3.56	25.42204	85.117272	Curve	Good	Average	Poor
8/5/21	10:19:33	93	0.1	240	30.3	2400	2524	G	3.45	25.421135	85.117322	Normal	<4000	4001-5000	>5001
8/5/21	10:19:49	93	0.1	260	20.2	2600	2712	G	3.68	25.420257	85.117508	Culvert			
8/5/21	10:20:10	93	0.08	150	30.3	1875	2033	G	2.84	25.41962	85.117172	Normal			
TOTAL			0.88	2030	191.9	20675	21854		29.99	228.79559	766.068849				
AVERAGE						2297.222	2428.222		3.332222						

Per road
8/5/21

Assistant Engineer
R.W.D. Sub-Division, Dhanarua

APF
8/5/21

Executive Engineer
R.W.D. Works Div. Masaurhi

Steco Analyzer

Name of Customer : PATLIPUTRA INFRA CONST F
Name of Work/ Road : NADAWAN OIYARA RD TO S
Lab Job number :
Date : 08-05-2021
Section No. : 93


Test Date :	08-05-2021	Road Name :	AN OIYARA RD TO SASAUNA		
Machine No :		Road Type :	(R) RURAL ROAD		
Start S No :		Side :		Interval	
Start E No :					
Weather :		UIV Range :	1033	To	4000 1000 mm/km
Start Location :		Dist Range :	0	To	1 0.1 * 1000 m
End Location :		Equation :			

Print

Generate Report and Graph

Redraw Graph

Map View

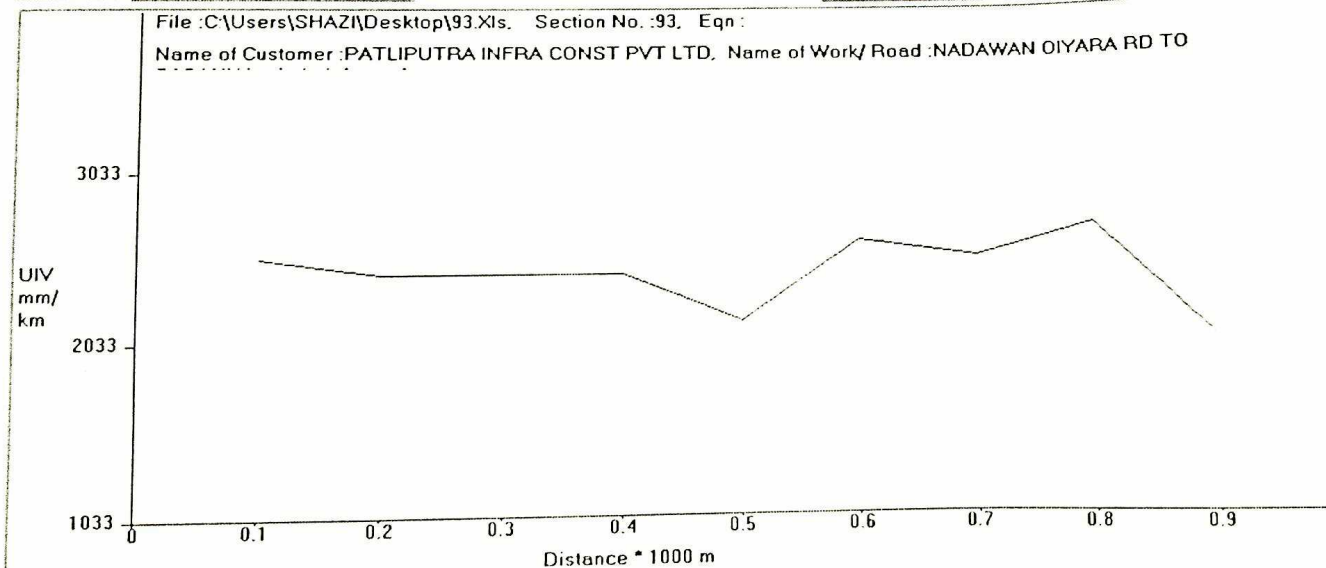

APJ
8/5
Executive Engineer
R.W.D. Works Div. Masaurhi