


9

✓

# RURAL WORKS DEPARTMENT

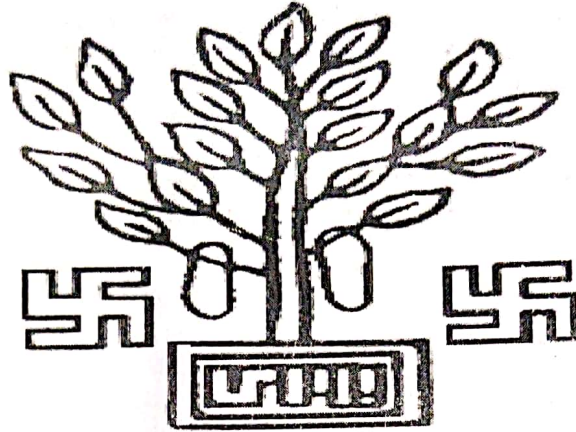

## GOVERNMENT OF BIHAR

NAME OF ROAD:- CHHABU RISHIDEV HOUSE TO BHGWAT  
CHOUDHARI RISHIDEV HOUSE

DIVISION:- R.W.D, WORKS DIVISION, FORBESGANJ

CIRCLE:- R.W.D, WORK CIRCLE, KISHANGANJ

BLOCK:- RANIGANJ

### ESTIMATED COST

678196.00  
4285464.00

प्रतिवेदन

पथ का नाम :- दण्डू प्रजिदेव हाउस से भागावत चौचरी प्रजिदेव टोला।

कार्य का नाम :- FDR/2020

में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।

संलग्न प्राक्कलन 10.06.2020 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त .....2020.....

..... में बाढ़ क्षतिग्रस्त मरम्मति मद से यातायात चालू करने हेतु तैयार किया गया है

जिसकी प्राक्कलित लागत .....1285464/- — 678196.00..... है।

उक्त पथ का निर्माण .....FDR..... योनान्तर्गत हुआ है एवं योजना अनुरक्षण


अवधि में 2020..... पथ के कटे (क्षतिग्रस्त)

भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद


यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट

रूप से प्राक्कलन में दर्शाया गया है।

प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।



कनीय अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य प्रशाखा, रानी.डी.जी



सहायक अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य अवर प्रमण्डल, रानी.डी.जी



कार्यपालक अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य प्रमण्डल, फ़ार्विस.डी.जी

# Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads  
Damaged during flood in 2020 in ARARIA District

Name of Road:

CHHABU RISHIDEV HOUSE TO BHGWAT CHOUDHARI RISHIDEV HOUSE

Block: RANIGANJ

District: ARARIA

Division : RWD, Works Division, FORBESGANJ

Circle: RWD, Work Circle, KISHANGANJ

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
			450.00		282496.5
		Cum	200.00	627.77	439439.00
2	Labour for cutting 62mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-Charge.				
			525.00		39826.5
		Mtr.	250.00	75.86	56895.00
3	Labour for fitting & fixing 62mm to 75mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-Charge.				
			180.00		7210.80
		Mtr.	230.00	40.06	13219.80
4	Supplying of EC bag, filling of local sand, stitching and placing in position as per the direction of Engineer-in-charge.				
			5247		196348.95
		Per Bags	6209.85	37.35	250612.90
5	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				
			21.00		39279.03
		Cum	185.63	1870.43	347198.57
6	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.				
		meter	7.50	5382.71	40370.33
TOTAL AMOUNT =					1147735.59
ADD 12.00 %GST=					137728.27
SAY TOTAL AMOUNT =					1285463.86

1285464.00

678196.00

JE

AE

EE

RWD SUB DIVISION-RANIGANJ

RWD SUB DIV.  
RANIGANJ

RWD WORKS DIV. FORBESGANJ

Technically Approved for Rs 1,285,464/- (Rupees Twelve Lacs  
Seventy Eight thousand four hundred Sixty four only.  
One Ninty Six X

SE  
KISHANGANJ

Superintending Engineer  
Rural Works Department  
Works Circle, Kishanganj