



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar


BIHAR RURAL ROADS PROJECT

Bihar Rural Road Development Agency (BRRDA)

Govt. of Bihar



EMERGENT REPAIR OF ROAD FROM NH-82 To NH-31 Via GOSAI GAON (PKG-26P2-08) UNDER FDR

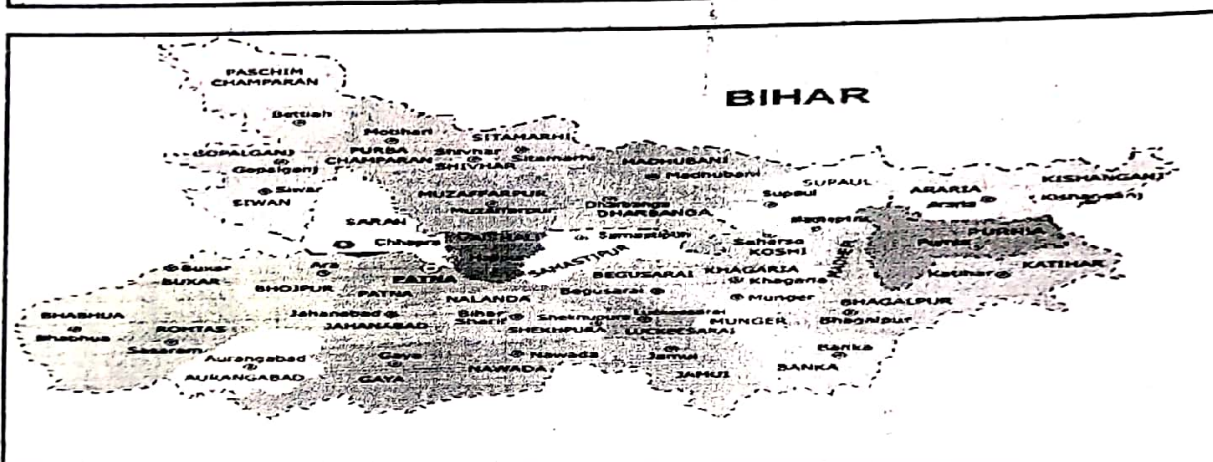

Name of the Road :-

EMERGENT REPAIR OF ROAD FROM NH-82 To NH-31 Via GOSAI GAON (PKG-26P2-08) UNDER FDR

DISTRICT	:	Patna	
DIVISION	:	BARH	
BLOCK	:	GHOSWARI	
Total Length of Road	:		
Total Damaged Length Of Road	:	992	M
TOTAL COST OF CONSTRUCTION	:	30.654	Lacs
TOTAL COST OF PROJECT	:	30.654	Lacs

Executive Engineer
Rural Works Division,
BARH

प्रतिवेदन

कार्य का नाम :- एन0एच0-82 से एन0एच0-31 भाया गोसाईं गाँव
पथ की आपातकालीन मरम्मत।

क्षतिग्रस्त पथांश की लम्बाई :- 992 मीटर

प्राक्कलित राशि :- मो0 30.65400 लाख

मद :- एफ0डी0आर0

प्रस्तुत प्राक्कलन, घोसवरी प्रखण्ड अंतर्गत एन0एच0-82 से एन0एच0-31 भाया गोसाईं गाँव पथ की आपातकालीन मरम्मत का वर्तमान अनुसूचित दर पर मो0 30.654 लाख (तीस लाख पैसठ हजार चार सौ) रूपये मात्र का तैयार किया गया है। इस वर्ष की अतिवृष्टि एवं बाढ़ से पथ काफी क्षतिग्रस्त हो गया है। पथ पर पानी लगा हुआ है। आवागमन बाधित है। विभागीय निर्देशानुसार पथ को यातायात योग्य बनाना है, तदनुसार पथ के क्षतिग्रस्त पथांश में जी0एस0बी0-I मरकर यातायात योग्य बनाया गया। यह पथ ^{PM 657 II} 3054 (नई अनुसूचन नीति 2018) अन्तर्गत निर्माणाधीन है। अतः जनहित एवं कार्यहित में प्राक्कलन की स्वीकृति अति आवश्यक है।

B. Kumar
30/10/20

कनीय अभियंता,
घोसवरी

Local
30/10/20

सहायक अभियंता
घोसवरी

30/11/20

कार्यपालक अभियंता,
ग्रामीण/कार्य विभाग,
कार्य प्रमण्डल, बाढ़

SUMMARY OF COST ESTIMATE FOR THE PROJECT

0: EMERGENT REPAIR OF ROAD FROM NH-82 To NH-31
Via GOSAI GAON (PKG-26P2-08) UNDER FDR

PATNA
GHOSWARI
BARH

DESCRIPTION	AMOUNT (LAKHS)
OF GSB	2618482.44
TOTAL COST IN LACS =	26.185
GST @ 12 % ON (PART A)	3.142
LABOUR CESS GST @ 1 % ON (PART A)	0.262
SUB TOTAL WITH GST & Labour cess	29.590 29.589
CNC @ 1 %	0.262 0.296
SEIIGINORANCE @10%	0.769
TOTAL	30.621 30.654
TOTAL COST OF PROJECT IN LACS =	30.621 30.654

BKumar
30/10/20
JE
RWD

Sanad
30/10/20
AE
RWD

28/11/20
EE
RWD

Technically approved for Rs. 30.621 Rupees (Thirty only)
including five year Maintenance Cost

30/10/20
Superintending Engineer
R.W.D. WORKS CIRCLE, PATNA

तकनीकी सलाहकार Superintending Engineer
ग्रामीण कार्य विभाग R.W.D. WORKS CIRCLE, P
कार्य अंचल, पटना

RURAL WORKS DEPARTMENT

(Govt. of Bihar)

**EMERGENT REPAIR OF ROAD FROM NH-82 To NH-31 Via GOSAI GAON (PKG-26P2-08)
UNDER FDR**

NAME OF ROAD :

BLOCK

GHOSWARI

DIV(RWD)-BARH

DISTRICT

PATNA

CIRCLE(RWD)-PATNA

Sl. No.	SDB SL. NO.	MORD Ref. No.	Item Description	Unit	Length	Width	Height	Quantity	Rate	Amount (in Rs.)
1			Construction of granular sub-base by providing well graded material, spreading in uniform layers with tractor mounted grader arrangement on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401. QTY VIDE POT MEASUREMENT	Cum				1527.28	1714.48	2618482.442 2618491

TOTAL= 2618482.442

2618491

=26.125

B. K. Sharma
30/10/20

JE(RWD)

Sanjay
30/10/20

A E (RWD)

28/11/20

E E (RWD)
WORK DIVISION
BARH

Inspection Report for Flood Damage Work

Date: 26.12.2020

1. Name of PIU:- EE/R.W.D. Bakh.

2. Name of Block/Road:- Chheswari / NH82 to NH31 via Chasigaon.

3. For Road:-

4. Damage Location/Chainage:- 0.350 km to 0.500 km, 0.900 km to 1.100 km, 1.500 km to 2.100 km, 2.400 km to 2.600 km.

5. Damage Length:- 0.992 km.

6. Nature of Damage:- Wash out, on four different chainages due to heavy rainfall.

I. Material being used in Restoration Works:- G.S.B. Grading - I,

II. Equipments/Tools being used in Restoration Works:- Tractor, Truck, JCB, Roller

III. Procedure taken up in Restoration Works:- Carriage of G.S.B. materials, laying, spreading & compacting by Roller.

IV. Restored Length:- 0.992 km.

B. For Bridge

1. Damage Location/Chainage:-

2. Damage Length:-

3. Nature of Damage:-

4. Details of Restoration Works:-


I. Material being used in Restoration Works:-

II. Equipments/Tools being used in Restoration Works:-

III. Procedure taken up in Restoration Works:-

IV. Restored Length

N.A.


26.12.2020
Name of Inspector
Executive Engineer
R.W.D, Works Division ~~Bar~~ Danapur.