

कार्यपालक अभियंता का कार्यालय,
ग्रामीण कार्य विभाग, कार्य प्रमंडल, रक्सौल।

पत्रांक 535अनु०

रक्सौल, / दिनांक 17/5/2021

प्रेषक :-

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, रक्सौल।

सेवा में,

अपर मुख्य कार्यपालक पदाधिकारी-सह-सचिव,
बिहार ग्रामीण पथ विकास एजेन्सी,
ग्रामीण कार्य विभाग, बिहार, पटना।

विषय :- शीर्ष-3054 अन्तर्गत बिहार ग्रामीण पथ अनुक्षण नीति-2018 के तहत आवंटन उपलब्ध कराने के संबंध में।

महाशय,

उपर्युक्त विषयक गैर योजना शीर्ष-3054 अन्तर्गत बिहार ग्रामीण पथ अनुक्षण नीति-2018 संलग्न सूची के अनुसार आवंटन अधियाचना विहित प्रपत्र में भरकर आवश्यक कार्रवाई हेतु समर्पित किया जाता है।

विश्वासभाजन,

अनुलग्नक :- संलग्न सूची


1. पथों का आवंटन अधियाचना प्रपत्र।

17.5.21
कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, रक्सौल।

Requisition of Allotment under Head MR HEAD-3054 Under Bihar Road Maintenance Policy-2018 (Initial Rectification and Surface Renewal)


Division -> Patna

Sl. No.	Package No.	Name of Road	Contractor Name	Project ID as Per MIS	Administrative Approval (AA) Letter No. & Date	A.A.		Agreement Value		Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of IRI (in mm/Km)	Thickness of Bitume n Layer (in mm)	Value of Bitume n Content in Percent	Previous Total Allowed Amount	up-to-date Expendit ure as per MIS (in Lakh)	Requisition against work done. (in Lakh)	Remarks
						Length (in Km)	Total (Amount (in Lakh)	Initial Rectification with Surface Renewal (in Lakh)	5 Yrs Routine Maintenance (in Lakh)										
1	MR-N/16-20/Paramb18	Dabheri Road - anacholia (BR-11R-442)	M/S Umar Bihar Construction Co	31708202074	3054-04-117-2019, 5128/चकल, दिनांक-30.10.2019	2.190	89.93510	59.754	23.2613	173NMBD/2020-21	07-08-2021	-	2706	25mm	5	0	0	59.75400	Work in Progress
2	MR-N/16-20/Paramb18	NH-28 Patna - Badfryah Ghat (Part 2)	M/S Umar Bihar Construction Co	NEA21000316	3054-04-117-2019, 5071/चकल, दिनांक-30.10.2019	5.000	192.47040	133.682	50.9269	173NMBD/2020-21	07-08-2021	-	2300	25mm	5	0	0	133.68200	Work in Progress
3	MR-N/16-20/Paramb18	NH-28 Gambharia Chowk to Akshaya Tola Via Baria Tola Gambharia	Rehan Construction Pvt. Ltd.	317851032954	3054-04-117-2019, 5128/चकल, दिनांक-24.09.2019	3.513	127.89990	86.584	31.3607	174NMBD/2020-21	07-05-2021	-	2831	25mm	5	0	0	86.58400	Work in Progress
4	MR-N/16-20/Paramb18	New Bypass to Simanola Via Ekadara	M/S Ganpat Construction	317851031985	3054-04-117-2019, 5128/चकल, दिनांक-24.09.2019	2.300	84.61960	54.517	23.8896	184NMBD/2020-21	17-06-2021	-	2765	25mm	5	0	0	84.61960	Work in Progress
5	MR-N/16-20/Paramb18	PWD Road at Barua to Mughl	M/S Asrar Construction	317851032000	3054-04-117-2019, 5073/चकल, दिनांक-30.10.2019	2.580	109.59370	76.647	26.8961	169NMBD/2020-21	05-08-2021	-	2532	25mm	5	0	0	76.64700	Work in Progress
6	MR-N/16-20/Paramb18	Bahura PIGSY Road to Bajrang Chowk tak in Rataul Block	Paramba Construction Private Limited	31708508010	3054-04-117-2019, 5128/चकल, दिनांक-24.09.2019	2.550	92.21710	56.763	25.6413	186NMBD/2020-21	16-09-2021	-	2162	25mm	5	0	0	56.76300	Work in Progress
7	MR-N/16-20/Paramb18	Palana thana to Dabheri toll bore hue Bahura PIGSY Road tak in Rataul Block	Paramba Construction Private Limited	31708508009	3054-04-117-2019, 5128/चकल, दिनांक-24.09.2019	1.570	55.95390	34.418	15.7001	186NMBD/2020-21	16-09-2021	-	2317	25mm	5	0	0	34.41800	Work in Progress
																		532.46760	


 Executive Engineer,
 Rural Works Department,
 Works Division, Patna

Name of Customer: Ruban Construction
 Name of Work: Saiva Sankar Road
 Lab Job number: 16-05-2021
 Date: 16-05-2021
 Section No: 12

Test Date:	16-05-2021	Road Name:	Saiva Sankar Road
Machine No:	328	Road Type:	(T) RURAL ROAD
Start S No:		Side:	
Start E No:		Interval:	
Weather:	Normal	UV Range:	1105 To 5000
Start Location:	26.918508	Dist Range:	0 To 36
End Location:	26.918508	Equation:	$Y = 0.0000 \cdot X^2 + 0.9980 \cdot X + 1095$

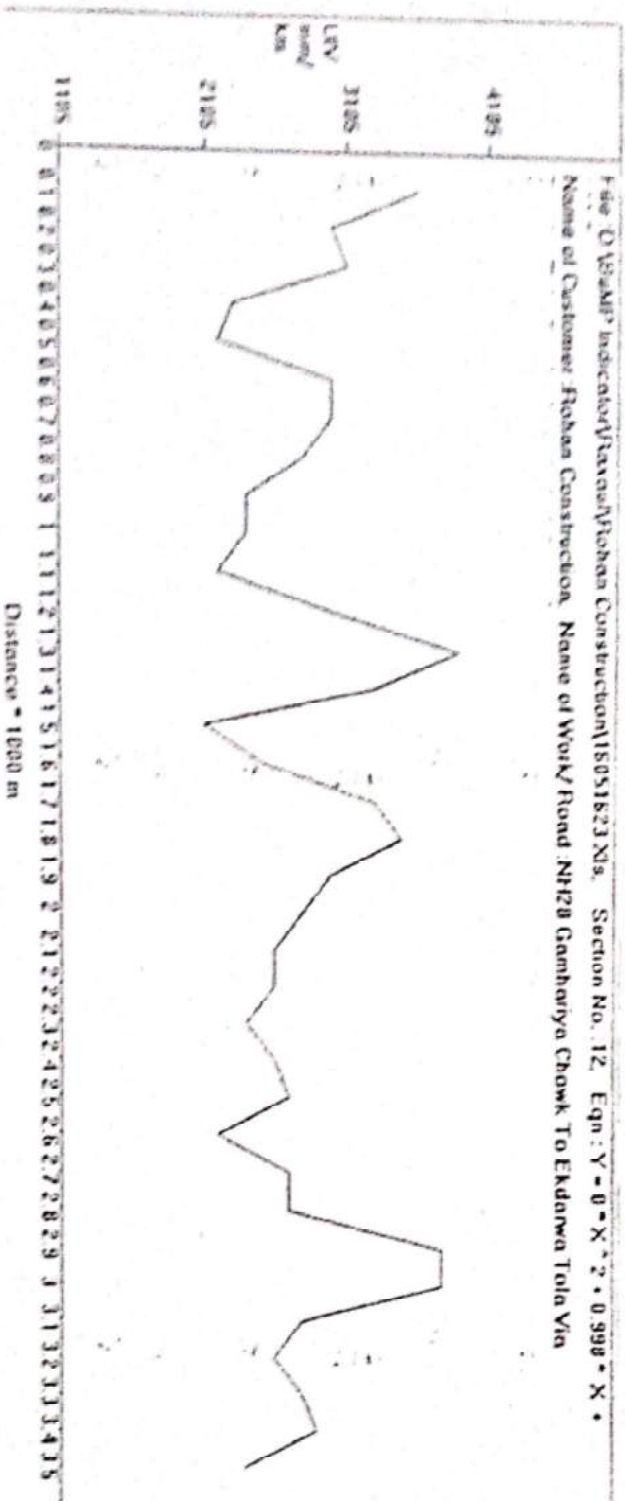

16-05-2021
 12

16-05-2021
 12

16-05-2021
 12

Road Name-NH28 Gamhariya Chowk To Ekdarwa Tola Via Baraka Tola Gamhariya, Contractor-Rohan Construction Pvt. Ltd.

Date	Time	Section	Length	Bumps	Speed	OR	IRI in	CATEGO	Latitude	Longitu	Event
No.			in km	in mm	Rate	mm/km	ROAD	RY		de	
16/5/21	13:51:15	12	0.1	350	0	3500	3602 G		26.93451	84.83591	Normal
16/5/21	13:51:15	12	0.1	290	20.2	2900	3003 G		26.93427	84.83495	Normal
16/5/21	13:52:0	12	0.1	300	20.2	3000	3103 G		26.93411	84.83401	Normal
16/5/21	13:52:25	12	0.1	220	30.3	2200	2305 G		26.93379	84.83318	Normal
16/5/21	13:52:25	12	0.1	210	20.2	2100	2205 G		26.93346	84.83237	Normal
16/5/21	13:52:25	12	0.1	290	30.3	2900	3003 G		26.93287	84.83158	Normal
16/5/21	13:53:0	12	0.1	290	20.2	2900	3003 G		26.93252	84.83067	Normal
16/5/21	13:53:0	12	0.1	270	30.3	2700	2804 G		26.93251	84.82965	Normal
16/5/21	13:53:0	12	0.1	230	20.2	2300	2404 G		26.93234	84.82875	Normal
16/5/21	13:53:0	12	0.1	230	20.2	2300	2404 G		26.93272	84.82785	Curve
16/5/21	13:53:35	12	0.1	210	20.2	2100	2205 G		26.93223	84.82719	Curve
16/5/21	13:54:11	12	0.1	290	20.2	2900	3003 G		26.93223	84.8262	Normal
16/5/21	13:54:11	12	0.1	380	30.3	3800	3901 G		26.93182	84.82534	Normal
16/5/21	13:54:46	12	0.1	320	20.2	3200	3303 G		26.93146	84.82468	Normal
16/5/21	13:55:0	12	0.1	200	30.3	2000	2105 G		26.93145	84.82362	Normal
16/5/21	13:55:0	12	0.1	240	30.3	2400	2504 G		26.93135	84.82263	Normal
16/5/21	13:56:0	12	0.1	320	30.3	3200	3303 G		26.9313	84.82091	Normal
16/5/21	13:56:32	12	0.1	290	20.2	2900	3003 G		26.93122	84.82002	Normal
16/5/21	13:56:32	12	0.1	270	20.2	2700	2804 G		26.9312	84.81901	Normal
16/5/21	13:57:0	12	0.1	250	30.3	2500	2604 G		26.93057	84.81753	Normal
16/5/21	13:57:7	12	0.1	250	20.2	2500	2604 G		26.93007	84.81689	Normal
16/5/21	13:57:7	12	0.1	230	20.2	2300	2404 G		26.92951	84.81643	Normal
16/5/21	13:57:42	12	0.1	250	20.2	2500	2604 G		26.92869	84.81621	Normal
16/5/21	13:57:42	12	0.1	260	20.2	2600	2704 G		26.92822	84.81544	Normal
16/5/21	13:58:0	12	0.1	210	20.2	2100	2205 G		26.92846	84.81446	Normal
16/5/21	13:58:18	12	0.1	260	20.2	2600	2704 G		26.92896	84.8137	Normal
16/5/21	13:58:18	12	0.1	260	20.2	2600	2704 G		26.92958	84.81301	Normal
16/5/21	13:58:18	12	0.1	370	20.2	3700	3802 G		26.92978	84.8121	Normal
16/5/21	13:59:0	12	0.1	370	20.2	3700	3802 G		26.93062	84.81192	Normal
16/5/21	13:59:28	12	0.1	270	20.2	2700	2804 G		26.93111	84.81116	Normal

$$Y = 0 * X^2 + 0.998 * X + 109.5$$

$$X = 2289$$

$$Y = 2393$$

(R) RURAL ROAD

Good Average Poor
<4000 4001-5000 >5001

16/5/21 13:59:28
16/5/21 14:0:4
16/5/21 14:0:4
16/5/21 14:0:39

12
12
12
12
0.083

250
270
280
190

20.2
20.2
20.2
10.1

Total IRI 99.14
Average IRI 2811.829

2500 2604 G
2700 2804 G
2800 2901 G
2289 2191 G

26.93158 84.81014 Normal
26.93161 84.80936 Normal
26.93144 84.80838 Normal
26.93149 84.80749 Normal

16/5/21

AI

18/11/2021

EXECUTIVE ENGINEER
RURAL WORKS DEPARTMENT
WORKS DIVISION, RAHAUL
16/5/21