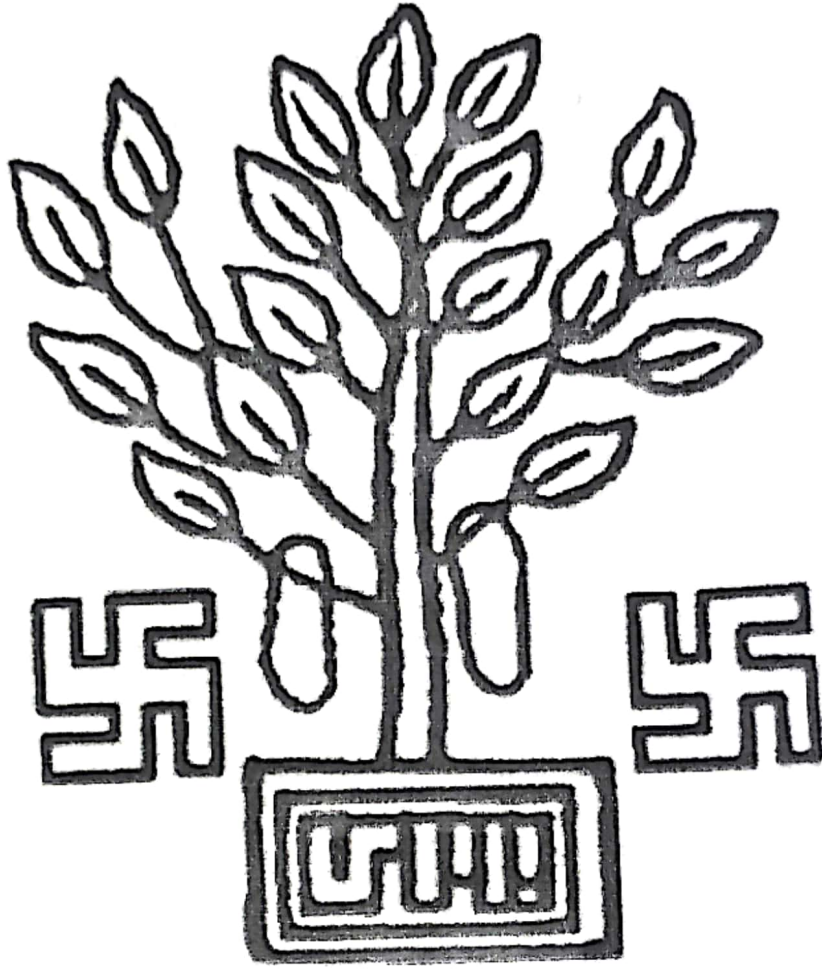


GOVERNMENT OF BIHAR
FDR (2020-21)



बिहार सरकार

Name of Road:- Dhaka karsahiya se Mushari Tola Hote Raksha Shyambakhari Path Tak	Length- 3.780Km
Estimated Cost- Rs.:- 1,55,200.00	Block- Dhaka

Submitted By
Executive Engineer
R.W.D. (W) Division Dhaka

F.D.R (2020-21)

तकनीकी प्रतिवेदन

पथ का नाम :- दाका-करखिपै/से मुशहरी रोला कोने हुए एक्का श्यामनखरी तक
प्रमंड का नाम :- दाका
पथ की लम्बाई :- 3.780 कि.मी.
तीर्थ :- 3054.
प्राक्कलित राशि :- ₹. 1,55,200.00
अनुरक्षण अवधि :- - - -

प्रस्तुत प्राक्कलन दाका-करखिपै/से मुशहरी रोला कोने हुए एक्का श्यामनखरी तक में अतिवृष्टि/बाढ़ से क्षतिग्रस्त पथाशों में यातायात पुनर्स्थापन हेतु तैयार किया गया है जिसकी प्राक्कलित राशि मो. 1,55,200.00 रु० है। प्रस्तुत प्राक्कलन सचिव ग्रामीण कार्य विभाग बिहार पटना के पत्रांक:-2254, दिनांक:-30.06.2020 के निर्देशानुसार तैयार किया गया है। पथ में अतिवृष्टि/बाढ़ के कारण क्षतिग्रस्त पथाशों में Brick Bats से भरने का प्रावधान किया गया है।
प्राक्कलन में दिये गये दर वर्तमान अनुसूचित दर के अनुरूप है।

कनीय अभियंता

ग्रामीण कार्य विभाग
कार्य प्रशाखा, दाका।

सहाय अभियंता

ग्रामीण कार्य विभाग
कार्य अवर प्रमंडल, दाका


कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, दाका


Rate for Restoration work of Road from Dhaka karsahiya se Mushari Tola Hote
Shyambakhari Path Tak for the year 2020-21 in Dhaka Block.

Length:- 3.780 Km

Name of Item	Unit	Quantity M ³	Rate Rs.	Amount Rs.
Labour for laying dry graded jhama khoa or stone filter under Bricks pitching in slope or apron including light ramming etc..... all complete as per approved design specification and direction of E/I. (Brick Bat)				
CH:- 1850M to 1857M (Approach Road of R.C.C Slab Culvert)				
2x3.80x1.50+2.50/2x0.600+1.20+1.50/3 =		16.72M ³		
2x2.50x1.25+1.50/2x1.0+1.30+1.0/3 =		7.56M ³		
CH:- 3100M to 3140M				
40.00x4.00x0.300 =		48.00M ³		
Total =	M ³	72.28	2147.40	1,55,214.00
		Total	Rs.	1,55,214.00
			Say Rs.	1,55,200.00


1.9.2020
J.E.



07/09/2020
A.E.


07/09/2020
E.E.

Post Facto T.A./TS is accorded for Rs. 1,55,200.00

(.....crore.....One.....lacs.....Fifty Five.....Thousand.....)

.....Two.....hundred.....)


S.E. (R.W.D.)
works Circle
Motihari

29-12-20

Inspection Report for Flood Damage Works:-

Date:-

1. Name of PIUs:- Executive Engineer. R.W.D. (W) Div.ⁿ Dhaka
2. Name of Block:- Dhaka
3. Name of Road :- Dhaka Karsahiya Se Mushari Tola bote Hue
Raksha Shyambakhari Path Tak.

(A) For Road

1. Damage Location Chainage:-
2. Damage Length:- 47 M
3. Name of Damage:- Road damaged due to Flood.
4. Details of Restoration Work:-
 - (i) Material being used in Restoration works:- Brick bats.
 - (ii) Equipments Tools being used in restoration works:-
 - (iii) Procedure take up in restoration works:- Departmental.
 - (iv) Restored Length:- 47 M.


Executive Engineer
R.W.D. (W) Div.ⁿ
Raxaul