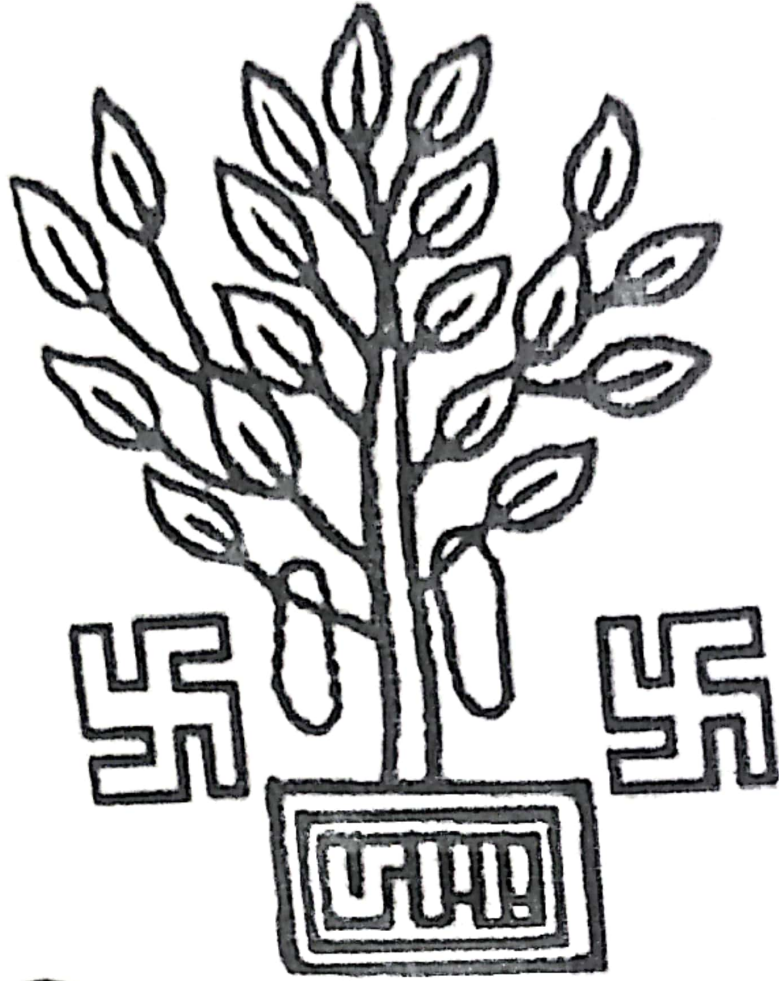


GOVERNMENT OF BIHAR
FDR (2020-21)



बिहार सरकार

Name of Road-	Bhandar 22Mile to Madhya Vidyalaya Saphi	Length- 4.20Km
Estimated Cost- Rs.:-	1,44,800.00	Block- Dhaka

Submitted By
Executive Engineer
R.W.D. (W) Division Dhaka

F.D.R (2020-21)

तकनीकी प्रतिवेदन

पथ का नाम :- मंजूर 22-मॉडल से मज्ज निधान स्तूपही.

प्रखंड का नाम :- दाका

पथ की लम्बाई :- 4.10 कि०मी०


शीर्ष :- F.D.R

प्राक्कलित राशि :- ₹- 1,44,800.00

अनुरक्षण अवधि :- 30-06-2020

प्रस्तुत प्राक्कलन मंजूर 22-मॉडल से मज्ज निधान स्तूपही में अतिवृष्टि/वाढ़ से क्षतिग्रस्त पथाशों में यातायात पुर्नस्थापन हेतु तैयार किया गया है जिसकी प्राक्कलित राशि मो० 1,44,800.00.00.00 रु० है। प्रस्तुत प्राक्कलन सचिव ग्रामीण कार्य विभाग बिहार पटना के पत्रांक:-2254, दिनांक:-30.06.2020 के निर्देशानुसार तैयार किया गया है। पथ में अतिवृष्टि/वाढ़ के कारण क्षतिग्रस्त पथाशों में Brick Bats से भरने का प्रावधान किया गया है।


प्राक्कलन में दिये गये दर वर्तमान अनुसूचित दर के अनुरूप है।


1.9.2020

कनीय अभियंता

ग्रामीण कार्य विभाग


कार्य प्रशाखा, दाका।


31/09/2020

सहाय अभियंता

ग्रामीण कार्य विभाग

कार्य अवर प्रमंडल, दाका


07/09/2020

कार्यपालक अभियंता

ग्रामीण कार्य विभाग

कार्य प्रमंडल, दाका

Rate for Restoration work of Road from Bhandar 22Mile to Madhya Vidyalaya
for the year 2020-21 in Dhaka Block.
Length:- 4.20 Km

Name of Item	Unit	Quantity M ³	Rate Rs.	Amount Rs.
labour for laying dry graded jhama khoa or stone filter under Bricks pitching in slope or apron including light ramming etc..... all complete as per approved design specification and direction of E/I. (Brick Bat)				
CH:- 05M to 10M (Approach Road of R.C.C Slab Culvert)				
2.00x5.00x1.00x1.10+1.50/2 = 13.00M ³				
CH:- 800M to 845M = 15.00M ³				
5.00x5.00x0.600 = 5.00M ³				
4.00x1.00x1.0+1.50/2				
CH:- 1100M to 1120M = 37.50M ³				
20.00x1.50x1.0+1.50/2				
Total = 70.50M ³	M ³	70.50	2053.84	1,44,795.00
		Total	Rs.	1,44,795.00
			Say Rs.	1,44,800.00

[Signature]
1.9.2020
I.E.

[Signature]
07/09/2020
A.E.

[Signature]
07/09/2020
E.E.

Post facto T.A/T.S is accorded for Rs. 1,44,800 =

(.....crore..... One lacs Forty Four thousand
Eight hundred) only.

[Signature]
28.12.20
S.E. (R.W.D.)
works Circle
Motihari
29-12-20

Inspection Report for Flood Damage Works:-

Date:-

1. Name of PIUs:- Executive Engineer. R.W.D. (W) Div.ⁿ Dhaka
2. Name of Block:- Dhaka
3. Name of Road :- Bhandar 22 mile to Madhya Vidyalaya Saph

(A) For Road

1. Damage Location Chainage:-

2. Damage Length:- 10 M

3. Name of Damage:- Road damaged due to Flood.

4. Details of Restoration Work:-

- (i) Material being used in Restoration works:- Brick bats
- (ii) Equipments Tools being used in restoration works:- -
- (iii) Procedure take up in restoration works:- Departmental.
- (iv) Restored Length:- 10 M.


Executive Engineer
R.W.D. (W) Div.ⁿ
Raxaul