



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

2021-22

FLOOD DAMAGED REPORT



NH 103 Patrol Pump to Panchvinda dadanpur RCD Path tak.

DISTRICT	:-	Samastipur	
DIVISION	:-	Dalsingh Sarai	
BLOCK	:-	MORWA	
TOTAL LENGTH OF ROAD	:-	0.175	KM
TOTAL COST OF PROJECT	:-	1.85	Lac

Site Photograph

Name of Road:- NH 103 Patrol Pump to Panchvinda dadanpur RCD Path tak.

Block:- Morwa

Distt- Samastipur



Spand
श्रीवा

Spand
श्रीवा

FDR
YEAR (2021-2022)
GENERAL ABSTRACT OF COST

BLOCK :- Morwa

DISTRICT :- SAMASTIPUR

NAME OF ROAD :- Repair of Road NH 103 Patrol Pump to Panchvinda dadanpur RCD Path tak.

S.NO	ITEM OF WORK	AMOUNT
A		
TOTAL COST OF CONSTRUCTION		
		Rs. 185146
SUB TOTAL		Rs. 185146


5/11/21

Junior Engineer

RWD (W) Section, Morwa


5/11/21

Assistant Engineer
RWD (W) Sub Division,
Morwa

Executive Engineer
RWD, Works Division,
Dalsinghsarai

SUMMARY OF COST ESTIMAT FOR THE PROJECT

NAME OF ROAD :- Repair of Road NH 103 Patrol Pump to Panchvinda dadanpur RCD Path tak.

DISTRICT

SAMASTIPUR

BLOCK

Morwa

S.NO	DESCRIPTION	AMOUNT LAKH
1	BRICK BAT	163846.000
	SUB TOTAL:-	163846.000
	12% GST on Total Amount:-	19661.520
	1% Labour Cess	1638.460
	Total Cost (including GST and Labour Cess	185146.000


Junior Engineer

RWD (W) Section, Morwa


Assistant Engineer

RWD (W)Sub Division, Morwa

Executive Engineer


RWD, Works Division, Dalsinghsarai

Figure -3

Quarry Map

Name of Road :- NH 103 Patrol Pump to Panchvinda dadanpur RCD Path tak.
 Block :- Morwa
 District :- Samastipur

Length of the Road:- 0.175 KM

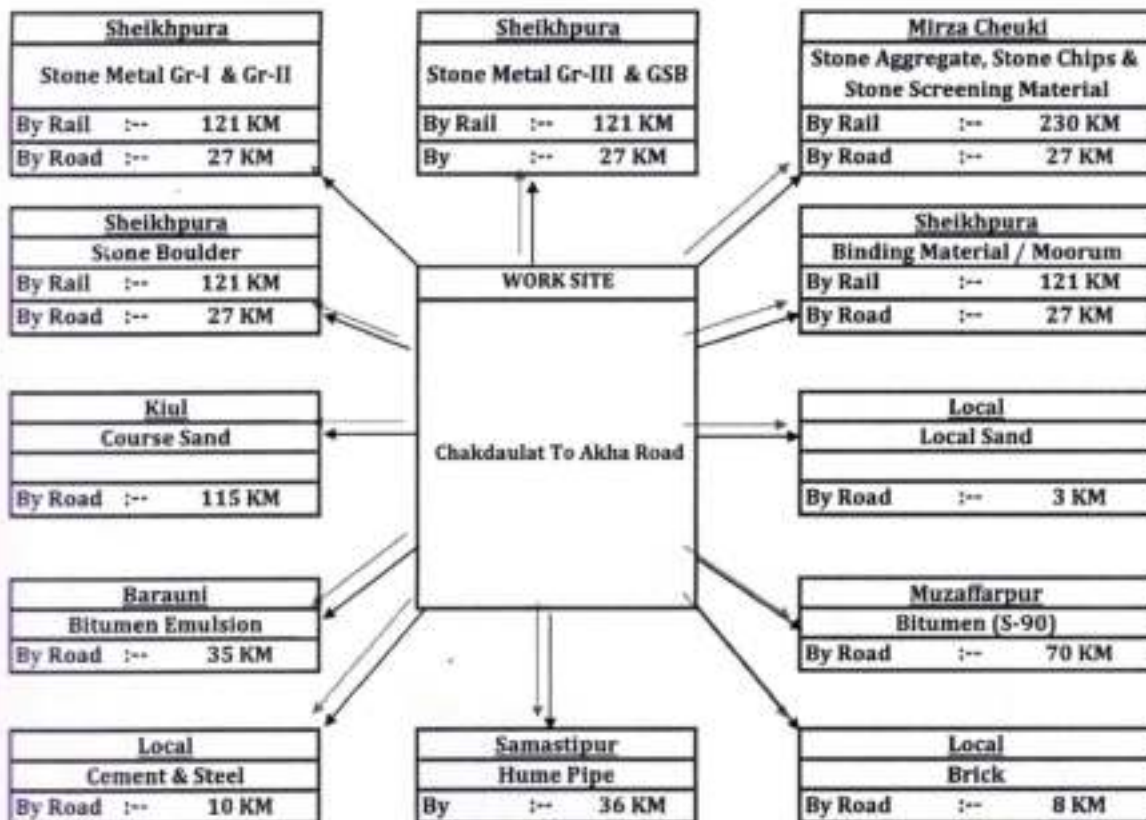

* Subjected to Verification of Lead

Spand
5/11/21
J.E

Dr. B. K. Singh
5/11/21
A.E

E.E

S.E.

Analysis for Carriage by Road & Rail

Sl No	Item with Source	Unit	Source Up to	Carriage Cost & Lead in Km			Leaving & Unloading Cost	Carriage Cost by Rail Head	Total ₹	Total ₹ Minimum
				Pucka / Surface	Katcha					
1	Stone Metal Gr-I & Gr-II (Sheikhpura by Rail 121 Km)	Cum	Sheikhpura	8.00 x 10.10 x 30.00 Km = Rs 668.93	8.00 x 24.30 x 0.00 Km = Rs 0.00	4.59	105.12	1025.87	Rs. 1799.92	Rs. 1799.92
				8.00 x 7.94 x 137.00 Km = Rs 1895.91	8.00 x 19.22 x 0.00 Km = Rs 0.00	4.59	210.19		Rs. 2106.10	
2	Stone Metal Gr-III (Sheikhpura by Rail 121 Km)	Cum	Sheikhpura	8.00 x 10.10 x 30.00 Km = Rs 615.31	8.00 x 24.30 x 0.00 Km = Rs 0.00	4.99	105.12	1128.34	Rs. 1848.77	Rs. 1848.77
				8.00 x 7.94 x 137.00 Km = Rs 1743.94	8.00 x 19.22 x 0.00 Km = Rs 0.00	4.99	210.19	1128.34	Rs. 3082.47	
3	Stone Aggregate / Chips (Mirza Chowki by Rail 230 Km)	Cum	Sheikhpura	8.00 x 10.10 x 30.00 Km = Rs 615.31	8.00 x 24.30 x 0.00 Km = Rs 0.00	4.99	105.12	1588.15	Rs. 2308.58	Rs. 2308.58
				8.00 x 7.94 x 137.00 Km = Rs 1743.94	8.00 x 19.22 x 0.00 Km = Rs 0.00	4.99	210.19	1588.15	Rs. 3542.28	
4	Stone Boulder (Sheikhpura by Rail 121 Km)	Cum	Sheikhpura	8.00 x 10.10 x 30.00 Km = Rs 639.67	8.00 x 24.30 x 0.00 Km = Rs 0.00	4.80	105.12	1159.81	Rs. 1994.60	Rs. 1994.60
				8.00 x 7.94 x 137.00 Km = Rs 1812.97	8.00 x 19.22 x 0.00 Km = Rs 0.00	4.80	210.19	1159.81	Rs. 3182.97	
5	Course Sand	Cum	Khal	8.00 x 7.94 x 208.00 Km = Rs 2647.73	8.00 x 19.22 x 0.00 Km = Rs 0.00	4.99	113.67		Rs. 2761.40	Rs. 2761.40
				8.00 x 10.10 x 38.00 Km = Rs 511.73	8.00 x 24.30 x 0.00 Km = Rs 0.00	6.00	113.67	851.49	Rs. 1476.89	Rs. 1476.89
6	Binding Material/Moorum (Sheikhpura by Rail 121 Km)	Cum	Sheikhpura	8.00 x 7.94 x 137.00 Km = Rs 1450.37	8.00 x 19.22 x 0.00 Km = Rs 0.00	6.00	66.31	851.49	Rs. 2368.17	
				8.00 x 10.10 x 2.00 Km = Rs 32.38	8.00 x 24.30 x 1.00 Km = Rs 38.96	4.99	113.67		Rs. 185.01	Rs. 185.01
7	Local Sand	Cum	Local	8.00 x 7.94 x 7.00 Km = Rs 222.32	8.00 x 19.22 x 1.00 Km = Rs 76.88	2.00	477.44		Rs. 776.64	Rs. 776.64
				8.00 x 7.94 x 10.00 Km = Rs 79.40	8.00 x 19.22 x 0.00 Km = Rs 0.00	8.00	347.32		Rs. 426.72	Rs. 426.72
8	Brick	1000 Nos	Local	8.00 x 7.94 x 10.00 Km = Rs 651.08	8.00 x 19.22 x 0.00 Km = Rs 0.00	8.00	370.58		Rs. 449.98	Rs. 449.98
				8.00 x 7.94 x 10.00 Km = Rs 79.40	8.00 x 19.22 x 0.00 Km = Rs 0.00	8.00	396.98		Rs. 1048.06	Rs. 1048.06
9	Cement	MT	Local	8.00 x 7.94 x 91.00 Km = Rs 722.54	8.00 x 19.22 x 0.00 Km = Rs 0.00	8.00	396.98		Rs. 1119.52	Rs. 1119.52
				8.00 x 7.94 x 36.00 Km = Rs 228.67	8.00 x 19.22 x 0.00 Km = Rs 0.00	10.00	70.84		Rs. 299.51	Rs. 299.51
10	Steel	MT	Local	8.00 x 7.94 x 36.00 Km = Rs 91.47	8.00 x 19.22 x 0.00 Km = Rs 0.00	25.00	30.36		Rs. 121.83	Rs. 121.83
				8.00 x 7.94 x 36.00 Km = Rs 38.11	8.00 x 19.22 x 0.00 Km = Rs 0.00	60.00	30.36		Rs. 68.47	Rs. 68.47
11	Bitumen Emulsion	MT	Barauni							
12	Bitumen	MT	Muzaffarpur							
13	Hume Pipe (1000 mm)	m	Samastipur							
14	Hume Pipe (600 mm)	m	Samastipur							
15	Hume Pipe (300 mm)	m	Samastipur							

Cost of Haulage Excluding Loading & Unloading as per KCR as

Type of Road	₹ Per Ton. Km by Tipper	₹ Per Ton. Km by Truck
For Surface Road	10.10	7.94
Unsurface Gravel Road	12.10	9.99
Katcha Road	24.30	19.22

* Subjected to Verification of Lead



 AE
 PWD



 EE
 RWD

FORM PB

Analysis of Rates (FORMAT F8)

SDB No.	MORD No.	DESCRIPTION	Unit	Quantity	Rate	Amount
Haulage BY TIPPER						
1	1.10	(i) Haulage excluding Loading & Unloading Haulage of materials by tipper excluding cost of loading, unloading and stacking. Unit = t.km Taking output 10 t load and lead 10 km = 100 t.km Case-I: Surfaced Road Speed with load: 25 km per hour Speed while returning empty: 35 km per hour				
	a)	Machinery Tipper 10 t capacity				
		Haulage with load	hour	0.40	1183.00	473.20
		Empty return trip	hour	0.29	1183.00	343.07
	b)	Overheads @ 12%				97.95
	c)	Contractor's profit @ 10% on (a+b)				91.42
		Cost for 100 t.km = a+b+c				1005.64
		Rate per cum = (a+b+c) / 100				10.06
			Rate Per Km.	Cum		10.06
2	1.10	(ii) Haulage excluding Loading & Unloading Haulage of materials by tipper excluding cost of loading, unloading and stacking. Unit = t.km Taking output 10 t load and lead 10 km = 100 t.km Case-II: Unsurfaced Gravel Road. Speed with load: 20 km/hour Speed for empty return trip: 30 km/hour				
	a)	Machinery Tipper 10 t capacity				
		Haulage with load	hour	0.50	1183.00	591.50
		Empty return trip	hour	0.33	1183.00	390.39
	b)	Overheads @ 12%				117.83
	c)	Contractor's profit @ 10% on (a+b)				109.97
		Cost for 100 t.km = a+b+c				1209.69
		Rate per cum = (a+b+c) / 100				12.10
			Rate Per Km.	Cum		12.10
3	1.10	(iii) Haulage excluding Loading & Unloading Haulage of materials by tipper excluding cost of loading, unloading and stacking. Unit = t.km Taking output 10 t load and lead 10 km = 100 t.km Case-III: Katcha Track and Track in River Bed/Nallah Bed and Choe Bed. Speed with load: 10 km per hour Speed while returning empty: 15 km per hour				
	a)	Machinery Tipper 10 t capacity				
		Haulage with load	hour	1.00	1183.00	1183.00
		Empty return trip	hour	0.67	1183.00	792.61
	b)	Overheads @ 12%				237.07
	c)	Contractor's profit @ 10% on (a+b)				221.27
		Cost for 100 t.km = a+b+c				2433.95
		Rate per cum = (a+b+c) / 100				24.34
			Rate Per Km.	Cum		24.34
Haulage BY TRUCK						
1.10	(i)	Haulage excluding Loading & Unloading Haulage of materials by tipper excluding cost of loading, unloading and stacking.				

Analysis of Rates (FORMAT F8)

Sl. No.	SDS No.	Item No.	DESCRIPTION	Unit	Quantity	Rate	
			Unit = tkm Taking output 10 t load and lead 10 km = 100 tkm Case-I : Surfaced Road Speed with load: 25 km per hour Speed while returning empty: 35 km per hour a) Machinery Truck 10 t capacity Haulage with load Empty return trip b) Overheads @ 12% c) Contractor's profit @ 10% on (a+b) Cost for 100 t-km = a+b+c Rate per cum = (a+b+c) / 100	hour hour	0.40 0.29	934.30 934.30	37 27 7 7 79
			Rate Per Km	Cum			
5	1.10	(II)	Haulage excluding Loading & Unloading Haulage of materials by tipper excluding cost of loading, unloading and stacking. Unit = tkm Taking output 10 t load and lead 10 km = 100 tkm Case-II: Unsurfaced Gravel Road. Speed with load: 20 km/hour Speed for empty return trip: 30 km/hour a) Machinery Truck 10 t capacity Haulage with load Empty return trip b) Overheads @ 12% c) Contractor's profit @ 10% on (a+b) Cost for 100 t-km = a+b+c Rate per cum = (a+b+c) / 100	hour hour	0.50 0.33	934.30 934.30	45 30 9 8 95
			Rate Per Km	Cum			
6	1.10	(III)	Haulage excluding Loading & Unloading Haulage of materials by tipper excluding cost of loading, unloading and stacking. Unit = tkm Taking output 10 t load and lead 10 km = 100 tkm Case-III : Katcha Track and Track in River Bed/Nallah Bed and Choe Bed. Speed with load: 10 km per hour Speed while returning empty: 15 km per hour a) Machinery Truck 10 t capacity Haulage with load Empty return trip b) Overheads @ 12% c) Contractor's profit @ 10% on (a+b) Cost for 100 t-km = a+b+c Rate per cum = (a+b+c) / 100	hour hour	1.00 0.67	934.30 934.30	93 62 18 17 192 1
			Rate Per Km	Cum			
7	1.10	RCD	Loading and Unloading of Stone Boulder/Stone aggregates/Sand/Kanker/Moorum. Placing tipper at loading point, loading with front end loader, dumping, turning for return trip, excluding time for haulage and Unit = cum Taking output = 5.5 cum Time required for i) Positioning of tipper at loading point ii) Loading by front end loader 1 cum bucket capacity @ 25 cum per hour iii) Maneuvering, reversing, dumping and turning for return iv) Waiting time, unforeseen contingencies etc Total a) Machinery Tipper 5.5 tonnes capacity Front end-loader 1 cum bucket capacity @ 25 cum/hour Overheads @ 12%	hour hour	0.33 0.93	1183.00 1403.00	37 40 10

Analysis of Rates (FORMAT F8)

ITEM NO.		DESCRIPTION		UNIT	DETAILS	PRICE	AMOUNT
		c) Contractor's profit @ 10% on (a+b)					95.58
		Cost for 5.5 cum = a+b+c					1051.36
		Rate per cum = (a+b+c) / 5.5					191.16
		Unloading will be by tippling					191.16
1.20	RCD	Loading and Unloading of Boulders by Manual Means					
		Unit = cum					
		Taking output = 5.5 cum					
	a) Labour						
	Mate	day	0.11	321.00		35.31	
	Mazdoor for loading and unloading	day	0.75	304.00		228.00	
	b) Machinery						
	Tipper 5.5 tonne capacity	hour	0.75	1183.00		887.25	
	Overheads @ 12%					138.07	
	d) Contractor's profit @ 10% on (a+b+c)					128.86	
	Cost for 5.5 cum = a+b+c+d					1417.49	
	Rate per cum = (a+b+c+d) / 5.5					257.73	
		Unloading will be by tippling					257.73
1.30	RCD	Loading and Unloading of Cement or Steel by Manual Means and					
		Unit = tonne					
		Taking output = 10 tonnes					
	a) Labour						
	Mate	day	0.08	321.00		25.68	
	Mazdoor for loading and unloading	day	2.00	304.00		608.00	
	b) Machinery						
	Truck 10 tonne capacity	hour	2.00	934.30		1868.60	
	Overheads @ 12%					300.27	
	d) Contractor's profit @ 10% on (a+b+c)					280.26	
	Cost for 10 tonnes = a+b+c+d					3082.81	
	Rate per tonnes = (a+b+c+d) / 10					308.28	
							308.28
1.1	(I)	Loading of Lime, Aggregate, Stone Boulder, Brick Aggregate, Kankar, Building Rubbish, Crushed Slag, Stone for Masonry Work by manual means including a lead upto 30 m					
		Unit = cum					
		Taking output = 5.5 cum					
	a) Labour						
	Mate	day	0.02	321.00		6.42	
	Mazdoor (Unskilled)	day	0.50	304.00		152.00	
	b) Machinery						
	Truck	hour	0.50	934.30		467.15	
	c) Overheads @ 12%					75.07	
	d) Contractor's profit @ 10% on (a+b+c)					70.06	
	Cost for 5.5 cum = a+b+c+d					770.70	
	Rate per cum = (a+b+c+d) / 5.5					140.13	
							140.13
11	(II)	Loading of Earth, Sand, Moorum, Manure, Flyash by manual means including a lead upto 30 m.					
		Unit = cum					
		Taking output = 5.5 cum					
	a) Labour						
	Mate	day	0.01	321.00		3.21	
	Mazdoor (Unskilled)	day	0.25	304.00		76.00	
	b) Machinery						
	Truck	hour	0.25	934.30		233.58	
	c) Overheads @ 12%					37.53	
	d) Contractor's profit @ 10% on (a+b+c)					35.03	
	Cost for 5.5 cum = a+b+c+d					385.35	
	Rate per cum = (a+b+c+d) / 5.5					70.06	
							70.06
	(III)	Unloading of Lime, Aggregate, Stone Boulder, Brick Aggregate, Kankar, Building Rubbish, Crushed Slag, Stone for Masonry Work by mechanical means including a lead upto 30 m					
		Unit = cum					
		Taking output = 5.5 cum					
	a) Labour						
	Mate	day	0.01	321.00		3.21	

Analysis of Rates (FORMAT F8)

Sl. No.		Description		Unit	Quantity	Rate	
		Mazdoor (Unskilled)		day	0.25	304.00	76.00
	b)	Machinery					
		Truck		hour	0.25	934.30	233.58
	c)	Overheads @ 12%					28.03
	d)	Contractor's profit @ 10% on (a+b+c)					35.89
		Cost for 5.5 cum = a+b+c+d					385.50
		Rate per cum = (a+b+c+d) / 5.5					70.09
		Total Cost		Cum			
		Total Loading & Unloading of Stone Aggregate		Cum	140.00	70.09	9812.60
13	(iv)	Unloading of Earth, Sand, Moorum, Manure, Flyash by manual means including a lead upto 30 m. Unit = cum Taking output = 5.5 cum					
	a)	Labour					
		Mate		day	0.01	321.00	3.21
		Mazdoor (Unskilled)		day	0.13	304.00	39.52
	b)	Machinery					
		Truck		hour	0.17	934.30	158.83
	c)	Overheads @ 12%					23.36
	d)	Contractor's profit @ 10% on (a+b+c)					21.81
		Cost for 5.5 cum = a+b+c+d					239.73
		Rate per cum = (a+b+c+d) / 5.5					43.59
		Total Cost		Cum			43.59
		Total Loading & Unloading of Sand / Moorum		Cum	70.06	43.59	3054.62
14	1.3	Loading, Unloading and Stacking of Bricks by Manual Means					
	(i)	Loading of Bricks by manual means including a lead upto 30 m Unit = 1000 Nos. Taking output = 2000 Nos.					
	a)	Labour					
		Mate		day	0.01	321.00	3.21
		Mazdoor (Unskilled)		day	0.25	304.00	76.00
	b)	Machinery					
		Truck		hour	0.33	934.30	308.32
	c)	Overheads @ 12%					46.59
	d)	Contractor's profit @ 10% on (a+b+c)					43.41
		Cost for 2000 Nos. = a+b+c+d					477.53
		Rate for 1000 bricks = (a+b+c+d) / 2					238.76
		Total Cost		No.			238.76
15	(ii)	Unloading and Stacking of Bricks by manual means including a lead upto 30 m Unit = 1000 Nos. Taking output = 2000 Nos.					
	a)	Labour					
		Mate		day	0.01	321.00	3.21
		Mazdoor (Unskilled)		day	0.25	304.00	76.00
	b)	Machinery					
		Truck		hour	0.33	934.30	308.32
	c)	Overheads @ 12%					46.59
	d)	Contractor's profit @ 10% on (a+b+c)					43.41
		Cost for 2000 Nos. = a+b+c+d					477.53
		Rate for 1000 bricks = (a+b+c+d) / 2					238.76
		Total Cost		No.			238.76
16	(i)	Loading and Unloading of Cement by Manual Means Loading of Cement by manual means including a lead upto 30 m Unit = t Taking output = 10 t					
	a)	Labour					
		Mate		day	0.04	321.00	12.84
		Mazdoor (Unskilled)		day	1.50	304.00	456.00

Analysis of Rates (FORMAT F8)

		Description		Unit	Quantity	Rate	Total
		b) Machinery	Truck	hour	1.00	934.30	934.30
		c) Overheads @ 12%					169.15
		d) Contractor's profit @ 10% on (a+b+c)					157.87
		Cost for 10 t = a+b+c+d					1736.58
		Rate per tonnes = (a+b+c+d)/10					173.66
17		(ii) Unloading of Cement by manual means including a lead upto 30 m					
		Unit = t					
		Taking output = 10 t					
	a)	Labour		day	0.06	321.00	19.26
		Mate		day	1.50	304.00	456.00
	b)	Machinery					
		Truck		hour	1.00	934.30	934.30
	c)	Overheads @ 12%					169.15
	d)	Contractor's profit @ 10% on (a+b+c)					157.87
		Cost for 10 t = a+b+c+d					1736.58
		Rate per tonne = (a+b+c+d)/10					173.66
		Total Cost					173.66
18	1.5	(i) Loading and Unloading of Structural Steel and Steel Bars by manual means					
		Loading of Structural Steel, Steel Bars by manual means including a lead upto 30 m					
		Unit = t					
		Taking output = 10 t					
	a)	Labour		day	0.07	321.00	22.47
		Mate		day	1.80	304.00	547.20
	b)	Machinery					
		Truck		hour	1.00	934.30	934.30
	c)	Overheads @ 12%					180.48
	d)	Contractor's profit @ 10% on (a+b+c)					168.44
		Cost for 10 t = a+b+c+d					1852.89
		Rate per tonnes = (a+b+c+d)/10					185.29
		Total Cost					185.29
19		(ii) Unloading of Structural Steel, Steel Bars by manual means including a lead upto 30 m					
		Unit = t					
		Taking output = 10 t					
	a)	Labour		day	0.07	321.00	22.47
		Mate		day	1.80	304.00	547.20
	b)	Machinery					
		Truck		hour	1.00	934.30	934.30
	c)	Overheads @ 12%					180.48
	d)	Contractor's profit @ 10% on (a+b+c)					168.44
		Cost for 10 t = a+b+c+d					1852.89
		Rate per t = (a+b+c+d)/10					185.29
		Total Cost					185.29
20	1.6	(i) Loading and Unloading of Bitumen Drums by Manual Means					
		Loading of Bitumen Drums by manual means including a lead upto 30 m					
		Unit = t					
		Taking output = 10 t					
	a)	Labour		day	0.06	321.00	19.26
		Mate		day	1.60	304.00	486.40
	b)	Machinery					
		Truck		hour	1.25	934.30	1167.88
	c)	Overheads @ 12%					200.82
	d)	Contractor's profit @ 10% on (a+b+c)					187.44
		Cost for 10 t = a+b+c+d					2061.80

Analysis of Rates (FORMAT F8)

ITEM NO.			DESCRIPTION	UNIT	QUANTITY	Rate	Total Cost
			Rate per tonnes = (a+b+c+d)/10				
21		(II)	Unloading of Bitumen Drums by Manual Means including a lead upto 30 m				
			Unit = t				
			Taking output = 10 t	day	0.05	321.00	
		a)	Labour	day	1.20	304.00	
			Mate				
			Mazdoor (Unskilled)	hour	1.25	934.30	
		b)	Machinery				
			Truck				
		c)	Overheads @ 12%				
		d)	Contractor's profit @ 10% on (a+b+c)				
			Cost for 10 t = a+b+c+d				
			Rate per t = (a+b+c+d)/10				
		Note :-	The rate is inclusive of the self weight of drum				
			Total Cost				
			Total Loading & Unloading of Bitumen Drums			206.18	90.8
22	1.9	(I)	Loading and Unloading of Hume Pipes				
			Loading of RCC Hume pipes by mechanical means including a lead upto 30 m				
		A.	1000 / 1200 mm dia Hume pipe				
			Unit = per pipe				
			Taking output = 9 pipes				
		a)	Labour	day	0.02	321.00	
			Mate	day	0.50	304.00	
			Mazdoor (Unskilled)				
		b)	Machinery	hour	0.33	934.30	
			Truck	hour	0.33	909.00	
			Crane				
		c)	Overheads @ 12%				
		d)	Contractor's profit @ 10% on (a+b+c)				
			Cost for 9 pipes = a+b+c+d				
			Rate per pipe = (a+b+c+d)/9				
			Total Cost				
23		C.	600/450 mm dia Hume pipe				
			Unit = per pipe				
			Taking output = 21 pipe				
		a)	Labour	day	0.02	321.00	
			Mate	day	0.50	304.00	
			Mazdoor (Unskilled)				
		b)	Machinery	hour	0.33	934.30	
			Truck	hour	0.33	909.00	
			Crane				
		c)	Overheads @ 12%				
		d)	Contractor's profit @ 10% on (a+b+c)				
			Cost for 21 pipes = a+b+c+d				
			Rate per pipe = (a+b+c+d)/21				
			Total Cost				
24		(II)	Unloading of RCC Hume pipe by mechanical means including a lead upto 30 m				
		A.	1000/1200 mm dia RCC Hume pipes				
			Unit = per pipe				
			Taking output = 9 pipes				
		a)	Labour				
			Mate				
			Mazdoor (Unskilled)	day	0.02	321.00	
		b)	Machinery	day	0.50	304.00	
			Truck				
			Crane	hour	0.20	934.30	
		c)	Overheads @ 12%	hour	0.20	909.00	
		d)	Contractor's profit @ 10% on (a+b+c)				
			Cost for 9 pipes = a+b+c+d				
			Rate per pipe = (a+b+c+d)/9				

Analysis of Rates (FORMAT F8)

25	C	600/450 mm dia Hume pipe Unit = per pipe Taking output = 21 pipes				
	a)	Labour				
		Mate	day	0.02	321.00	6.42
		Mazdoor (Unskilled)	day	0.50	304.00	152.00
	b)	Machinery				
		Truck	hour	0.20	934.30	186.86
		Crane	hour	0.20	909.00	181.80
	c)	Overheads @ 12%				63.25
	d)	Contractor's profit @ 10% on (a+b+c)				59.03
		Cost for 21 pipes = a+b+c+d				649.36
		Rate per pipe = (a+b+c+d)/21				30.92
26	1.16	100	Setting Out Pillars Unit = 1 No. Analysis of rates per pillar shall account for following: Typical Benchmark 1 no. as per Dwg no. 200.1 of MORD Data Book (Page 1-18) The rate analysis for a typical benchmark as per dwg.			
		1. Excavation	cum	0.33	334.58	108.74
		2. P.C.C. grade M 10	cum	0.10	6681.46	668.15
		3. Brick Masonry in CM 1:4	cum	0.48	6237.17	2962.66
		4. Plastering with CM 1:4, 15 mm thick cement plaster on Brick work.	sqm	2.63	216.63	569.74
		Add 5 per cent cost of items No.1 to 4 for white washing.				215.46
		Sub Total	NO			4524.74
27	1.16	100	Setting Out Pillars Unit = 1 No. Analysis of rates per pillar shall account for following: Reference Pillar 1 no. as per Dwg no. 200.2 of MORD Data Book (Page 1-18) The rate analysis for a typical benchmark as per dwg.			
		1. Excavation	cum	0.192	334.58	64.24
		2. P.C.C. grade M 10	cum	0.060	6681.46	400.89
		3. Brick Masonry in CM 1:4	cum	0.193	6237.17	1203.77
		4. Plastering with CM 1:4, 15 mm thick cement plaster on Brick work.	sqm	1.50	216.63	324.95
		Add 5 per cent cost of items No.1 to 4 for white washing.				99.69
		Sub Total	NO			2093.54
28	1.16	100	Setting Out Pillars Unit = 1 No. Analysis of rates per pillar shall account for following: Reference Pillar 1 no. as per Dwg no. 200.2 of MORD Data Book (Page 1-18) The rate analysis for a typical benchmark as per dwg.			
		1. Excavation	cum	0.192	334.58	64.24
		2. P.C.C. grade M 10	cum	0.060	6681.46	400.89
		3. Brick Masonry in CM 1:4	cum	0.193	6237.17	1203.77
		4. Plastering with CM 1:4, 15 mm thick cement plaster on Brick work.	sqm	1.50	216.63	324.95
		Add 5 per cent cost of items No.1 to 4 for white washing.				99.69
		Sub Total	NO			2093.54
26	OLD SOR	8.1.3.2 (iii)	Providing brick bats including spreading laying hand packing and compacting with C.I. Hammer in layers not exceeding 75 mm thick including cost of light barriers, danger signals, chowkidar, taxes, royalty etc. all complete job as per specification and direction of E/I including carriage cost of bricks.			
		Unit = cum Assuming- 2.832 Cum				
	a)	Labour (Unskilled)				
		i) Carrying, spreading, laying & Packing	nos	1.50	304.00	456.00
		ii) Compaction brick bats with C.I. Hammer.	nos	0.67	304.00	203.68
		iii) Brick Bat	Cum	2.83	1063.00	3010.42
		iv) Local Sand	Cum	0.63	141.85	89.65
		Over Heads @ 12 % on (a+b+c)				451.17
		C. Profit @ 10 % on (a+b+c+d)				421.09
	d)	Cost for 2.832 cum = a+b+c+d				4632.01
	e)	Rate Per cum = (a+b+c+d)/2.832	cum			1635.40
		CARRIAGE				
		Carriage for Brick (1 cum Bats = 300 nos Bricks)	nos	0.300	776.64	233.10
		Rate per cum with carriage				1868.70

Analysis of Rates (FORMAT F8)

Sl. No.	Particulars	DESCRIPTION	Unit	Quantity	Rate	Total
27	5.7.6	Labour for cutting 62 mm to 75 mm dia bamboo piles to size and making shoes and driving etc complete job as per specification and direction of E/L. Unit = Per M Taking Out put = 10 Joint (Assuming 10 Joints)				
	a)	Materials Nut And Bolts 16 mm Dia 225mm Long With Washer etc.	nos	20.00	32.88	657.60
	b)	Laber Carpenter Gril Unskilled Mazdoor	nos nos	0.50 0.25	408.00 304.00	204.00 76.00
	c)	Overheads @ 12%				112.51
	d)	Contractor's profit @ 10% on (a+b+c+d)				105.01
	e)	Rate Per cum = (a+b+c+d)/10	Per M			115.51
28	5.7.7	Labour for cutting 62 mm to 75 mm dia bamboo piles to size and making shoes and driving etc complete job as per specification and direction of E/L. Unit = Per M Taking Out put = 30.50 M (Assuming 20 nos, Pile Sunk 1.525 Mtr Deep)				
	b)	Laber Carpenter Gril Unskilled Mazdoor	nos nos	0.25 2.50	408.00 304.00	102.00 760.00
	c)	Overheads @ 12%				103.44
	d)	Contractor's profit @ 10% on (a+b+c+d)				96.54
	e)	Rate Per cum = (a+b+c+d)/30.5	Per M			34.82
29	5.7.8	Labour for fitting and fixing split bamboo woven chachari Inn position with 20 swg G.I. wire or 75 mm to 100 mm long nails alternatively including cost of G.I. wire or nails complete job as per specification and direction of E/L. Unit = Per M Taking Out put = 9.30 M (Assuming 20 nos, Pile Sunk 1.525 Mtr Deep)				
	a)	Materials 75 mm To 100 mm Lon Nails	Kg	0.25	61.74	15.44
	b)	Laber Carpenter Gril Unskilled Mazdoor	nos nos	1.00 1.00	408.00 304.00	408.00 304.00
	c)	Overheads @ 12%				87.25
	d)	Contractor's profit @ 10% on (a+b+c+d)				81.41
	e)	Rate Per cum = (a+b+c+d)/9.30	Per M			96.31
30	5.7.9	Labour for fitting and fixing 62 mm to 75 mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails complete job as per specification and direction of E/L. Unit = Per M Taking Out put = 30.50 M				
	a)	Materials 75mm To 100 mm Lon Nails	Kg	0.25	61.74	15.44
	b)	Laber Carpenter Gril Unskilled Mazdoor	nos nos	0.125 0.250	408.00 304.00	51.00 76.00
	c)	Overheads @ 12%				17.0
	d)	Contractor's profit @ 10% on (a+b+c+d)				15.9
	e)	Rate Per cum = (a+b+c+d)/30.5	Per M			5.1

Analysis of Rates (FORMAT F8)

Sl. No.	Item No.	Description	Unit	Quantity	Rate	Amount
35	4.10	401 Granular Sub-base with Well Graded Material (Table 400.1) (By mix in place method) For Grading II Material Construction of granular sub-base by providing well graded material, spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401. Unit = cum Taking output = 300 cum				
	a)	Labour				
		Mate	day	0.48	321.00	154.08
		Mazdoor (Skilled)	day	2.00	385.00	770.00
		Mazdoor (Unskilled)	day	10.00	304.00	3040.00
	b)	Machinery				
		Tractor mounted grader arrangement for grading @ 100 cum per hour	hour	12.00	573.20	6878.40
		Three wheel 80-100 kN static roller @ 10 cum per hour	hour	30.00	803.00	24090.00
		Tractor with Rotavator 25 cum per hour	hour	12.00	629.00	7548.00
		Water tanker 6 kl capacity	hour	5.00	907.00	4535.00
	c)	Material				
		Well graded granular sub-base material as per Table 400.1				
		26.5 mm to 9.5 mm @ 35 per cent	cum	134.40	595.36	80016.38
		9.5 mm to 2.36 mm @ 25 per cent	cum	96.00	506.92	48664.32
		2.36 mm below @ 40 per cent - Local Sand	cum	153.60	141.85	21788.16
		Water	kl	30.00	40.00	1200.00
	d)	Overheads @ 12%				23842.12
	e)	Contractor's profit @ 10% on (a+b+c+d)				22252.65
		Cost of GSB for 300 cum				244779.11
		A) Cost of GSB without carriage per cum	cum			815.93
	f)	CARRIAGE				
		Carriage for GSB material	Cum	0.768	1670.65	1283.06
		Carriage for material below 2.36 mm (Local Sand)	Cum	0.512	185.01	94.73
		Rate per cum with carriage				2193.71
		Total Cost	CUM			2193.71