

**कार्यपालक अभियंता का कार्यालय,
ग्रामीण कार्य विभाग, कार्य प्रमंडल, कटिहार।**

पत्रांक :- 1788
प्रेषक,
कार्यपालक अभियंता,
ग्रा0का0वि0, कटिहार।
सेवा में,

/कटिहार, दिनांक-29-09-2021

अपर-मुख्य-कार्यपालक-पदाधिकारी,
BRRDA, 3रीं मंजिल, भूमि विकास बैंक भवन,
बिहार, पटना।

विषय :- शीर्ष New Maintenance Policy-2018 योजनान्तर्गत निर्माण हेतु आवंटन की
अधियाचना के संबंध में।

महाशय,

उपर्युक्त विषय के संबंध में कहना है कि शीर्ष New Maintenance Policy-2018
योजनान्तर्गत ग्रा0का0वि0, कार्य प्रमंडल, कटिहार द्वारा विहित प्रपत्र में अधियाचना तैयार कर आपके
अग्रेतर कार्रवाई हेतु समर्पित की जाती है।

अनु0:-यथोक्त।

विश्वासभाजन

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, कटिहार।

ज्ञापांक:- 1788

/कटिहार, दिनांक:- 29-09-2021

प्रतिलिपि:- नोडल पदाधिकारी, 3054 MR, ग्रामीण कार्य विभाग, बिहार, पटना को सूचनार्थ एवं
आवश्यक कार्रवाई हेतु समर्पित।

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, कटिहार।

RWD, Works Division, Katihar

Requisition Format for Scheme Head - MR (3054) Under Bihar Rural Road Maintenance Policy 2018 (Initial Rectification and Surface Renewal) Name of Division : Katihar

Sl No	Package no.	Name of Road	Project ID as per MIS	Administrative Approval (AA)	Administrative Approval (AA) Letter No. & Date	Agreement Amount (in Lac)	Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of IRI (in mm/km)	Thickness of Bitumen Layer (in mm)	Value of Bitumen Content in percentage	Previous Total Allotted Amount (In Lac)	up to date expenditure as per MIS (In Lac)	Requisition Against work done (In lac)	Remarks
1	MIR-N/19-20 Katihar/09	Dumar Chowk To Bhangaha Via Chhotar	21105508073	Length (In Km) 2.300	Amount (in Lac) 90.731	Initial Rectification with Surface Renewal (in lac) 64.44034	5 years Routine Maintenance (in lac) 23.20366	02MBD/20-21, 02.07.2020	05.06.21	2848.04	25mm	5.1%	22.44800	22.44800	25.13326	Completed
2	MIR-N/19-20 Katihar/09	Sameli NH-31 to Bankhari Station Via Bakhari village	21105501018	Length (In Km) 3.000	Amount (in Lac) 115.978	Initial Rectification with Surface Renewal (in lac) 72.79876	5 years Routine Maintenance (in lac) 30.55224	02MBD/20-21, 02.07.2020	05.06.21	2182.22	25mm	5.1%	26.20400	26.20400	43.10635	Completed
													48.65200	48.65200	68.23961	

[Signature]
Executive Engineer
RWD, Works Division, Katihar
25.9.2021

FORM GFR 19-A

(See Government of India's Decision (1) below Rule-150)
Form of Utilisation Certificate upto the month of Sep, 2021

New Maintenance Policy-2018

Sl. No.	Name of Scheme	Sanction No. & Date with Amount (in Rs. Lacs)	Amount Received (in Rs. Lacs)	Particulars
1	New Maintenance Policy-2018	Lt. No.- 017 Dt.- 26.02.21	80.03702	Certified that out of Rs. 791.93456 lacs received upto the year-2021-22 in favour of Ex. Engineer, RWD, Katihar a sum of Rs. 662.97780 lacs has been utilized for the purpose of NMP-2018 rural roads Schemes as given in the margin for which it was sanctioned and that the balance of Rs. 128.95676 lacs remaining unutilized at the end of the period under.
		Lt. No.- 027 Dt.- 04.05.21	70.40501	
		Lt. No.- 040 Dt.- 14.06.21	368.10325	
		Lt. No.- 052 Dt.- 24.08.21	273.38928	
		Total :-	791.93456	

2. Certified that I have satisfied myself that the conditions on which the grants-in-aid was sanctioned have been duly fulfilled/are being fulfilled and that I have exercised the following checks to see that the money was actually utilized for the purpose for which it was sanctioned.

Kind of Checks exercised :-

- Works have been supervised by Executive Engineer/Superintending Engineer.
- Periodical inspection has been conducted by Executive Engineer/Superintending Engineer.
- Construction materials have been tested.
- Measurements have been recorded in the MBs and test check conducted by the Assistant.
- All other codal formalities have been observed.

3. Physical Progress achieved :-

- Construction of Road Works.
- Construction of CD Works.

[Signature]
Executive Engineer,
RWD (W) Division, Katihar.
29-9-2021

Lab Job number :73

Date :22-06-2021

Name of Customer :Aastha And Saumya Construction


Name of Work/ Road :Dumar to Chochar

Sr.no	Location of test (in km)	Corrected U.I value (mm/km)	Road catagory
1	0.1	2497	G
2	0.2	2981	G
3	0.3	2593	G
4	0.4	2303	G
5	0.5	3272	G
6	0.6	2690	G
7	0.7	1915	G
8	0.8	3369	G
9	0.9	2884	G
10	1	3272	G
11	1.1	2400	G
12	1.2	3756	G
13	1.3	3078	G
14	1.4	2593	G
15	1.5	2981	G
16	1.6	3272	G
17	1.7	2109	G
18	1.8	2593	G
19	1.9	3756	G
20	2	2787	G
21	2.1	2981	G
22	2.2	2400	G
23	2.3	3023	G
Average IRI Value		2848.04	



22-06-2021

J-E


22.06.2021
A-E


22/6/2021

Lab Job number :73
Date :22-06-2021

Name of Customer :Aastha And Saumya Construction
Name of Work/ Road :Dumar to Chochar

Date	Time	Section No.	Length in km	Bumps in mm	Speed Rate	OR mm/km	IRI mm/km	CATEGORY ROAD	Latitude	Longitude	Event
22/6/21	14:0:30	73	0.1	250	0	2500	2497	G	25.534277	87.32468	Curve
22/6/21	14:1:5	73	0.1	300	10.1	3000	2981	G	25.53499	87.32520	Normal
22/6/21	14:1:5	73	0.1	260	20.2	2600	2593	G	25.53563	87.32539	Normal
22/6/21	14:1:41	73	0.1	230	20.2	2300	2303	G	25.53653	87.32560	Normal
22/6/21	14:1:41	73	0.1	330	20.2	3300	3272	G	25.53472	87.32586	Normal
22/6/21	14:2:16	73	0.1	270	20.2	2700	2690	G	25.53830	87.32566	Normal
22/6/21	14:2:16	73	0.1	190	20.2	1900	1915	G	25.53925	87.32562	Normal
22/6/21	14:2:16	73	0.1	340	20.2	3400	3369	G	25.54012	87.32551	Bridge
22/6/21	14:2:16	73	0.1	290	20.2	2900	2884	G	25.54099	87.32555	Normal
22/6/21	14:2:51	73	0.1	330	20.2	3300	3272	G	25.54191	87.32567	Normal
22/6/21	14:3:26	73	0.1	240	10.1	2400	2400	G	25.54278	87.32577	Curve
22/6/21	14:3:26	73	0.1	380	20.2	3800	3756	G	25.54336	87.32539	Normal
22/6/21	14:4:2	73	0.1	310	20.2	3100	3078	G	25.54399	87.32473	Normal
22/6/21	14:4:2	73	0.1	260	20.2	2600	2593	G	25.54462	87.32400	Normal
22/6/21	14:4:37	73	0.1	300	20.2	3000	2981	G	25.54526	87.32329	Normal
22/6/21	14:4:37	73	0.1	330	20.2	3300	3272	G	25.54593	87.32264	Normal
22/6/21	14:5:12	73	0.1	210	20.2	2100	2109	G	25.54663	87.32203	Normal
22/6/21	14:5:12	73	0.1	260	20.2	2600	2593	G	25.54736	87.32145	Speed Breaker
22/6/21	14:5:48	73	0.1	380	10.1	3800	3756	G	25.54809	87.32091	Normal
22/6/21	14:5:48	73	0.1	280	20.2	2800	2787	G	25.54878	87.32027	Normal
22/6/21	14:6:23	73	0.1	300	20.2	3000	2981	G	25.54935	87.31990	Normal
22/6/21	14:6:23	73	0.1	240	20.2	2400	2400	G	25.55055	87.31998	Normal
22/6/21	14:7:0	73	0.092	280	10.1	3043	3023	G	25.55190	87.319578	Normal

$$Y = 0 * X^2 + 0.969 * X + 74.60$$

X = 3043
Y = 3023

(R) RURAL ROAD


Good <4000
Average 4001-5000
Poor >5001

[Signature]

[Signature]
22.06.2021
A-E

[Signature]
22.06.2021
J'E

File : C:\PRAM KUMAR\MISC Files\Bump integrator\Sameli\Ashtha Saumya_22.06.2021_2 Roads\22061410 Dummer to
Name of Customer : Aastha And Saumya Construction, Name of Work/ Road : Dumar to Chochar, Lab Job number,

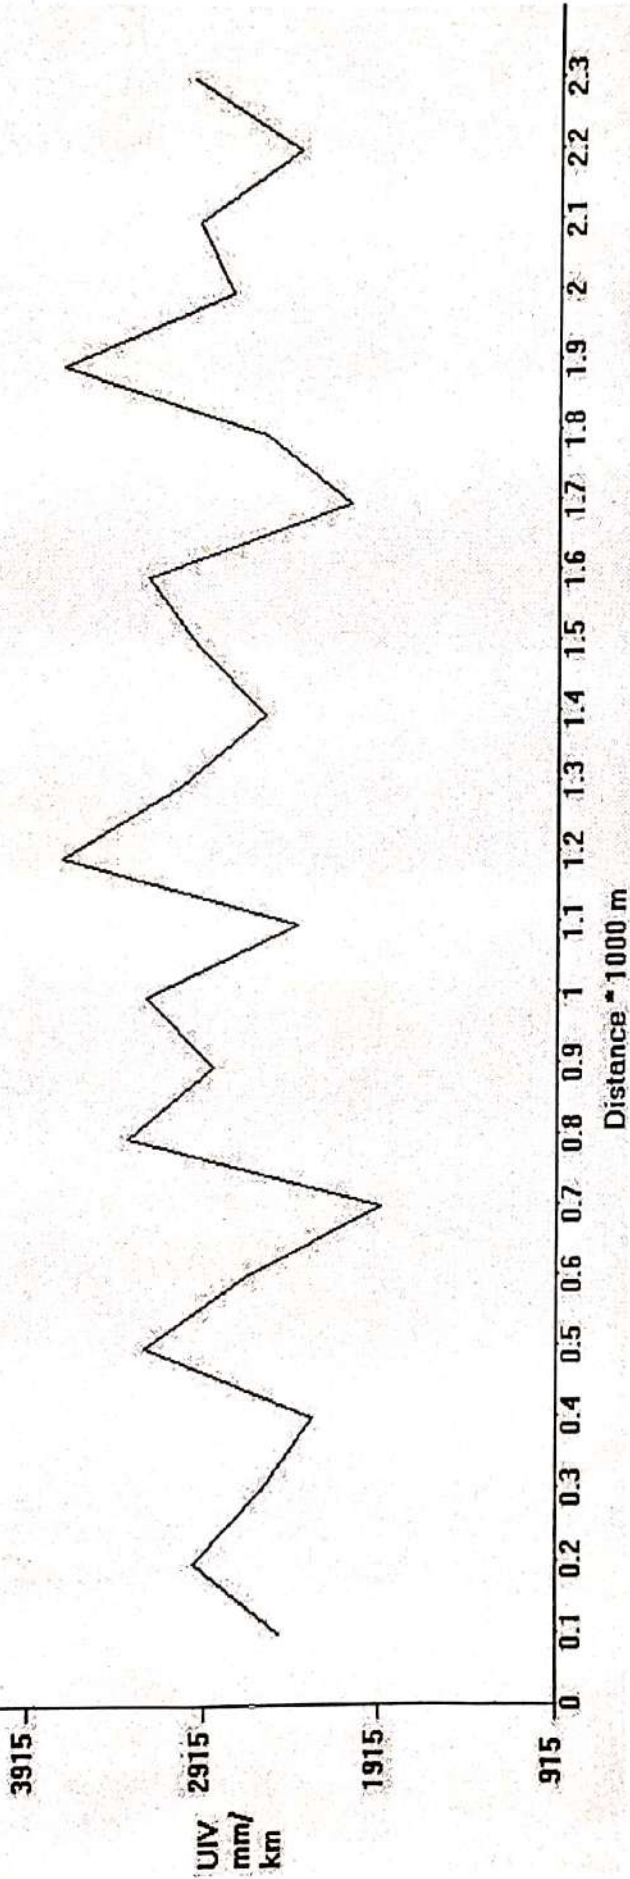

[Signature]
22/06/2021

[Signature]
22.06.2021
A-E

[Signature]
22.06.2021
J-E