

कार्यपालक अभियंता का कार्यालय

ग्रामीण कार्य विभाग, कार्य प्रमंडल, सीवान-01

पत्रांक 12193180

दिनांक 30/9/21

प्रेषक,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, सीवान-01

सेवा में,

नोडल पदाधिकारी (3054) MR
ग्रामीण कार्य विभाग,
बिहार पटना

विषय:- योजना शीर्ष नई अनुरक्षण नीति 2018 MR/3054 अंतर्गत पथो मे मरम्मती हेतु अधियाचना के संबंध मे ।

महाशय,

उपर्युक्त विषयक प्रासंगिक पत्र के आलोक मे कहना है कि इस प्रमंडल अंतर्गत योजना शीर्ष नई अनुरक्षण नीति 2018 MR/3054 अंतर्गत संलग्न विहित प्रपत्र मे 93.55000 लाख रुपए मात्र आवंटन देने की कृपा की जाय ।

अनु0- अधियाचना पत्र, Bump Integrator Equipment Report की छाया प्रति, एकरारनामा की छाया प्रति ।


विश्वासभाजन



30/9/21

कार्यपालक अभियंता,

ग्रामीण कार्य विभाग,

कार्य प्रमंडल, सीवान-01


30.09.21



30/09/21

Requisition Format for Scheme Head MR (3054) under Bihar Rural Road Maintenance Policy-2018 (Initial Rectification & Surface Renewal)

Name of the Works Division :-Siwan-1

Sl. No.	Package No.	Name of Road	Project_ID as per MIS	Administrative Approval (AA) Letter No. & Date	Administrative Approval (AA)		Agreement Amount (in Lakh)		Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of IRI (in mm/km)	Thickness of Bitumen Layer (in mm)	Value of Bitumen Content (in percentage)	Previous Total Allotted Amount (in Lakh)	Upto date Expenditure as per MIS (in Lakh)	Requisition against work done (in Lakh)	Remarks
					Length (in km.)	Amount (in Lakh)	Initial Rectification with Surface Renewal (in Lakh)	5 Years Routine Maintenance (in Lakh)										
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
1	RM/SI/SIW/20/03	Lakri to Aurai	31406702013	659/10.02.2020	4.000	154.32	93.70	39.081	32MBD/2020-21/23.09.2020	22.06.2021	04.09.2021	2461	25mm	5.00%	0.00000	0.00000	93.55000	

- 1 Signed Hard Copy and Soft Copy (in excell) of recorded IRI is enclosed.
- 2 Up- to- date Physical Progress has been uploaded in MIS.


 30/9/21
 Executive Engineer
 RWD, Siwan-01
 30.09.21

Road name :- Lakri to Aurai

Date	Time	Section	Length	Bumps	Speed	OR	IRI	TEGORY	Latitude	Longitude	Event
No.			in km	in mm	Rate	mm/km	mm/km	ROAD			
30/9/21	12:26:22	82	0.1	150	10.1	1500	1719	G	26.35271	84.37695	Normal
30/9/21	12:26:22	82	0.1	280	20.2	2800	2854	G	26.35218	84.37623	Normal
30/9/21	12:27:0	82	0.1	270	20.2	2700	2767	G	26.35177	84.37537	Normal
30/9/21	12:27:0	82	0.1	270	10.1	2700	2767	G	26.35127	84.37461	Normal
30/9/21	12:27:32	82	0.1	180	10.1	1800	1981	G	26.35084	84.37377	Normal
30/9/21	12:28:7	82	0.1	220	10.1	2200	2330	G	26.35036	84.37306	Normal
30/9/21	12:28:7	82	0.1	310	10.1	3100	3116	G	26.34957	84.37266	Normal
30/9/21	12:28:42	82	0.1	360	10.1	3600	3552	G	26.34887	84.37212	Normal
30/9/21	12:29:17	82	0.1	370	10.1	3700	3640	G	26.34805	84.37177	Normal
30/9/21	12:29:17	82	0.1	260	10.1	2600	2679	G	26.34769	84.37108	Normal
30/9/21	12:30:0	82	0.1	220	10.1	2200	2330	G	26.34704	84.37064	Normal
30/9/21	12:30:0	82	0.1	280	10.1	2800	2854	G	26.34618	84.37039	Normal
30/9/21	12:30:28	82	0.1	400	10.1	4000	3902	G	26.3459	84.3697	Normal
30/9/21	12:31:3	82	0.1	330	10.1	3300	3291	G	26.34526	84.36938	Normal
30/9/21	12:31:38	82	0.1	270	10.1	2700	2767	G	26.34461	84.36975	Normal
30/9/21	12:32:0	82	0.1	280	10.1	2800	2854	G	26.34382	84.36934	Normal
30/9/21	12:32:13	82	0.1	190	10.1	1900	2068	G	26.3437	84.3684	Normal
30/9/21	12:32:49	82	0.1	210	10.1	2100	2243	G	26.343	84.36753	Normal
30/9/21	12:33:24	82	0.1	250	0	2500	2592	G	26.3427	84.36712	Normal
30/9/21	12:34:0	82	0.1	320	10.1	3200	3203	G	26.342	84.36673	Normal
30/9/21	12:34:35	82	0.1	240	10.1	2400	2505	G	26.3413	84.36626	Normal
30/9/21	12:35:0	82	0.1	240	10.1	2400	2505	G	26.34049	84.36618	Normal
30/9/21	12:35:10	82	0.1	270	10.1	2700	2767	G	26.33979	84.36658	Normal
30/9/21	12:35:45	82	0.1	170	10.1	1700	1894	G	26.33901	84.36684	Normal
30/9/21	12:36:0	82	0.1	150	10.1	1500	1719	G	26.3382	84.36692	Normal
30/9/21	12:36:20	82	0.1	170	10.1	1700	1894	G	26.33732	84.36702	Normal
30/9/21	12:36:20	82	0.1	150	10.1	1500	1719	G	26.33642	84.36712	Normal
30/9/21	12:37:0	82	0.1	180	10.1	1800	1981	G	26.33558	84.36729	Normal
30/9/21	12:50:40	84	0.1	320	10.1	3200	3203	G	26.35364	84.37813	Normal
30/9/21	12:51:15	84	0.1	220	10.1	2200	2330	G	26.35419	84.37867	Normal
30/9/21	12:51:15	84	0.1	150	10.1	1500	1719	G	26.35438	84.37958	Normal
30/9/21	12:52:0	84	0.1	160	10.1	1600	1806	G	26.3547	84.38045	Normal
30/9/21	12:52:26	84	0.1	170	10.1	1700	1894	G	26.35547	84.38076	Culvert
30/9/21	12:53:1	84	0.1	110	10.1	1100	1370	G	26.35528	84.38168	Normal
30/9/21	12:53:1	84	0.1	270	10.1	2700	2767	G	26.35559	84.38256	Normal

$$Y = 0 * X^2 + 0.873 * X + 410.1$$

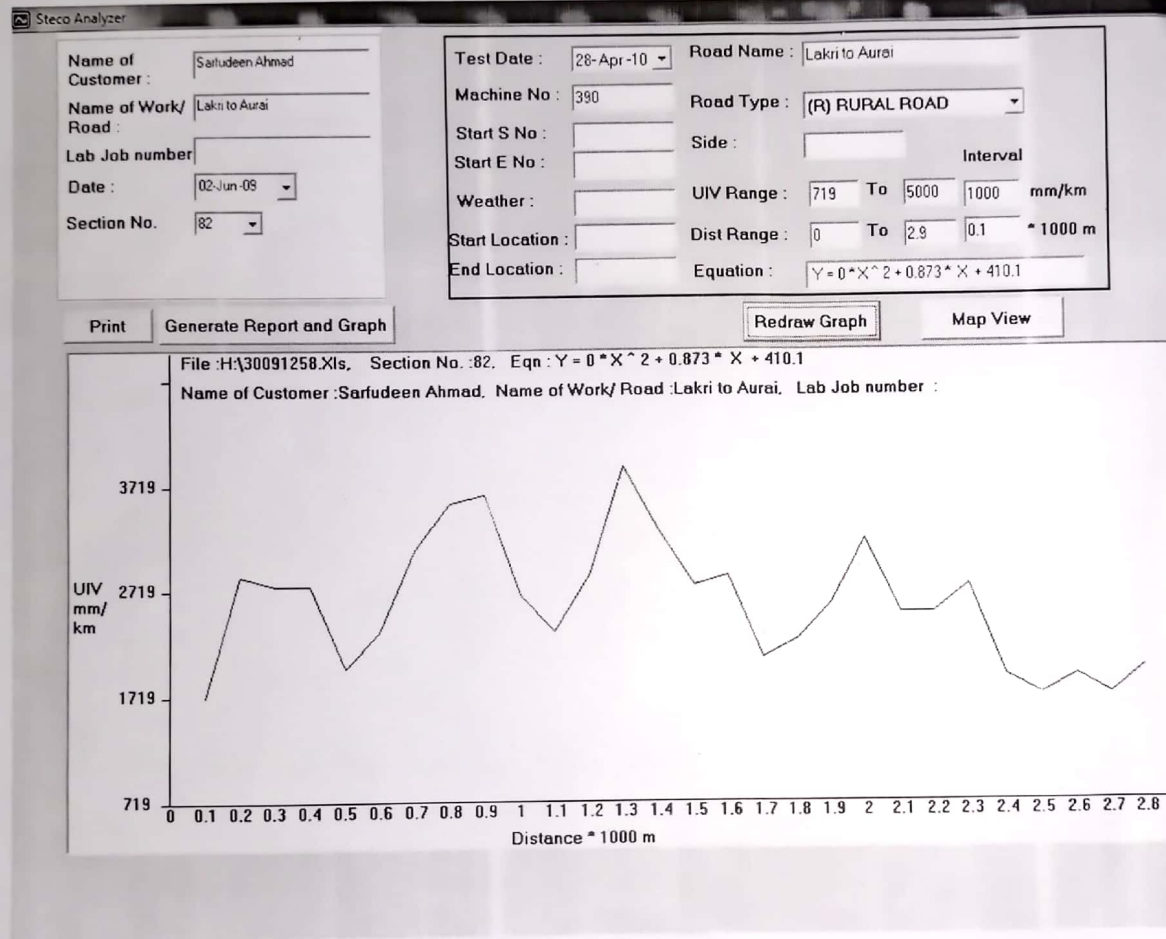
$$X = 2800$$

$$Y = 2854$$

(R) RURAL ROAD
 Good <4000 Average 4001-5000 Poor >5001

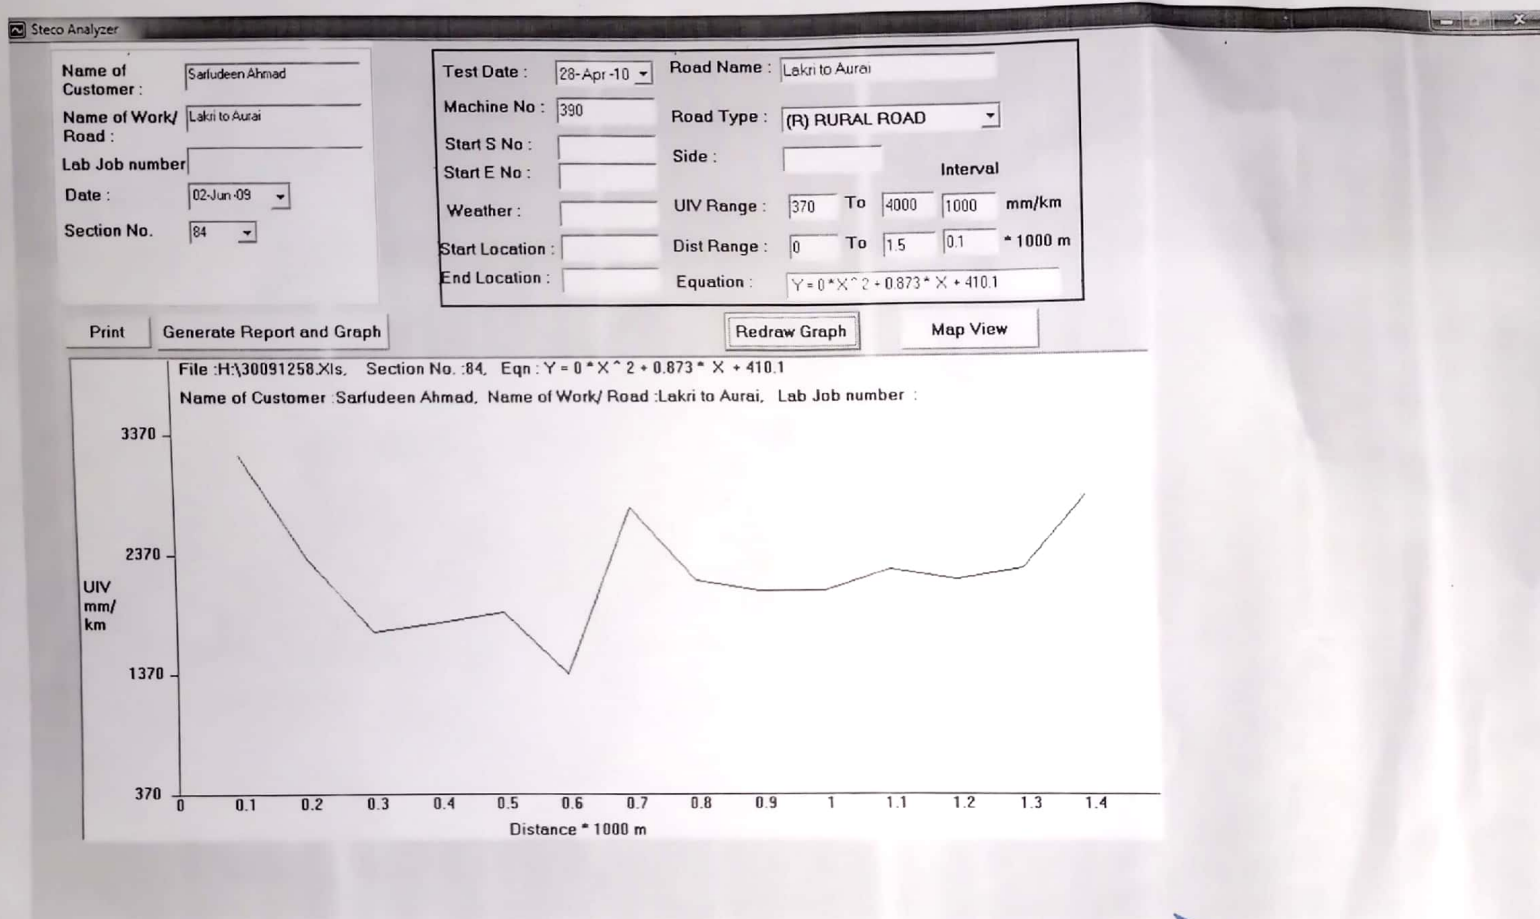
30/ 9/ 21	12: 53: 36	84	0.1	200	10.1	2000	2156	G		26.356	84.38343	Normal
30/ 9/ 21	12: 54: 11	84	0.1	190	10.1	1900	2068	G		26.3567	84.38397	Normal
30/ 9/ 21	12: 54: 11	84	0.1	190	10.1	1900	2068	G		26.35679	84.38488	Normal
30/ 9/ 21	12: 55: 0	84	0.1	210	10.1	2100	2243	G		26.35757	84.38507	Normal
30/ 9/ 21	12: 55: 22	84	0.1	200	10.1	2000	2156	G		26.35842	84.3853	Normal
30/ 9/ 21	12: 55: 22	84	0.1	210	10.1	2100	2243	G		26.3592	84.38564	Normal
30/ 9/ 21	12: 56: 0	84	0.1	280	10.1	2800	2854	G		26.36007	84.38593	Normal


 30/9/21
 82



dw
30/9/20
28


30/9/20
BR



30/9/10
EF

30/9/10
EF

प्रमाणित किया जाता है कि बड़हीया प्रॉपर्टी के
3054 (MR) योजना के तहत निर्मित पक्का लड्डी से
कोई भी बाधा प्रकृति में प्रादुर्भाव के
केन्द्र पर पूर्ण किया गया है।


30/9/21
उपनिवेश अधिकारी
बड़हीया।


28/9/2021
लगायत कमिशनर
बड़हीया।

भारतीय गैर न्यायिक INDIA NON JUDICIAL

एक हजार रुपये

रु.1000

ONE THOUSAND RUPEES

Rs.1000

BIHAR

Agreement No. 33 485/2020/21

Dated 27/12/2020

THIS AGREEMENT effect from the 23rd Day of.....September 2020 between Executive Engineer RWD Works Division, Siwan-01 (hereinafter "the Employer"), of the one part, Sarfudeen Ahmad At-Mohidipur PS-Siwan Dist-Siwan-841226 (Bihar) (hereinafter "the Contractor") of the other part. WHEREAS the Employer desires that the Works Known as Construction of Road

Package No.	Road Name	Lenth (KM.)	Main. Cons.	Maintenance
MR. N/2019-20-1/13 (Tender ID 92781) Under MR-3054 Block-Barhariya	Lakri to Auria	4.00	101.331	42.851
	Giyani More to sawana	3.50	60.616	30.290
	Kali (Giyani more) Parwa Mathiya	4.05	100.902	38.516
Total Cost.		262.849 + 111.657 = 374.506 (Lakh.)		

Agreement Value (7.86% below) ₹ 3,45,13,254.00 (Three Crore Forty-Five Lakh Thirteen Thousand Two Hundred Ninety-Four only) should be executed by the Contractor and has accepted a Bid by the contractor for the execution and completion (by 22nd June 2021) of these Works and the remedying of any defects therein as on 22nd June 2026.