



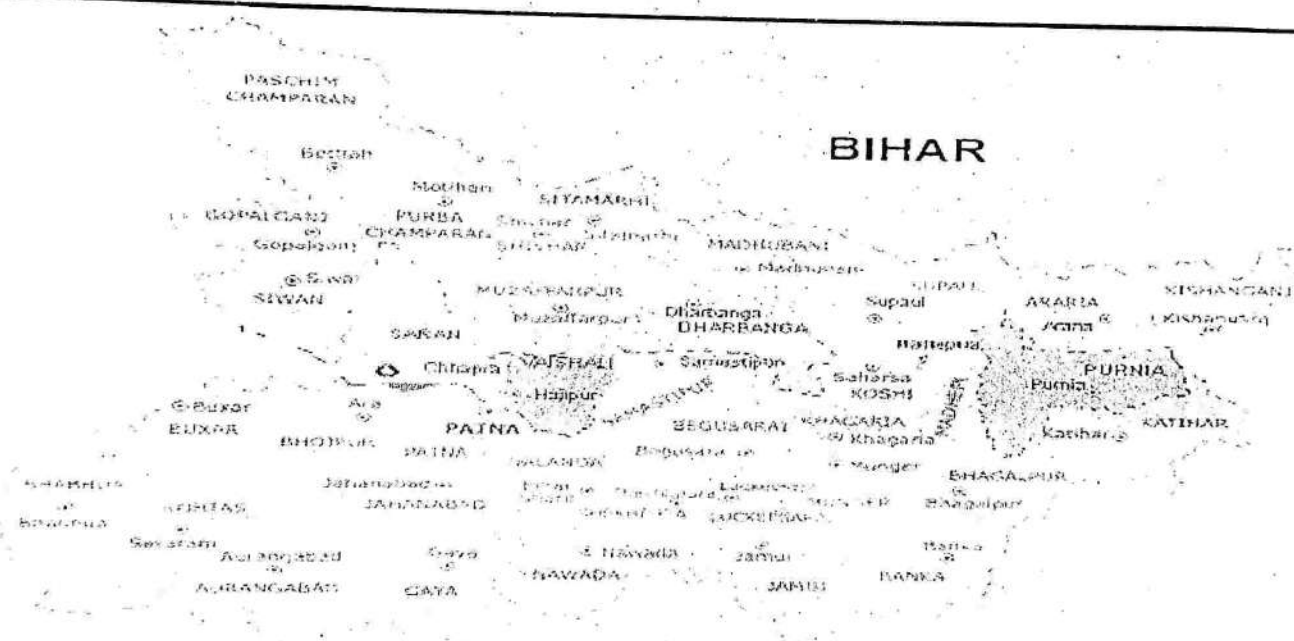
ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

2021-22

FDR

FLOOD DAMAGED REPORT




Restoration of Road From Hasanpur Panja Chowk To Hasanpur High MMGSY[SC]hool Via Bajrangbali Mandir Near River Ganga


ISTRICT	:-	Vaishali	
IVISION	:-	Mahnar	
LOCK	:-	Mahnar	
OTAL LENGTH OF ROAD	:-	0.600	KM
ART-A TOTAL COST OF INTIAL RECTIFICATION / ESTORATION	:-	2.02	Lac
OTAL COST OF PROJECT	:-	2.02	Lac


प्रतिवेदन

1. पथ का नाम :- Hasnapur Panna Check to Hasnapur High Mambery (S)
(S)hapur Panna Banwarigali Mandir Near River Ganga
2. पथ की लम्बाई :- 0.600 km
3. प्रखण्ड का नाम :- महनार
4. क्षतिग्रस्त की लम्बाई :- 0.080 km
5. प्राक्कलित राशि :- 2.02 लाख
6. वर्ष-2021 का बाढ़ एवं अतिवृष्टि :-

यह प्राक्कलन उक्त पथ के वर्ष-2021 में आई बाढ़/अतिवृष्टि के कारण
चैनेज..... 0.450 to 600m चैनेज
कुल 80 मीटर में पथ की हुई क्षति के अस्थायी मरम्मत/पुनर्स्थापन कार्य का है।
इस मूल पथ की कुल लम्बाई- 0.600 कि०मी० है। यह पथ पंचवर्षीय अनुरक्षण अवधि
के अन्दर/बाहर है। इस प्राक्कलन में कराये गये अस्थायी मोटरेबुल कार्य मद आदि
सम्मिलित है। क्षतिग्रस्त कार्य MIS पर अंकित है तथा इसके फोटोग्राफ लिये जा चुके
हैं, जो संलग्न है। कराये जाने वाले कार्य के दर वर्तमान चालू अनुसूचित दर पर
आधारित है। यह प्राक्कलन विभागीय पत्रांक-4555, पटना, दिनांक-05.11.2021 एवं
विभागीय पत्र संख्या-4589, दिनांक-13.11.2021 से प्राप्त निदेशानुसार तैयार किया गया
है। यह पत्र MIS के क्रमांक 73 पर अंकित है।


कनीय अभियंता


सहायक अभियंता


कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, महनार।

Inspection Report for Flood Damage Report

Date :

- 1 Name of PIUs : EE, Mahoran
- 2 Name of Block/ Road : Mahoran, Hasampur Panna Chowk to
- A. For Road : Hasampur Agha MGBSE (SE) school w/a
Bewangbali Mandir Near River Ganga,
- 1 Damage Location/Chainage : CH 430 to 602 mtr
- 2 Damage Length : 0.082 km
- 3 Nature of Damage : Base
- 4 Details of Restoration Works : Brick bats, Local sand (Temporary Restoration)
- i. Material being used in Restoration works : Brick Bats, Local sand 94.13 cum
- ii. Equipments/Tools being used in Restoration works : Rollers, Tanker, Gractor & Hammer
- iii. Procedure taken up in Restoration works : Brick Bats compacted with Roller
- iv. Restored Length : 80 mtr
- B For Bridge
- 1 Damage Location/Chainage : NA
- 2 Damage Length : NA
- 3 Nature of Damage : NA
- 4 Details of Restoration Works : NA
- i. Material being used in Restoration works : NA
- ii. Equipments/Tools being used in Restoration works : NA
- iii. Procedure taken up in Restoration works : NA
- iv. Restored Length : NA

Signature of JE / AE / EE : *[Signature]* 8/11/22
[Signature] 8/11/22
[Signature] 8/11/22

Signature
(Name of Inspector) : *[Signature]* 8/11/22

FLOOD DAMAGED REPORT

GENERAL ABSTRACT OF COST

Block:-- Mahnar District:- Vaishali

Length of Road:-- 0.600 KM

Name of Road:-- Restoration of Road From Hasanpur Panja Chowk To Hasanpur High MMGSY[SC]hool
Via Bajrangbali
Mandir Near River Ganga

SL. No.	Item of Work	Amount
A	TOTAL COST OF RECTIFICATION/ RESTORATION :	1.925 Lacs
B	Seigniorage 10% on material @ Rs 101.87 Per Cum 94.13 101.87 :	0.096 Lacs
TOTAL :		2.021 Lacs

Say Rs. 2.02 Lacs

[Signature]
Junior Engineer

[Signature]
28/01/22
Asstt. Engineer

[Signature]
8/1/22
Executive Engineer

As Per S.E. RWD (W) Circle Muz.
Letter No 1179 Dated 01/10/2021
Estimate has been verified by inspecting SE
E. E. RWD. (W) Division *Hazratpur* RWD

*Technically Sanctioned for Rs. 2.02 Lacs (Rs-Two
lacs two thousand) only (provisionally)*


[Signature]
15.2.22
Superintending Engineer
Rural Works Department
Work Circle, Muzaffarpur
[Signature]
15.1.22


GENERAL ABSTRACT OF COST FOR FDR

NAME OF ROAD : Restoration of Road From Hasanpur Panja Chowk To Hasanpur High MMGSY[SC]hool Via Bajrangballi
DISTRICT Vaishali
BLOCK Mahnar
DIVISION Mahnar
LENGTH OF ROAD (in Km) 0.600

Sl. No.	DESCRIPTION	Amount	1 % Labour Cess	12 % GST	GROSS AMOUNT (LAKHS)
	INITIAL RECTIFICATION /RESTORATION WORK				
1	BRICK BATS	170326.35	1703.264	20439.162	192468.778
TOTAL COST OF PROJECT IN LACS =		1.703	0.017	0.204	1.925


JE
RWD


AE
RWD


EE
RWD

FDR

Shedule XLV Form No. 134.

Hassanpur Panta Chowk to Hassanpur High School via Batnangbali Mandir

Near Sivas Dargah

Mahman

DIVISION

Mahman **SUB-DIVISION**

Measurement Book

875

Sch. XLV-Form No. 134

Particulars	Details of actual measurement				Contents of area	
	No.	L.	B.	D.		
Abstract of cost						
Item no. 01	Providing brick bats					
Including laying, compacting						
etc complete as specified and						
as directed by E.I.						
Qty m ³ 875						
Rate Rs 1803.48/m ³						
94.13 m ³ @ Rs 1803.48/m ³						
Rs 170326/-						
Add 1% L. cess						
Rs 1703/-						
Add 12% GST						
Rs 20439/-						
Total Rs 192468/-						
L (A)						
Add signature @ 10% on						

Material cost @ Rs 01.87/m ²	
=	94.13 x 01.87
=	9589/-
(B)	
Grand Total Rs (A) + (B)	
=	192468 + 9589
Gr. Total	= 2,02,057/-

AE	19/11/22	JE	14/11/22