

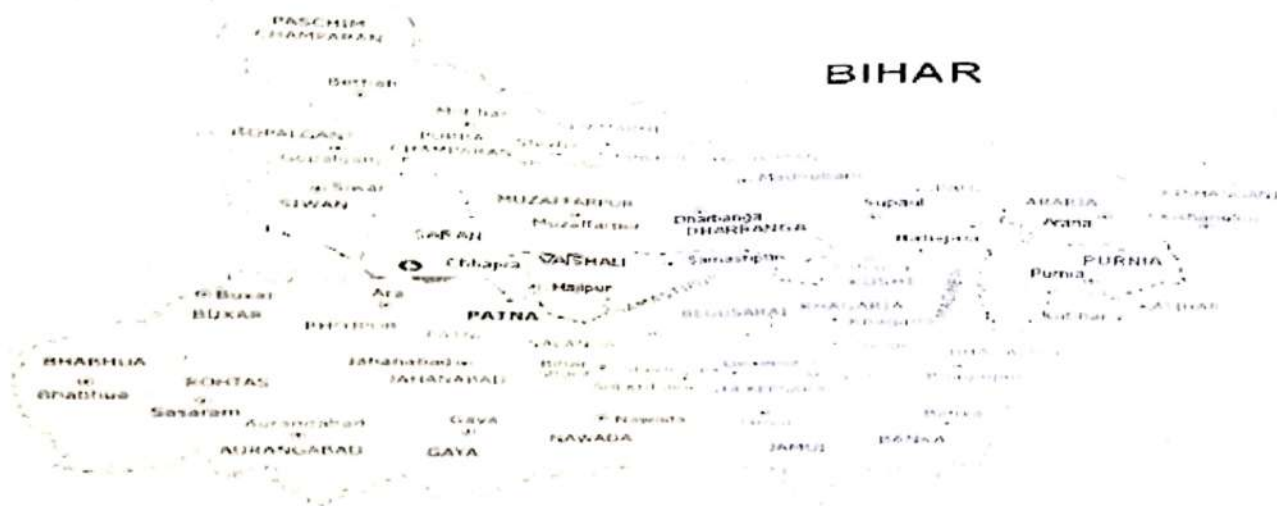


ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

FDR

PLAN HEAD FDR(2245) (2021-2022)



ESTIMATE FOR REPAIR OF ROAD BREACHES (DAMAGE BY FLOOD) FOR MOTARABLE WORK IN RAJU RAI KE GHAR SE DINA RAI KE GHAR TAK.

DISTRICT	:-	Saran	
DIVISION	:-	Sonpur	
BLOCK	:-	Sonpur	
TOTAL LENGTH OF ROAD	:-	0.700	KM
TOTAL COST OF CONSTRUCTION	:-	5.936	Lac
TOTAL COST OF PROJECT	:-	5.936	Lac

FDR(2021-2022)

प्रतिवेदन

पथ का नाम:-

Raju Rai Ke Ghar Se Dina Rai Ke Ghar Tak

पथ की लम्बाई:-

0.300 KM.

प्राक्कलित राशि:- 593551 रु

प्रखंड:-सोनपुर

जिला:-सारण

प्रस्तुत प्राक्कलन ग्रामीण कार्य विभाग कार्य प्रमंडल सोनपुर के प्रखंड अंतर्गत बाढ़ से क्षतिग्रस्त पथों के मोटेरेबुल कार्य प्राक्कलन कार्यपालक अभियंता, ग्रामीण कार्य विभाग कार्य प्रमंडल सोनपुर के निर्देशानुसार तैयार किया गया है।

विदित है कि माह अगस्त 2021 में अतिवृष्टि के कारण आयी बाढ़ के कारण निर्मित/निर्माणाधीन पथों में काफी पथों क्षति हुई है। अतिवृष्टि के कारण पथों में हुई कटाव से आवागमन प्रभावित हुआ है साथ ही अतिवृष्टि के कारण पथों में हुई कटाव से आवागमन प्रभावित हुआ है साथ ही वाहन का आवागमन आवश्यक है, एवं लोगों की कठिनाईयों को देखते हुए उच्चाधिकारी के निर्देशानुसार पथों को तत्काल मोटेरेबुल करने का निर्देश दिया गया है जिसमें पथ में CH-405 M से CH-500 M तक Brick Bats भरकर मोटेरेबुल किया गया है ताकि यातायात सुनिश्चित हो सके।

उपरोक्त आलोक में क्षतिग्रस्त पथों में तत्काल Brick Bats से भरकर वाहन का आवागमन चालू किया गया है।

इस प्रकार प्राक्कलन में Brick Bats भरने के साथ आवश्यक मदों का प्रावधान किया गया है।

प्राक्कलन वर्तमान अनुसूचित दर पर तैयार कर आवश्यक कारवाई हेतु समर्पित किया जाता है।


कनीय अभियंता


26/9/21
सहायक अभियंता


कार्यपालक अभियंता

FDR

GENERAL ABSTRACT OF COST

Block:- Sonpur

District:- Saran

Length of Road:- 0.700 KM

Name of Road:-

Estimate for Repair of Road Breaches (Damage By Flood) For Motarable Work in Raju Rai Ke Ghar Se Dina Rai Ke Ghar Tak.

SL. No.	Item of Work	Amount
A	TOTAL COST	5.936 Lacs
	TOTAL	5.936 Lacs


Junior Engineer



Asstt. Engineer


Executive Engineer


T/A for Rs. 5.936 lacs (Rs. five lacs, ninety three thousand and six hundred) only.

SE
RWD


23/11/21
EO


23/11/21
Superintending Engineer
Rural (Works) Dept.
Works Circle, Chapra

T/S for Rs. 5.936/- Lakhs. (Rupees five lakh
Ninety three thousand Six hundred) only.


Superintending Engineer
Rural (Works) Deptt.
Works Circle, Chapra

Name Of Road :-		Estimate for Repair of Road Breaches (Damage By Flood) For Motarable Work in Raju Rai Ke Ghar Se Dina Rai Ke Ghar Tak				Block :-	Sonpur	DISTRICT:-	Saran	LENGTH :-	0.500 KM	
SL.No.	SDB SL.NO	MORD Ref.No	Description		Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (in Rs.)
1	8.1.3.2 (iii)		BRICK BATS									
			Providing brick bats including spreading laying, Labour for dry graded jhama khoa folter under Brick Pitching or boulder pitching in slope or apron including light ramming etc. All complete job as per approved design specification and direction of E/I, including carriage cost of bricks.									
			Quantity As Per Annexure		Cum					258.000		
									Total Quantity=	258.00	2,300.58	5,93,551.00

[Signature]
AE
RWD

[Signature]
JE
RWD

[Signature]
EE
RWD

ANNEXTURE-1

Name Of Road :- Estimate for Repair of Road Breaches (Damage By Flood) For
Motarable Work in Raju Rai Ke Ghar Se Dina Rai Ke Ghar Tak.

Block:- Sonpur

No.	Description	Nos.	LENGTH (m)	WIDTH (m)	HEIGHT (m)	UNIT	QUANTITY
1	CH-390 M To 500 M	1	15.00	(4+5)/2	(.3+.5)/2	CUM	27.00 m3
2	"	1	40.00	(6+4)/2	(.5+1)/2	CUM	150.00 m3
3	"	1	40.00	(5+4)/2	(.6+.3)/2	CUM	81.00 m3
TOTAL QUANTITY =							258.00 m3

[Signature]
JE
RWD

[Signature]
6/9/21
AB
RWD

[Signature]
RWD

Inspection Report for Flood Damage Work

Date:.....

1. Name of PIUs : EERWD Sonpur
2. Name of Block/Road : Sonpur, Repair of road for motorable work in Rajurai ke Ghar se Dina rai ke Ghar Tak.
 - (A) For Road
1. Damage Location/Chainage : Chainage 390 to 500 m -
2. Damage Length : 0.095 km (95 metre)
3. Nature of Damage : Road cutting due to flood
4. Details of Restoration :
 - (i) Material being used in Restoration : Brick Bats -
 - (ii) Equipment/Tools being used in Restoration works : JCB, Tractor & Roller (tilting)
 - (iii) Procedure taken up in Restoration works : Brick Bats soling with
 - (iv) Restored Length : 0.095 km - compaction

(B) For Bridge

1. Damage Location/Chainage :
2. Damage Length :
3. Nature of Damage :
4. Details of Restoration :
 - (i) Material being used in Restoration :
 - (ii) Equipment/Tools being used in Restoration works :
 - (iii) Procedure taken up in Restoration works :
 - (iv) Restored Length :

Signature of JE/AE/EE  06/09/21

06/09/21

Signature  06/09/21
कार्यपालक अभियंता
ग्रामीण कार्य विभाग
(Name of Supervisor) उपर-2