



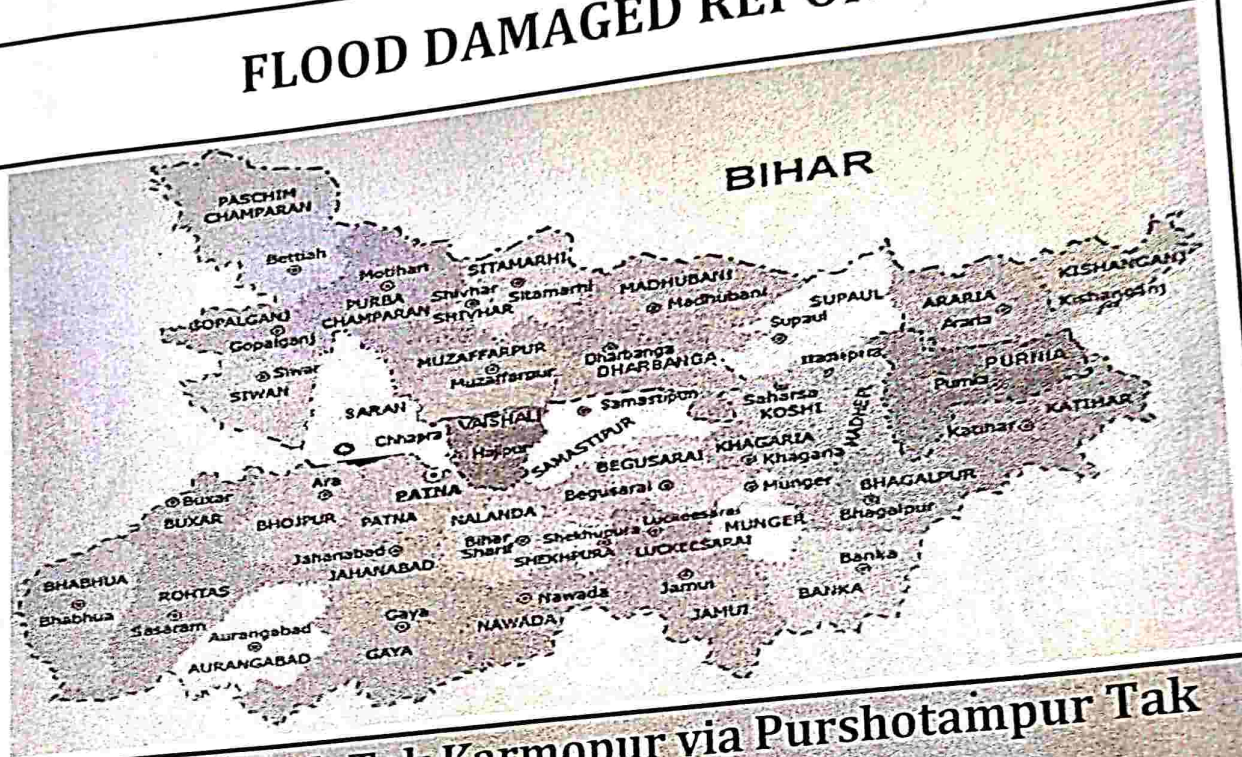
ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

2021-22

FDR

FLOOD DAMAGED REPORT



Jafrabad Deeh Tok Karmopur via Purshotampur Tak

DISTRICT	:-	Vaishali	
DIVISION	:-	Mahnar	
BLOCK	:-	Raghopur	
TOTAL LENGTH OF ROAD	:-	2.500	KM
PART-A TOTAL COST OF INTIAL RECTIFICATION IN SURFACE RENEUAL	:-	4.606 5.40	Lac
TOTAL COST OF PROJECT	:-	4.606 5.40	Lac

Inspection Report for Flood Damage Report

Date :

- 1 Name of PIUs : E. E. Mah nur
- 2 Name of Block/ Road : Ruythapur / Jafarabad deeh Tokto Karmapur
- A. For Road : Nig Ruythapur

- 1 Damage Location/Chainage : jafarabad deeh for chainage 200 to 250 m
- 2 Damage Length : 165.0 m
- 3 Nature of Damage : Surface, base, subgrade & embankment.
- 4 Details of Restoration Works : Brick bats 234.79 m
- i. Material being used in Restoration works : Brick bats, Satisfactory
- ii. Equipments/Tools being used in Restoration works : Tractor, JCB
- iii. Procedure taken up in Restoration works : only motorable work has been done.
- iv. Restored Length : 165.0 m

- 3 For Bridge : NA

- 1 Damage Location/Chainage :
- 2 Damage Length :
- 3 Nature of Damage :
- 4 Details of Restoration Works :
- Material being used in Restoration works :
- Equipments/Tools being used in Restoration works :
- Procedure taken up in Restoration works :
- Restored Length :


Signature of JE / AE / EE


Signature
(Name of Inspector)
Executive Engineer
R.W.D. Works Division
Hajipur

प्रतिवेदन

1. पथ का नाम :- जफराबाद डीए 200A ले 9मोर्पुर भागा पुल-पोतमपुर
2. पथ की लम्बाई :- 1.50 m
3. प्रखण्ड का नाम :- राकोपुर
4. क्षतिग्रस्त की लम्बाई :- 165.0 m
5. प्राक्कलित राशि :- ~~4.606 लाख~~ 5,03,999
6. वर्ष-2021 का बाढ़ एवं अतिवृष्टि :- 9/6,

यह प्राक्कलन उक्त पथ के वर्ष-2021 में आई बाढ़/अतिवृष्टि के कारण
चैनेज..... 1500 40 1530, 1580 40 1650 m, 1820 40 1885 चैनेज
कुल 165 मीटर में पथ की हुई क्षति के अस्थायी मरम्मत/पुनर्स्थापन कार्य का है।
इस मूल पथ की कुल लम्बाई- 1.50 कि०मी० है। यह पथ पंचवर्षीय अनुरक्षण अवधि
के अन्दर/बाहर है। इस प्राक्कलन में कराये गये अस्थायी मोटरेबुल कार्य मद आदि
सम्मिलित है। क्षतिग्रस्त कार्य MIS पर अंकित है तथा इसके फोटोग्राफ लिये जा चुके
हैं, जो संलग्न है। कराये जाने वाले कार्य के दर वर्तमान चालू अनुसूचित दर पर
आधारित है। यह प्राक्कलन विभागीय पत्रांक-4555, पटना, दिनांक-05.11.2021 एवं
विभागीय पत्र संख्या-4589, दिनांक-13.11.2021 से प्राप्त निदेशानुसार तैयार किया गया
है। यह 44 MIS के 931/35 पर अंकित है


कनीय अभियंता


सहायक अभियंता


कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, महनार।

FLOOD DAMAGED REPORT

GENERAL ABSTRACT OF COST

Block:- Raghopur District:- Valshall
Length of Road:- 2.500 KM
Name of Road:- Jafrabad Deeh Tok Karmopur via Purshotampur Tak

SL. No.	Item of Work	Amount
A	TOTAL COST OF CONSTRUCTION	: 503999.00 -4.606 Lacs
	TOTAL	: 4.606 Lacs

503999.00
say = 5.40 lacs

3/11/21
Junior Engineer

29/10/21
Asstt. Engineer

29/10/21
Executive Engineer

As Per S.E. MUZAFFARPUR Circle Muz.
Letter No 1179 Dated 01/10/2021
Estimate has been verified by inspecting
E. E. RWD. (W) Division - Hapur

SE
RWD

Technically Approved for Rs. 5.40 lacs (Rs. Five
lacs forty thousand) only

18.12.21
Superintending Engineer
Rural Works Department
Work Circle, Muzaffarpur

18.12.21

GENERAL ABSTRACT OF COST FOR FDR

NAME OF ROAD : Jafrabad Deeh Tok Karmopur via Purshotampur Tak

DISTRICT Vaishali

BLOCK Raghopur

DIVISION Mahnar

LENGTH OF ROAD (in Km) 2.500

Sl. No.	DESCRIPTION	Amount	1 % Labour Cess	12 % GST	1% Labour Cess & 12% GST AMOUNT (LAKHS)
	INITIAL RECTIFICATION INCLUDING SURFACE RENEWAL				
1	BRICK BATS <i>Add Seigniorage fee 10% @ 101.97X 234.79 = Rs 23918</i>	<i>424850</i> 4.076	<i>42.49</i> 0.041	<i>50982</i> 0.489	4.606
	SUB TOTAL OF INTIAL RECTIFICATION INDLUCDING SURFACE RENEWAL	4.076	0.041	0.489	4.606
TOTAL COST OF PROJECT IN LACS =		4.076	0.041	0.489	4.606

503999.00
503999.00
503999.00

21
31/11/21
JE
RWD

Amal
29/11/21
AE
RWD

Dr
29/11/21
EE
RWD

Sl No.	SDB SL NO	MORD Ref No	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (In Rs.)
1	8.1.3.2 (iii)	OLD SOR	BRICK BATS Providing brick bats including spreading laying hand packing and compacting with C.I. Hammer in layers not exceeding 75 mm thick including cost of light barriers, danger signals, chowkidar, taxes, royalty etc. all complete job as per specification and direction of E/I including carriage cost of bricks.								
			Qty Vide M.B No-815, Page No-01, Dated - 22/10/2021	Cum					118.080		
			Qty Vide M.B No-815, Page No-02, Dated - 26/10/2022	Cum					78.920		
			Qty Vide M.B No-815, Page No-03, Dated - 28/10/2023	Cum					37.790		
								Total =	234.790	1,736.07	4,07,612.00
								A) SUB TOTAL OF CRUST =			4,07,612.00
								TOTAL COST OF PAVEMENT IN RS. (A) =			4,07,612.00

424850.00
424850.00
424850.00

29/11/24

29/11/24
PE

31/11/24
P.E.