




# ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

## DETAILED PROJECT REPORT FOR FDR

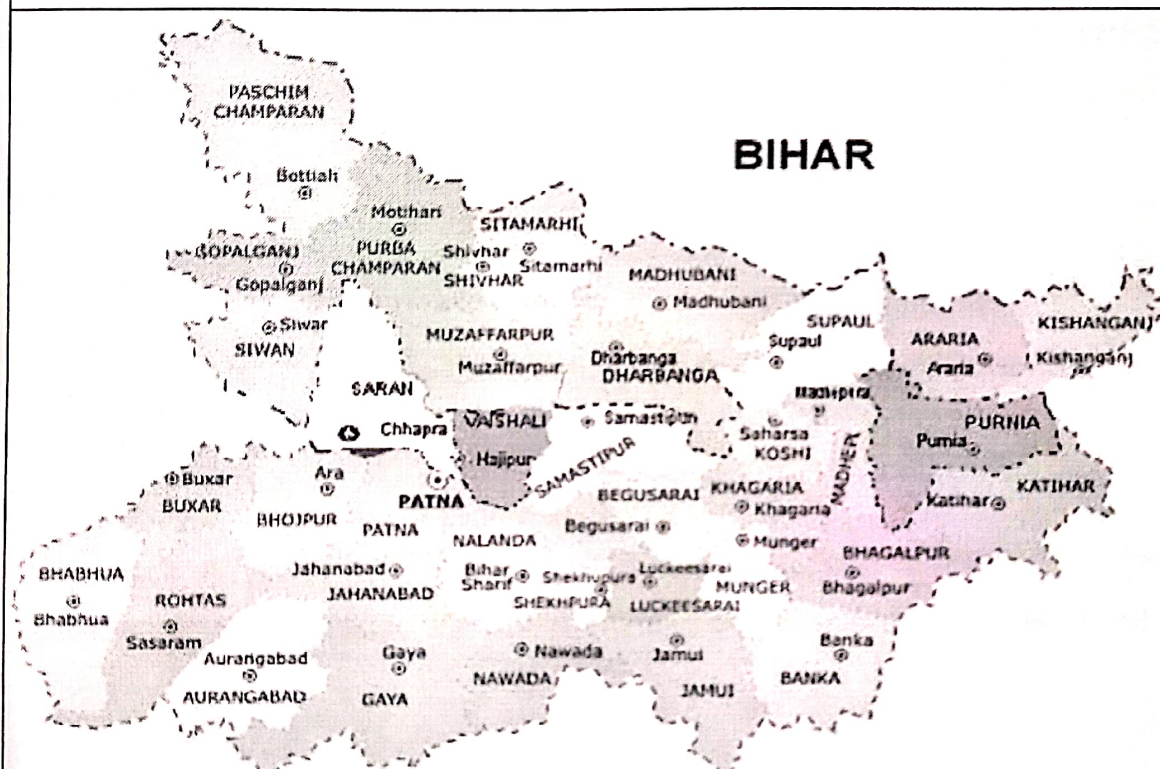

Name of the Road :-

Deri Sherna Path me Sahwajpur Sahi Chawk Tak to  
Hichra Muslim Tola REO Path Tak via Sahwajpur  
Chaulbul Shahi ke Tola Hote Hue

|                      |                  |                                      |     |
|----------------------|------------------|--------------------------------------|-----|
| DISTRICT             | Muzaffarpur      |                                      |     |
| DIVISION             | Muzaffarpur West |                                      |     |
| BLOCK                | Kanti            |                                      |     |
| TOTAL LENGTH OF ROAD | :                | 1.100                                | KM  |
| CONSTRUCTION COST    | :                | <del>4.506</del><br><del>4.489</del> | Lac |

Submitted By :-

Executive Engineer

RWD Work Division, Muzaffarpur West

4.509

## प्रतिवेदन


कार्य का नाम:- Deni sherna path me saharapoor sahi  
chook tak Hichra muslim पथ में अप्रत्याशित बाढ़/अतिवृष्टि से क्षतिग्रस्त पथ में  
यातायात चालू करने हेतु आपातकालीन मरम्मत कार्य।

प्रखण्ड- Kanti  
वित्तीय वर्ष - 2021-22  
प्राक्कलित राशि - Rs. 4.506 laes  
4.509

प्रस्तुत प्राक्कलन जिसकी प्राक्कलित राशि 4.509 है, Deni sherna path me saharapoor  
chook tak Hichra muslim प्रखण्ड- Kanti में यातायात बहाली हेतु आपातकालिन मरम्मत के  
लिए तैयार किया गया है।

अभियंता प्रमुख, ग्रामीण कार्य विभाग, बिहार पटना के पत्रांक 4589 दिनांक 13/11/21 द्वारा  
दिये गये निर्देश के आलोक में उक्त पथ के क्षतिग्रस्त पथ में Brick Bats & Local Sand भरकर पथ को चालू  
करने का प्रावधान किया गया है। प्राक्कलन वर्तमान चलू अनुसूचित दर पर तैयार किया गया है। इसकी  
घटनोत्तर स्वीकृति अपेक्षित है। पथ की ड्रॉइंग MDS में है। MDS की ड्रॉइंग संख्या है MIS का SLNO-1970

  
कनीय अभियंता

  
सहायक अभियंता

  
कार्यपालक अभियंता  
ग्रामीण कार्य विभाग  
कार्य प्रमंडल:-

## Inspection Report for Flood Damage Work

Date:-

1 Name of PIUs :- *EE PWD Muz West*

2 Name of Block/Road :- *Kanti*

### (A) For Road:

1. Damage Location/Chainage :-
2. Damage Length :- *150 m*
3. Nature of Damage :- *Heavy rain & Flood*
4. Details of Restoration Works :-  
(i) Material being used in Restoration works:- *24.79m<sup>3</sup> 28.31m<sup>3</sup> 117.40m<sup>3</sup> 4114 nos 108ms*  
(ii) Equipment's/Tools being used in Restoration works:- *Sand, Rish, Brick Bats, sand bags, bomb*  
(iii) Procedure taken up in Restoration works:- *Tractor Puffer, Roller*  
(iv) Restored Length :- *150 m*

### (B) For Bridge:

1. Damage Location/Chainage :-
2. Damage Length :-
3. Nature of Damage :-
4. Details of Restoration Works :-  
(i) Material being used in Restoration works:-
- (ii) Equipment's/Tools being used in Restoration works:-
- (iii) Procedure taken up in Restoration works:-
- (iv) Restored Length :-

*M/A*

*[Signature]*  
Signature of JE/AE/EE

*Bol*  
*05/11/2021*  
*AT*

*[Signature]*  
Signature

(Name of Inspection)

# **GENERAL ABSTRACT**

Name of Road Deri Sherna Path me Sahwajpur Sahi Chawk Tak to Hichra Muslim Tola REO Path Tak via  
 District Sahwajpur Chaulbul Shahi ke Tola Hote Hue  
 Block Muzaffarpur  
 Division Kanti  
 Length of Road (in Km) Muzaffarpur West 1.100 Km

| Sl. No. | DESCRIPTION     | AMOUNT (LAKHS) |
|---------|-----------------|----------------|
| 1       | Sand Filling    | 0.137          |
| 2       | Brick Bats      | 2.528          |
| 3       | Rubbish         | 0.257          |
| 4       | Sand bag        | 1.501          |
| 5       | H.P.            | 0.000          |
| 6       | bamboo piles    | 0.065          |
|         | SUB TOTAL       | 4.489          |
|         | GRAND SUB TOTAL | 4.489          |

0.140 ✓  
 2.423 ✓  
 0.268 ✓  
 1.618 ✓  
 1.619 ✓  
 0.058 ✓  
 4.506 ✓  
 4.506 ✓

*[Signature]*  
 JE  
 RWD

*[Signature]*  
 AE  
 RWD

*[Signature]*  
 EE  
 RWD

As Per S.E. RWD (W) Circle Muz.  
 Letter No 1179 Dated 01/10/2021  
 Estimate has been verified by inspecting  
 E. E. RWD. (W) Division *Makela*

*Technically Sanctioned for Rs. 4.509 lacs  
 (Rs. Four lacs fifty thousand nine hundred)  
 only (provisionally)*

*[Signature]*  
 28.12.21

Superintending Engineer  
 Rural Works Department  
 Work Circle, Muzaffarpur

*[Signature]*  
 28.12.21