



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

ESTIMATE FOR FLOOD DAMAGED REPAIR



Name of the Road :-

Pratap Pur Sadai Bigh 9
T04 ~~Pratap Pur Sadai Bigha (Pratap Pur)~~

DISTRICT	:	Lakhisarai	
DIVISION	:	Lakhisarai	
BLOCK	:	Barahiya	
TOTAL LENGTH OF ROAD	:	8 4.060 3.25	KM
PART-A TOTAL COST OF RESTORATION	:	12.155	Lac
TOTAL COST OF PROJECT	:	12.155	Lac

Submitted By:

Executive Engineer

RURAL WORKS DIVISION

Lakhisarai

स्थल निरीक्षण प्रतिवेदन

वर्ष 2021-22 के बाढ़ में क्षतिग्रस्त पथों में कराये गए मोटरेबुल कार्य की जाँच।

पथ का नाम :- T04_ प्रतापपुर से सदायबिगहा

पथ की लम्बाई :- 3.250 कि०मी०

प्राक्कलित राशि :- 12.155/- लाख

अधीक्षण अभियंता, ग्रामीण कार्य विभाग, कार्य अंचल, मुंगेर के पत्रांक 1162 दिनांक 16.11.2021 द्वारा प्राप्त निदेश के अनुपालन में आज दिनांक 21.11.2021 को ग्रामीण कार्य विभाग, कार्य प्रमंडल, लखीसराय के अधीन बाढ़ से क्षतिग्रस्त पथ का निरीक्षण सहायक अभियंता श्री लौडिक प्रसाद राय के साथ वर्ष 2021-22 में बाढ़ में क्षतिग्रस्त पथ का कराये गए मोटरेबुल कार्य का स्थल निरीक्षण किया। जाँच के समय कार्य प्रखंडल, लखीसराय के सहायक अभियंता श्री संदीप कुमार एवं श्री ब्रजेश कुमार सिंह, कनीय अभियंता श्री श्याम सुन्दर प्रसाद एवं श्री रंजीत कुमार उपस्थित रहे।


उक्त पथ के निरीक्षण के दौरान पाया गया कि पथ में बने बड़े गड्ढों में Moorum से भरकर उसके उपर G.S.B. (Gr.II) (जगह-जगह 200mm एवं 150mm मुटाई में) डालकर सम्पीडन का कार्य कराया गया है, जिसका शत प्रतिशत जाँच किया गया है, एवं उक्त पथ के प्राक्कलन एवं मापीपुस्त में दर्ज की गई मापी को कार्य स्थल के अनुसार पाया।



सहायक अभियंता

ग्रा०का०वि०, कार्य प्रमं०

खड़गपुर-तारापुर



कार्यपालक अभियंता

ग्रा०का०वि०, कार्य प्रमं०

खड़गपुर-तारापुर

ESTIMATE FOR FLOOD DAMAGED REPAIR

NAME OF ROAD :

T04 ~~Sadai Bigha~~ ^{Pratap pur Sadai Bigha} (Pratap pur)

DISTRICT

Lakhisarai

BLOCK

Barahiya

DIVISION

Lakhisarai

LENGTH OF ROAD (in Km)

4.060

CD STRUCTURES

Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
PART-A	RESTORATION COST	
1	Type B (First Class) Bedding	5.733
2	GSB GR-II	4.795
	SUB TOTAL OF Restoration	10.528
	LABOUR CESS 1% of cost	0.105
	GST 12 % of cost	1.263
	SEIGNORAGE FEE @ 10 % on Minor Mines	0.258
	TOTAL OF Restoration	12.155
	TOTAL COST OF PROJECT IN LACS =	12.155

Deduct Contractors profit 9.1% = - 1.106 Lakhs

Total = Rs. 11.049 Lakhs


28/10/2021
JE
RWD


28.10.21
AE
RWD


28-10-21
RE
RWD


10/11/2021
RWD

T.S Amount

Construction Cost: Rs. 12.155 lakh


Deduct Contractor Profit 9.1% = Rs. 1.106 lakh

Total = Rs. 11.049 lakh

Ref. E.E. Letter No. 548 dt. 18.4.2022

Technically Sanctioned for Rs. 11.049 lakh

(Rupees Eleven lakh Four
thousand nine hundred Only.
for construction work & 5 Years Maintenance

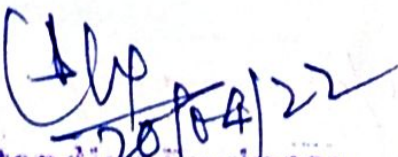
20/04/22
Superintending Engineer
Rural Works Department
Works Circle, Munger
20/04/2022



Top to Street Bridge

Report No. 134

R.W.D (W) Lathiswal DIVISION

Barfiya

SUB-DIVISION

Date - 11-10-2021

MRA SURVEILLANCE BOOK

M.B.MO -

195

[illegible]