


RURAL WORKS DEPARTMENT GOVT. OF BIHAR

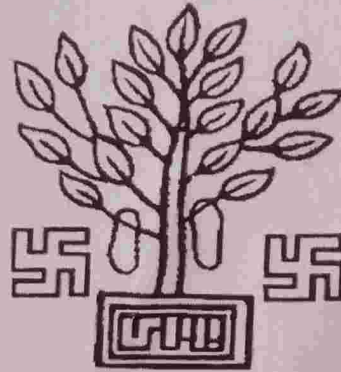

**Name of Work:- Madhuban Basha Paschim ke Gram Narharpur Ke Dhobi
Ghat Par Pul Nirman Karya.
Block:-Bajpatti.**

F.D.R

Rs.517221.00-

343697=00

Year-2021-22.

Name of Circle:- R.W.D. Works Circle, Sitamarhi.

Name of Division:- R.W.D. Works Division, Pupri.

बाढ़ क्षतिग्रस्त पथों का अन्तर प्रमंडलीय जाँच प्रतिवेदन हेतु प्रपत्र

1	निरीक्षी पदाधिकारी का नाम एवं पदनाम:-	ई0 विनोद कुमार साह, कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, सीतामढ़ी।
2	निरीक्षण की तिथि:-	22-12-2021
3	पथ का नाम (शीर्ष के साथ)	Madhuban Basha paschim ke Gram Narkarpur ke Dhobighat Par Pul Nirman kary.
4	पथ की लम्बाई	0.400
5	कार्य प्रमंडल का नाम	ग्रामीण कार्य विभाग, कार्य प्रमंडल, पुपरी।
6	प्रखंड का नाम	बाजपट्टी।
7	पथ की स्थिति	(Completed/Ongoing)
8	पथ अनुरक्षण अवधि में हैं	(Yes/No)
9	क्षतिग्रस्त भाग की लम्बाई	
10	क्षतिग्रस्त भाग में कराये गये कार्य का विवरणी (लम्बाई x ऊँचाई x गहराई)	All Mesurment are attached in estimate Qty of Brick Bats :- 176.1259 Qty of Rubbish:- 44.03148 Total Qty :- 220.1574m³ Entered in MB No:- 2208 Page No:- 103
11	अस्थायी पुर्नस्थापन में किस-किस सामग्रीयों को उपयोग किया गया है। उसकी विवरणी	Brick Bats & Rubbish
12	अभ्युक्ति	


 22.12.2021
 निरीक्षी पदाधिकारी का हस्ताक्षर
 पदनाम सहित

DETAILED ESTIMATE FOR F.D.R

General Abstract of Cost

Name of Road:-Madhuban Basha Paschim ke Gram Narharpur Ke
Dhobi Ghat Par Pul Nirman Karya.

Length of Approach:-0.400 Km

Block:-Bajpatti

District:-Sitamarhi

S. No.	Particulars	Total Cost (in Lakh)
1	Total Cost for Motorable Roads	439158.00
2	Labour cess @1%	4391.58
3	GST @12%	52698.96
4	Seigniorage Fee @ 10%	20972.19
5	Total Cost of Road Repair	517220.73

Say Rs. ~~517221.00~~

343697=00

[Signature]
5-11-21

JE

[Signature]
5-11-21

AE

[Signature]
5-11-21

अभियन्ता-प्रमुख ग्रामीण कार्य विभाग के पत्रांक-4849

दिनांक-07/12/2021 के आदेशानुसार प्रशासनिक

स्वीकृति के प्रत्याशा में औपबंधित तकनीकी स्वीकृति प्रदान

की जा रही है। प्रशासनिक स्वीकृति प्राप्त होने के उपरान्त

पुनः तकनीकी स्वीकृति प्रदान की जायेगी। औपबंधित तकनीकी

स्वीकृति रुपये.....343,697.20 (Three lac forty three thousand six hundred Ninety Seven)

की प्रदान की जाती है।

[Signature]
22/4/22

अधीक्षण अभियन्ता
ग्रामीण कार्य विभाग
कार्य अंचल, सीतामढ़ी

Name of Road:-Madhuban Basha Paschim ke Gram Narharpur Ke Dhobi Ghat Par Pul
Nirman Karya.

Schedule of Quantity

Sl. No.	Description of Item	Qty	Unit	Rate	Amount
1	Sand Filling in Foundation Trenches as per Drawing & Technical Specification.	0.00	Cum	488.11	0.00
2	Providing and laying of Brick Bat obtained from Chimney with machanical means with all spreading, grading to required slope and compacted at OMC to achieve required density with all complete as per the direction of engineer in charge.	220.1574			0.00
	Less 20% for Voids	44.03148		1733=25	3052.92=00
		176.1259	Cum	2105.01	370746.8229
3	Single bamboo paiasiding/ walling of whole 2nd class bamboo (Jati or Bethua) 75mm dia and closely packed & driven including fitting fixing with half bamboo kamis horizontally in three rows with cane or tying with wire complete and Struts 1.5m apart longitudinally and providing brush wood as per drawing and technical specification clause 1302.5	0.00	m	140.4	0.00
4	Providing, Laying and placing empty cement bag filled with local sand including stiching with sutall etc. do.....do.....all complete job as per specification and direction of E/I. (including Royalty and all Taxes)	0.00	no.	9.63	0.00
5	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 1000) as per design in Single Row with old available pipe	0.00	m	3400.00	0.00
6	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 600) as per design in Single Row with old available pipe	0.00	m	850.00	0.00
7	Providing Quarry Material Rabbish for filling the voids in bricks batsdo.....all complete job as per specification and direction of E/I.				
	Taking 20% of Brick Qty for Rabbish	44.03148	Cum	873=01	38438=00
				1553.68	68410.82985

Total 439157.65
Say 439158.00

343637=00

[Signature]
5-11-21

JE

[Signature]
5-11-21

AE

[Signature]
5-11-21

EE

Details of Measurement of ditches filled by brick bats and rabbish
Name of Road:-Madhuban Basha Paschim ke Gram Narharpur Ke Dhobi Ghat Par Pul Nirman
Karya.

CH 0 M	Nos.	L	W		H		VOLUME
	1	15.00	5.260	Av	0.600	Av	47.3400
	1	7.00	4.400		0.690		21.2520
	1	20.00	2.900	Av	0.430	Av	24.9400
	1	2.00	1.800		0.330	Av	1.1880
	1	5.50	3.000		0.350	Av	5.7750
	1	12.50	2.500		0.380		11.8750
	1	2.50	2.000		0.320		1.6000
	1	6.80	2.850	Av	0.390		7.5582
	1	15.00	2.650	Av	0.440	Av	17.4900
	1	4.00	2.000		0.280		2.2400
	1	8.00	2.650	Av	0.410	Av	8.6920
CH 400 M	1	13.60	2.200		0.410	Av	12.2672
	1	16.00	3.500		0.440		24.6400
	1	37.00	3.000		0.300	Av	33.3000
Total (in Cum)							220.1574
Laying Hume Pipe of 1000 mm dia		0	0		0		0.00
Laying Hume Pipe of 600 mm dia		0	0		0		0.00
Cement Bage							

JE

AE

EE