


RURAL WORKS DEPARTMENT GOVT. OF BIHAR

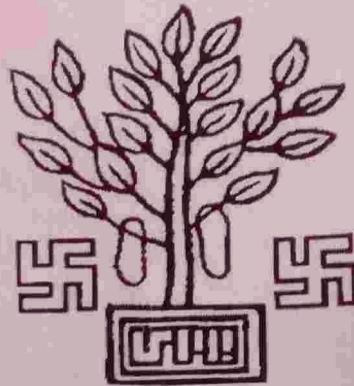

**Name of Work:- L072 Bajitpur PMGSY Road House of Satan Raut to
Jhakra Jabra.**

Block:-Bajpatti.

F.D.R

Rs.174400.00- 115894

Year-2021-22.

Name of Circle:- R.W.D. Works Circle, Sitamarhi.

Name of Division:- R.W.D. Works Division, Pupri.

DETAILED ESTIMATE FOR F.D.R

General Abstract of Cost

Name of Road:-L072 Bajitpur PMGSY Road House of Satan Raut to Jhakra Jabra.

Length of Road:-2.050 Km

Block:-Bajpatti

District:-Sitamarhi

S. No.	Particulars	Total Cost (in Lakh)
1	Total Cost for Motorable Roads	148078.00
2	Labour cess @1%	1480.78
3	GST @12%	17769.36
4	Seigniorage Fee @ 10%	7071.53
5	Total Cost of Road Repair	174399.67

Say Rs.

174400.00
115894.00

P. Praveen
5-11-21
JE

R. K. Singh
5-11-21
AE

EE
5-11-21

अभियन्ता-प्रमुख ग्रामीण कार्य विभाग के पत्रांक-4849 दिनांक-07/12/2021 के आदेशानुसार प्रशासनिक स्वीकृति के प्रत्याशा में औपबंधित तकनीकी स्वीकृति प्रदान की जा रही है। प्रशासनिक स्वीकृति प्राप्त होने के उपरान्त पुनः तकनीकी स्वीकृति प्रदान की जायेगी। औपबंधित तकनीकी स्वीकृति रुपये.....115894.00.....की प्रदान की जाती है।

रकम पात्र है और आठ सौ
चौरानवे)
22/4/22

अधीक्षण अभियन्ता
ग्रामीण कार्य विभाग
कार्य अंचल, सीतामढ़ी

Schedule of Quantity

Name of Road:-L072 Bajitpur PMGSY Road House of Satan Raut to Jhakra Jabra.

Sl. No.	Description of Item	Qty	Unit	Rate	Amount
1	Sand Filling in Foundation Trenches as per Drawing & Technical Specification.	0.00	Cum	488.11	0.00
2	Providing and laying of Brick Bat obtained from Chimney with machanical means with all spreading, grading to required slope and compacted at OMC to achieve required density with all complete as per the direction of engineer in charge.	74.2340			0.00
	Less 20% for Voids	14.8468			
		59.3872	Cum	2105.01	125010.6499
3	Single bamboo paliasiding/ walling of whole 2nd class bamboo (Jati or Bethua) 75mm dia and closely packed & driven including fitting fixing with half bamboo kamis horizontally in three rows with cane or tying with wire complete and Struts 1.5m apart longitudinally and providing brush wood as per drawing and technical specification clause 1302.5	0.00	m	140.4	0.00
4	Providing, Laying and placing empty cement bag filled with local sand including stitching with sutall etc. do.....do.....all complete job as per specification and direction of E/I. (including Royalty and all Taxes)	0.00	no.	9.63	0.00
5	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 1000) as per design in Single Row with old available pipe	0.00	m	3400.00	0.00
6	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 600) as per design in Single Row with old available pipe	0.00	m	850.00	0.00
7	Providing Quarry Material Rabbish for filling the voids in bricks batsdo.....all complete job as per specification and diretion of E/I.				
	Taking 20% of Brick Qty for Rabbish	14.8468	Cum	873.01	12961
				1553.68	23067.17622

Total 148077.83

Say 148078.00

115894.00

[Signature]
JE
5-11-21

[Signature]
AE
5-11-21

[Signature]
EE
5-11-21

Details of Measurement of ditches filled by brick bats and rabbish

Name of Road:-L072 Bajitpur PMGSY Road House of Satan Raut to Jhakra Jabra.

	Nos.	L	W		H		VOLUME
CH 300 M	1	69.00	3.420	Av	0.300	Av	70.7940
CH 400 M	1	5.00	1.000		0.260	Av	1.3000
	1	3.00	1.000		0.210	Av	0.6300
	1	1.00	1.000		0.150		0.1500
	1	1.00	1.000		0.180		0.1800
CH 500 M	1	1.00	2.000		0.210	Av	0.4200
CH 600 M	1	2.00	1.000		0.380	Av	0.7600
		Total (in Cum)					74.2340
Laying Hume Pipe of 1000 mm dia		0	0		0		0.00
Laying Hume Pipe of 600 mm dia		0	0		0		0.00
Cement Bage							

[Signature]
5-11-21

JE


[Signature]
5-11-21

AE

[Signature]
5-11-21

बाढ़ क्षतिग्रस्त पथों का अन्तर प्रमंडलीय जाँच प्रतिवेदन हेतु प्रपत्र

1	निरीक्षी पदाधिकारी का नाम एवं पदनाम:-	ई0 विनोद कुमार साह, कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, सीतामढ़ी।
2	निरीक्षण की तिथि:-	22-12-2021
3	पथ का नाम (शीर्ष के साथ)	1072 Bajitpur PMHSY Road House of Satam Raut to Jhakra Talera
4	पथ की लम्बाई	2.050 km
5	कार्य प्रमंडल का नाम	ग्रामीण कार्य विभाग, कार्य प्रमंडल, पुपरी।
6	प्रखंड का नाम	बाजपट्टी।
7	पथ की स्थिति	(Completed/Ongoing)
8	पथ अनुरक्षण अवधि में हैं	(Yes/No)
9	क्षतिग्रस्त भाग की लम्बाई	82 m
10	क्षतिग्रस्त भाग में कराये गये कार्य का विवरणी (लम्बाई x ऊँचाई x गहराई)	<p>All Mesurment are attached in estimate</p> <p>Qty of Brick Bats :- 59.3872 m³</p> <p>Qty of Rubbish:- 14.8468 m³</p> <p>Total Qty :- 74.2340 m³</p> <p>Entered in MB No:- 2715</p> <p>Page No:- 1403</p>
11	अस्थायी पुर्नस्थापन में किस-किस सामग्रीयों को उपयोग किया गया है। उसकी विवरणी	Brick Bats & Rubbish
12	अभ्युक्ति	


 22-12-2021
 निरीक्षी पदाधिकारी का हस्ताक्षर
 पदनाम सहित