



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

PLAN HEAD- FDR YEAR 2021-22

DISTRICT :- WEST CHAMPARAN

BLOCK :- ~~Lauriya~~ Bagaha-I

Estimate for Repair of Road breaches
(Damaged by Flood) for Motorability in
Construction of H.L.R.C.C Bridge over Harha
River at Khajuri village in Khajuri To Pakki
Kachhi Road Under Bagaha Block.

LENGTH OF ROAD (in Km)- 0.058 KM

ESTIMATED COST -	13.894	Lacs
------------------	--------	------

SUBMITTED BY:
EXECUTIVE ENGINEER,
RWD WORKS DIVISION,
BAGAHA-1

TECHNICAL REPORT

Name of Road :- H.L.R.C.C Bridge over Harha River at Khajuri village in Khajuri to Pakki Kachhi Road Under Bagaha Block

Name of Block:- Bagaha-1

Name of Division:- Bagaha-1

Name of District:- West Champaran

Estimated Cost:- Rs. 13.894 Lacs


This Estimate is prepared for Restoration of H.L.R.C.C Bridge over Harha River at Khajuri village in Khajuri to Pakki Kachhi Road Under Bagaha Block under FDR as per the instruction of Secretary, Rural Works Department, Patna vide, 23 -60 /2020-1937 , Patna, Date- 07.07.2021. Road remains effected from flood about 01 to 02 weeks and heavy amount of water passed through it.

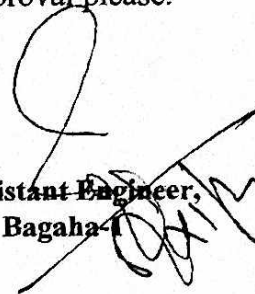
Honorable Chief Minister/Secretary, Rural Works Department, Bihar, Patna/D.M., West Champaran, Bettiah/Concerned MP/MLA has instructed to maintain the traffic and movement of public etc. at the earliest so that public of this area may get connected and for the same Departmental instruction has also been issued to fill the gap made by flooded immediately.

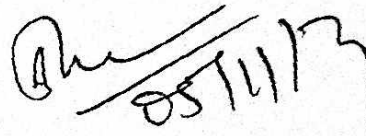
The area surrounding is submerged in water and hence provision of Bricks Bats/ Earth Work/Sand Filling/ Bamboo Piling/Hume Pipe has been made to maintain the road damage due to flood/heavy rainfall as per availability of material from available place by tractor. Presently there is no Contractor is employed for Construction and Maintenance of this road hence the work has been carried out Departmentally and due to this, provision of Contractor profit is not mentioned in the estimate.

In view of above, it is requested to approve the estimate amounting to Rs. 13.894 Lacs please.

Submitted for Administrative Approval please.


05-11-2021
Junior Engineer,
Bagaha-1


Assistant Engineer,
Bagaha-1


Executive Engineer
R.W.D.(W) Division, Bagaha-1

GENERAL ABSTRACT OF COST

ESTIMATE FOR REPAIR OF ROAD BREACHES (DAMAGED BY FLOOD) FOR
MOTORIBILITY IN CONSTRUCTION OF H.L.R.C.C BRIDGE OVER HARHA
RIVER AT KHAJURI VILLAGE IN KHAJURI TO PAKKI KACHHI ROAD UNDER
BAGAHA BLOCK.

DISTRICT - WEST CHAMPARAN

DIVISION - BAGAHA-1

BLOCK - Lauriya

LENGTH OF ROAD (in Km)- 0.058 KM

SL. No.	Item of Work	Amount
1	EARTH WORK	0.000 Lacs
2	BRICK BATS	11.842 Lacs
3	SAND BAGS	0.263 Lacs
4	BAMBOOS PILING AND RUNNER	0.000 Lacs
5	HUME PIPE	0.000 Lacs
	COST OF RESTORATION	12.105 Lacs
	ADD SEIGNIORAGE FEE @ 10% OF MATERIAL COST	0.215 Lacs
	ADD LABOUR CESS @ 1%	0.121 Lacs
	ADD GST @ 12%	1.453 Lacs
	TOTAL COST OF RESTORATION OF ROAD	13.894 Lacs

San
05-11-2021

Junior Engineer

Asstt. Engineer

Executive Engineer

Sanctioned
Technically approved for Rs 1389400 = 00 (thirteen
Lac eighty nine thousand four hundred only)

San
25/11/21

S.E.

R.W.D. (W) Circle
Bettiah

Name of Work:-

Estimate for Repair of Road breaches (Damaged by Flood) for Motorability in Construction of
H.L.R.C.C Bridge over Harha River at Khajuri village in Khajuri To Pakki Kachhi Road Under
Bagaha Block.

Road - FDR

Item No.	Name of Item	unit	No	Length	Width	Height	Qty.	Rate	Amount
	Material & Labour for sand filling Pitching in slope or apron including light ramming etc. all complete as per approved design, specification and direction of E/I.	cum	As Per Appendix I				0	443.80	0
	Providing and Labour for laying dry graded Brick Bats by Road Roller in proper grade camber and super elevation dry and wet rolling including cost of running charge of roller diver and khalasi etc. all complete as per approved design, specification and direction of E/I.	cum	As Per Appendix II				578.16	2048.30	1184245.13
	Providing, Filling Sand Bag, Stitching and Placing etc. all complete as per specification and direction of E/I.	Nos.					1208	21.75	26274.00
	Providing and Labour for cutting 62 mm to 75 dia Bamboo piles to size and making shoes and driving etc. complete job as per specification and direction of E/I.	RM					0.00	47.61	0.00
	Providing and Labour for fitting & fixing 62 mm to 75 dia Bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I. wire including cost of G.I. wire or nails etc. complete job as per specification and direction of E/I.	RM					0.00	26.85	0.00
	Providing and laying 1000 mm dia reinforced cement concrete pipe NP3 for culvert on first class bedding of granular material in single row excluding excavation, protection works, backfilling, concrete and masonry.	RM	0 Nos*2.5m				0.00	6358.68	0.00
	Providing and laying 600 mm dia reinforced cement concrete pipe NP3 for culvert on first class bedding of granular material in single row excluding excavation, protection works, backfilling, concrete and masonry.	RM	0 Nos*2.5m				0.00	2654.40	0.00
							TOTAL (in Re.)		1210519.13

Sater
05-11-2024

Junior Engineer,
Rural Works Department,
Works Section, Lauriya

Assistant Engineer,
Rural Works Department,
Works Sub Division, Lauriya

Executive Engineer,
Rural Works Department,
Works Division, BAGAHA-1

Division	Road/Bridge Name	Status	Length (in KM)	Damage Part Length During Flood	Estimated Cost (In Lakh)	Remarks
Bagaha-1	Constriction of bridge of size 2X14.50m over Harha river Bhairaganj to Katauni road of Bagha block in West Champaran Dist	Under Agreement	30.220	0.100	7.04	Motorable & Traffic Restored.
Bagaha-1	Construction of H.L.R.C.C Bridge over Harha River at Khajuri village in Khajuri to Pakki Kachhi Road Under Bagaha Block	Under Agreement	56.250	0.180	13.894	Motorable & Traffic Restored.
Bagaha-1	Construction of H.L. R.C.C Bridge in Karballa (Pipra Raiwari Mahuawa PMGSY Road) to Bhangadih Road Under Bagaha Block	Under Agreement	29.000	0.120	9.394	Motorable & Traffic Restored.
Bagaha-1	Mahadev vichauwa tola to prathmik vidhyalay hote hua bairiya khurd tak pitch road nirman	Out of Agreement	1.255	0.165	0.527	Motorable & Traffic Restored.
Bagaha-1	Barba Khuard to Mangalpur Semara	Out of Agreement	9.000	0.760	6.112	Motorable & Traffic Restored.
Bagaha-1	Barwakhurd to Padarkhap Road	Under Agreement	8.400	0.760	5.366	Motorable & Traffic Restored.
Bagaha-1	BAJRA - MARJADPUR	Out of Agreement	3.938	0.175	4.877	Motorable & Traffic Restored.
Bagaha-1	BALMIKINAGAR - JHARHARWA	Out of Agreement	6.191	0.820	9.566	Motorable & Traffic Restored.
Bagaha-1	CHIUTAHA - KADMAHA	Out of Agreement	5.536	0.130	3.541	Motorable & Traffic Restored.
Bagaha-1	GONAUJI - GORAR	Under Agreement	3.236	0.320	11.172	Motorable & Traffic Restored.
Bagaha-1	MANGALPUR - KUNAI	Out of Agreement	3.372	0.170	3.037	Motorable & Traffic Restored.
Bagaha-1	SIDHAWA - AMWA	Under Agreement	9.018	0.675	19.209	Motorable & Traffic Restored.
Bagaha-1	TARWALIA - PACHGAWAN	Out of Agreement	5.496	0.180	7.205	Motorable & Traffic Restored.
Bagaha-1	Semara to Chiutaha	Out of Agreement	3.050	2.780	31.132	Motorable & Traffic Restored.
Bagaha-1	Harna Tand to Harhar Deva via Moti Raj Road	Out of Agreement	3.200	0.120	7.247	Motorable & Traffic Restored.
Bagaha-1	Bharchhi to Taruanwa PCC Road	Under Agreement	2.000	0.060	3.047	Motorable & Traffic Restored.
Bagaha-1	Mangalpur to Semra	Out of Agreement	5.700	0.270	6.530	Motorable & Traffic Restored.
Bagaha-1	L030-Barwal T03 to Belwa Chakhani (VR10)	Under Agreement	3.900	0.180	3.447	Motorable & Traffic Restored.
Bagaha-1	Harnatar Road to Karmaha P School	Under Agreement	0.500	0.070	0.35	Motorable & Traffic Restored.
Bagaha-1	Mahuawa to Katharwa	Under Agreement	5.030	0.370	17.118	Motorable & Traffic Restored.
Bagaha-1	PWD Road Narwal to Khiriya	Under Agreement	5.700	0.565	6.381	Motorable & Traffic Restored.
Bagaha-1	Kata To Jamira	Under Agreement	8.750	0.090	2.415	Motorable & Traffic Restored.
Bagaha-1	Money Tola to Bairia	Under Agreement	1.000	0.125	7.219	Motorable & Traffic Restored.
Bagaha-1	Chakdahwa Tola to Jhandawa Tola	Under Agreement	2.000	1.900	14.673	Motorable & Traffic Restored.
Bagaha-1	BELAHWA TO AMHAT	Under Agreement	1.000	0.015	0.85	Motorable & Traffic Restored.

अधीक्षण अभियन्ता का कार्यालय

ग्रामीण कार्य विभाग, कार्य अंचल, बेतिया

पत्रांक- 1325 / बेतिया, दिनांक 14/11/2021

प्रेषक:-

अधीक्षण अभियन्ता
ग्रामीण कार्य विभाग,
कार्य अंचल, बेतिया।

सेवा में,

कार्यपालक अभियन्ता,
ग्रामीण कार्य विभाग,

विषय:-

कार्य प्रमंडल, बेतिया / नरकटियागंज / बगहा-1 / बगहा-2
वर्ष 2021 के बाद में क्षतिग्रस्त पथों को मोटरेबुल कराने हेतु किये गये कार्यों की जाँच के संबंध में।

प्रसंग:-
महाशय,

वाट्स ऐप के माध्यम से प्राप्त विभागीय निदेश के आलोक में।

उपर्युक्त विषय के संबंध में कहना है कि वर्ष 2021 में बाद में क्षतिग्रस्त पथों को मोटरेबुल कराने हेतु किये गये कार्यों की जाँच हेतु वाट्स ऐप के माध्यम से विभागीय निदेश प्राप्त हुआ है। जिसमें कार्यपालक अभियन्ता एवम् उनके अधीनस्थ पदाधिकारियों के माध्यम आवंटित प्रमंडल का जाँच करना है।

अतः विभागीय आदेश के आलोक में क्षतिग्रस्त पथों के जाँच हेतु अधोहस्ताक्षरी के द्वारा जाँच दल का गठन किया जा रहा है तथा जाँच दल दिनांक-22.11.2021 तक जाँच प्रतिवेदन अधोहस्ताक्षरी के समक्ष प्रस्तुत करेंगे। अन्यथा इसकी सारी जबाबदेही जाँचदल की होगी।

:- जाँच दल तथा उनके जाँच करने का स्थल निम्नलिखित है:-

क्रमांक	जाँच दल	जाँच स्थल	प्रतिवेदन जमा करने की अंतिम तिथि
1	कार्यपालक अभियन्ता, सहायक अभियन्ता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बेतिया।	ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-1 एवम् नरकटियागंज का जाँच कर जाँच प्रतिवेदन समर्पित करेंगे।	22.11.2021
2	कार्यपालक अभियन्ता, सहायक अभियन्ता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-1।	ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-2 का जाँच कर जाँच प्रतिवेदन समर्पित करेंगे।	22.11.2021
3	कार्यपालक अभियन्ता, सहायक अभियन्ता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-2।	ग्रामीण कार्य विभाग, कार्य प्रमंडल, बेतिया का जाँच कर जाँच प्रतिवेदन समर्पित करेंगे।	22.11.2021

विश्वासभाजन

अधीक्षण अभियन्ता

ग्रा0का0वि0, का0अ0, बेतिया।

कार्यपालक अभियन्ता का कार्यालय

ग्रामीण कार्य विभाग, कार्य प्रमंडल, बेतिया

पत्रांक-..... / बेतिया, दिनांक..... /

प्रेषक:-

कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, बेतिया।

सेवा में,

अधीक्षक अभियन्ता,
ग्रामीण कार्य विभाग,
कार्य अंचल, बेतिया।

विषय :-

कार्य प्रमंडल, बगहा-1 में वर्ष 2021 के बाढ़ में क्षतिग्रस्त पथों को मोटरेबुल कराने हेतु किये गये कार्यों की जाँच के संबंध में।

प्रसंग:-

भवदीय पत्रांक-1325/बेतिया, दिनांक-14.11.2021 एवम् अभियन्ता प्रमुख, ग्रामीण कार्य विभाग, बिहार, पटना का पत्रांक-मु0अ0-4(मु0) विविध (कार्य)-23-291 /2019-4589, दिनांक-13.11.2021।

महाशय,

उपर्युक्त विषयक एवम् प्रासंगिक पत्र के अनुपालन में कार्य प्रमंडल, बगहा-1 द्वारा उपलब्ध कराये गये मोटरेबुल पथों की सूची में अंकित पथों का अधोहस्ताक्षरी द्वारा सहायक अभियन्ता के साथ निरीक्षण किया गया। निरीक्षण के दौरान कार्य प्रमंडल, बगहा-1 द्वारा प्रतिवेदित सभी पथों पर कार्य कराया गया है एवम् यातायात चालु है। (कार्य प्रमंडल, बगहा-1 द्वारा मोटरेबुल कार्य प्रतिवेदित है।)

सादर सूचनार्थ एवम् अग्रेत्तर कार्रवाई हेतु समर्पित।

अनु0- निरीक्षण किये गये पथों की सूची।

विश्वासभाजन,

Sol

कार्यपालक अभियन्ता
ग्रा0का0वि0, का0प्र0, बेतिया।

ज्ञापांक- 3246(अनु0) /बेतिया, दिनांक- 25/11/2021 /


प्रतिलिपि:- कार्यपालक अभियन्ता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-1 को सूचनार्थ सम्प्रेषित।

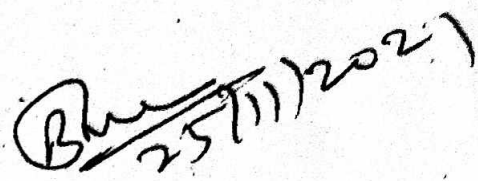
Ash
25.11.21

कार्यपालक अभियन्ता
ग्रा0का0वि0, का0प्र0, बेतिया।

घोषणा-पत्र

1. इस प्राक्कलन को असंबद्ध कार्यपालक अभियन्ता से जाँच करा ली गयी है।
2. अस्थायी पुनर्स्थापन के सामग्री का समायोजन स्थायी पुनर्स्थापन के प्राक्कलन में कर ली गयी है।


सहायक अभियन्ता / कसीय अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-1


कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-1