



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

PLAN HEAD- FDR YEAR 2021-22

DISTRICT :- WEST CHAMPARAN

BLOCK :- Bagaha-I

Estimate for Repair of Road breaches
(Damaged by Flood) for Motorability in Parsauni
To Murla

LENGTH OF ROAD (in Km)- 6.5 KM

ESTIMATED COST - 35.585 Lacs

SUBMITTED BY:
EXECUTIVE ENGINEER,
RWD WORKS DIVISION,
BAGAHA-1

TECHNICAL REPORT

Name of Road :- Parsauni To Murla

Name of Block:- Bagaha-1

Name of Division:- Bagaha-1

Name of District:- West Champaran

Estimated Cost:- Rs. 35.585 Lacs

This Estimate is prepared for Restoration of Parsauni To Murla under FDR as per the instruction of Secretary, Rural Works Department, Patna vide, 23 -60 /2020-1937 , Patna, Date- 07.07.2021. Road remains effected from flood about 01 to 02 weeks and heavy amount of water passed through it.


Honorable Chief Minister/Secratery, Rural Works Department, Bihar, Patna/D.M., West Champaran,


Bettiah/Concerned MP/MLA has instructed to maintain the traffic and movement of public etc. at the earliest so that public of this area may get connected and for the same Departmental instruction has also been issued to fill the gap made by flooded immediately.


The area surrounding is submerged in water and hence provision of Bricks Bats/ Earth Work/Sand Filling/ Bamboo Pilling/Hume Pipe has been made to maintain the road damage due to flood/heavy rainfall as per availability of material from available place by tractor. Presently there is no Contractor is employed for Construction and Maintenance of this road hence the work has been carried out Departmentally and due to this, provision of Contractor profit is not mentioned in the estimate.

In view of above, it is requested to approve the estimate amounting to Rs. 35.585 Lacs please.

Submitted for Administrative Approval please.


05-11-2021
Junior Engineer,
Bagaha-1


Assistant Engineer,
Bagaha-1


Executive Engineer
R.W.D.(W) Division, Bagaha-1

GENERAL ABSTRACT OF COST

ESTIMATE FOR REPAIR OF ROAD BREACHES (DAMAGED BY FLOOD) FOR
MOTORIBILITY IN PARSAUNI TO MURLA

DISTRICT - WEST CHAMPARAN

DIVISION - BAGAHA-I

BLOCK - Bagaha-I

LENGTH OF ROAD (In Km)- 6.5 KM

SL. No.	Item of Work	Amount
1	EARTH WORK	0.000 Lacs
2	BRICK BATS	28.499 Lacs
3	SAND BAGS	0.714 Lacs
4	BAMBOOS PILING AND RUNNER	0.092 Lacs
5	HUME PIPE	1.723 Lacs
	COST OF RESTORATION	31.029 Lacs
	ADD SEIGNIORAGE FEE @ 10% OF MATERIAL COST	0.523 Lacs
	ADD LABOUR CESS @ 1%	0.310 Lacs
	ADD GST @ 12%	3.723 Lacs
	TOTAL COST OF RESTORATION OF ROAD	35.585 Lacs

05-11-2011

Junior Engineer

Asstt. Engineer

Executive Engineer

Technically approved for Rs 3558500 = 00 (thirty five Lac Fifty eight thousand Five hundred) only/-

25/11/11

S.E.
R.W.D. (W) Circle
Bettiah

Name of Work:- Estimate for Repair of Road breaches (Damaged by Flood) for Motorability in Parsauni To Muria

Head - FDR

Sl No.	Item No.	Name of Item	unit	No	Length	Width	Height	Qty.	Rate	Amount
1		EARTH WORK - Construction of embankment with approved material obtained from borrow pits with a lift upto 1.5 m, transporting to site, spreading, grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000 m as per Technical Specification Clause 301.5	cum	As Per Appendix I				0	134.33	0
2		Providing and Labour for laying dry graded Brick Bats by Road Roller in proper grade camber and super elevation dry and wet rolling including cost of running charge of roller driver and khalasi etc. all complete as per approved design, specification and direction of E/I.	cum	As Per Appendix II				1391.37	2048.30	2849943.17
3		Providing, Filling Sand Bag, Stitching and Placing etc. all complete as per specification and direction of E/I.	Nos.					3284	21.75	71427.00
4		Providing and Labour for cutting 62 mm to 75 dia Bamboo piles to size and making shoes and driving etc. complete job as per specification and direction of E/I.	RM					124.00	47.61	5903.64
5		Providing and Labour for fitting & fixing 62 mm to 75 dia Bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I. wire including cost of G.I. wire or nails etc. complete job as per specification and direction of E/I.	RM					122.00	26.85	3275.70
6		Providing and laying 1000 mm dia reinforced cement concrete pipe NP3 for culvert on first class bedding of granular material in single row excluding excavation, protection works, backfilling, concrete and masonry.	RM	11 Nos*2.5m				27.50	6265.79	172309.23
7		Providing and laying 600 mm dia reinforced cement concrete pipe NP3 for culvert on first class bedding of granular material in single row excluding excavation, protection works, backfilling, concrete and masonry.	RM	0 Nos*2.5m				0.00	2617.24	0.00
TOTAL (in Re.)									3102858.74	

Satish
05-11-2017
Junior Engineer,
Rural Works Department,
Works Section, Bagaha-I

Assistant Engineer,
Rural Works Department,
Works Sub Division, Bagaha-I

Executive Engineer,
Rural Works Department,
Works Division, BAGAHA-1

Road/Bridge Name	Status	Length (In KM)	Damage Part Length During Flood	Estimated Cost (In Lakh)	Remarks
Bhidari To Sobagi Barwa	Under Agreement	1.600	0.160	2.672	Motorable & Traffic Restored.
Bahwariya To Bahwariya Purnb Tola	Under Agreement	0.900	0.240	7.371	Motorable & Traffic Restored.
NH-28 B Bahwariya Chowk to Bahwariya Tola	Under Agreement	1.265	0.060	4.099	Motorable & Traffic Restored.
Khairpokhira to Ekderwa	Under Agreement	4.175	0.325	4.441	Motorable & Traffic Restored.
Slawa School to Harpur	Under Agreement	2.875	0.130	2.991	Motorable & Traffic Restored.
Bangnon Manjahariya To Bhulahwa Reyal Miya Tola	Under Agreement	2.690	0.220	9.537	Motorable & Traffic Restored.
Kohargaddi to Hardi	Under Agreement	1.695	0.300	5.086	Motorable & Traffic Restored.
NH-28 B Chandisthan Mor to Naraipur	Under Agreement	4.880	0.380	39.876	Motorable & Traffic Restored.
Chhotki Patti Bhairongang Path to Deura (Dhampur)	Under Agreement	2.225	0.250	9.973	Motorable & Traffic Restored.
Englishiya Chandraha Path To Pipra	Under Agreement	2.980	0.170	2.677	Motorable & Traffic Restored.
NH 28B to Chhotka Belwa	Under Agreement	1.845	0.050	2.874	Motorable & Traffic Restored.
Malhi Tola to Tesrahiya	Under Agreement	1.670	0.422	6.117	Motorable & Traffic Restored.
Bhathiya Deep Narayan Mishr Ke Tola to Bhathiya	Under Agreement	0.795	0.460	13.943	Motorable & Traffic Restored.
Makari Bazar To Tiwari Tola	Under Agreement	3.445	0.386	7.36	Motorable & Traffic Restored.
PMGSY Raybari Mahua Path To Manjariya	Under Agreement	2.945	0.600	9.893	Motorable & Traffic Restored.
Rupwariya Bandh to Nawalpur Nuniya Tola	Under Agreement	6.480	0.260	14.579	Motorable & Traffic Restored.
Ahirauiya To Samarkol	Under Agreement	4.400	0.250	6.157	Motorable & Traffic Restored.
Bishunpurwa to Bisinpurwa Bandh	Under Agreement	1.110	0.150	4.909	Motorable & Traffic Restored.
NH 28 B PATH TO VARDHA	Under Agreement	2.400	0.150	4.627	Motorable & Traffic Restored.
Part A Manjhariy Mahdalit Tola to Khajuree	Under Agreement	1.145	0.330	16.974	Motorable & Traffic Restored.
Kapardhika To Pathkhauli	Under Agreement	10.200	0.125	18.25	Motorable & Traffic Restored.
PWD Road to Chandraha	Under Agreement	8.350	0.050	2.001	Motorable & Traffic Restored.
Lagunaha to Bariwa Bandh	Under Agreement	3.800	0.480	4.444	Motorable & Traffic Restored.
Parsauni To Murla	Out of Agreement	6.500	0.950	35.585	Motorable & Traffic Restored.
Gram Dumariya ke Mehuda Path me Bhaisahi Gram To Chhotki Bhaisi Tak Maramati Karya	Out of Agreement	1.930	0.220	5.191	Motorable & Traffic Restored.
Construction of road Done Canal To Bholapur Kharhat	Out of Agreement	4.050	0.212	9.443	Motorable & Traffic Restored.
Kumbha se Siktia jane wali sadak me , itkaran kar	Out of Agreement	0.117	0.117	8.512	Motorable & Traffic Restored.

अधीक्षण अभियन्ता का कार्यालय

ग्रामीण कार्य विभाग, कार्य अंचल, बेतिया

चक्र- 1323 / बेतिया दिनांक 14/11/2021

देखकर-

अधीक्षण अभियन्ता
ग्रामीण कार्य विभाग,
कार्य अंचल, बेतिया।

सेवा में

कार्यपालक अभियन्ता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, बेतिया / नरकटियागंज / बगहा-1 / बगहा-2

विषय- वर्ष 2021 के बाढ़ में क्षतिग्रस्त पथों को मोटरेबुल कराने हेतु किये गये कार्यों की जाँच के संबंध में।

प्रसंग- वादस ऐप के माध्यम से प्राप्त विभागीय निदेश के आलोक में।
सहायक,

उपर्युक्त विषय के संबंध में कहना है कि वर्ष 2021 में बाढ़ में क्षतिग्रस्त पथों को मोटरेबुल कराने हेतु किये गये कार्यों की जाँच हेतु वादस ऐप के माध्यम से विभागीय निदेश प्राप्त हुआ है। जिसमें कार्यपालक अभियन्ता एवम् उनके अधीनस्थ पदाधिकारियों के माध्यम आवंटित प्रमंडल का जाँच करना है।

अतः विभागीय आदेश के आलोक में क्षतिग्रस्त पथों के जाँच हेतु अधोहस्ताक्षरी के द्वारा जाँच दल का गठन किया जा रहा है तथा जाँच दल दिनांक-22.11.2021 तक जाँच प्रतिवेदन अधोहस्ताक्षरी के समक्ष प्रस्तुत करेंगे। अन्यथा इसकी सारी जबाबदेही जाँचदल की होगी।

-जाँच दल तथा उनके जाँच करने का स्थल निम्नलिखित है:-

क्रमांक	जाँच दल	जाँच स्थल	प्रतिवेदन जमा करने की अंतिम तिथि
1	कार्यपालक अभियन्ता, सहायक अभियन्ता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बेतिया।	ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-1 एवम् नरकटियागंज का जाँच कर जाँच प्रतिवेदन समर्पित करेंगे।	22.11.2021
2	कार्यपालक अभियन्ता, सहायक अभियन्ता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-1।	ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-2 का जाँच कर जाँच प्रतिवेदन समर्पित करेंगे।	22.11.2021
3	कार्यपालक अभियन्ता, सहायक अभियन्ता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-2।	ग्रामीण कार्य विभाग, कार्य प्रमंडल, बेतिया का जाँच कर जाँच प्रतिवेदन समर्पित करेंगे।	22.11.2021

विश्वामाजुन

अधीक्षण अभियन्ता

ग्रा0का0वि0, का0अ0, बेतिया।

कार्यपालक अभियन्ता का कार्यालय

ग्रामीण कार्य विभाग, कार्य प्रमंडल, बेतिया

पत्रांक-..... / बेतिया, दिनांक-..... /

प्रेषक:-

कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, बेतिया।

सेवा में,

अधीक्षक अभियन्ता,
ग्रामीण कार्य विभाग,
कार्य अंचल, बेतिया।

विषय :-

कार्य प्रमंडल, बगहा-1 में वर्ष 2021 के बाढ़ में क्षतिग्रस्त पथों को मोटरबुल कराने हेतु किये गये कार्यों की जांच के संबंध में।

प्रसंग:-

भवदीय पत्रांक-1326/बेतिया, दिनांक-14.11.2021 एवम् अभियन्ता प्रमुख, ग्रामीण कार्य विभाग, बिहार, पटना का पत्रांक-मु0अ0-4(मु0) विविध (कार्य)-23-291 /2019-4589, दिनांक-13.11.2021।

महाराज,

उपर्युक्त विषयक एवम् प्रासंगिक पत्र के अनुपालन में कार्य प्रमंडल, बगहा-1 द्वारा उपलब्ध कराये गये मोटरबुल पथों की सूची में अंकित पथों का अधोहस्ताक्षरी द्वारा सहायक अभियन्ता के साथ निरीक्षण किया गया। निरीक्षण के दौरान कार्य प्रमंडल, बगहा-1 द्वारा प्रतिवेदित सभी पथों पर कार्य कराया गया है एवम् यातायात चालू है। ~~कराया गया मोटरबुल कार्य संतोखजनक है।~~

सादर सूचनार्थ एवम् अग्रेत्तर कार्रवाई हेतु समर्पित।

अनु0- निरीक्षण किये गये पथों की सूची।

विश्वासभाजन,

sol

कार्यपालक अभियन्ता

ग्रा0का0वि0, का0प्र0, बेतिया।

ज्ञापक-3246(अनु0)/बेतिया, दिनांक-25/11/2021/

प्रतिलिपि:- कार्यपालक अभियन्ता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-1 को सूचनार्थ सम्प्रेषित।

25.11.21

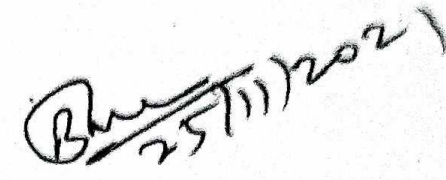
कार्यपालक अभियन्ता

ग्रा0का0वि0, का0प्र0, बेतिया।

घोषणा-पत्र

1. इस प्राक्कलन को असंबन्ध कार्यपालक अभियन्ता से जाँच करा ली गयी है।
2. अस्थायी पुनर्स्थापन के सामग्री का समायोजन स्थायी पुनर्स्थापन के प्राक्कलन में कर ली गयी है।


सहायक अभियन्ता / कम्प्यूट अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-1


कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-1