



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILED PROJECT REPORT FOR MOTRABLE REPAIRING OF ROAD

F.D.R. MOTRABLE RESTORATION (YEAR - 2021)

CHANGANJ ADIVASI TOLA TO GAURIYA

DETAILED ESTIMATE OF F.D.R. MOTRABLE REPAIRING ROAD

ROAD LENGTH	0 TO 940	
DISTRICT	KISHANGANJ	
BLOCK	THAKURGANJ	
DIVISION	KISHANGANJ - 2	
TOTAL LENGTH OF ROAD	0.940	KM
TOTAL COST OF F.D.R. PART - A	Rs. 22.627	Lacs
ADD G.S.T @ 12%	Rs. 2.715	Lacs
ADD Labour Cess @ 1%	Rs. 0.226	Lacs
ADD Seigniorage Fee @ 10%	Rs. 0.271	Lacs
TOTAL COST OF RESTORATION WORK In Rs.	Rs. 25.839	Lacs

SUBMITTED BY
The Executive Engineer,
Works Division, Kishanganj - 2

प्रतिवेदन

प्रस्तुत प्राक्कलन ग्रामीण कार्य विभाग कार्य प्रमण्डल किशनगंज -2 अन्तर्गत हाकुसगंज.....
प्रमण्डल के पथChainingj. Belivasi to 1/9 to 1/9 praxya..... (.....) जो
दिनागीय Online Morititring System MIS पर अपलोड है के बाढ़ 2021 से क्षतिग्रस्त हो जाने के
कारण यातायात लायक Moterable हेतु बनाया गया है। इस कार्य को करने का निर्देश ग्रामीण कार्य
विभाग, बिहार सरकार के पत्रांक:-मु0अ0-4(मु0) विविध (कार्य) -23-291/2019-4275/पटना, दिनांक-
22/10/2021 से प्राप्त है। इस पत्र से Real time Geotagged Photographs को कार्य के दौरान
अपलोड करते हुए (Moterable) कार्य कराना सुनिश्चित करने का निर्देश प्राप्त है।


उक्त निर्देश के आलोक में मेन्ही नदी..... अतिवृष्टि/बाढ़ उपधार से आए बाढ़ के करण इस पथ के
रोडवे के क्षतिग्रस्त हो जाने से सुरक्षित आवागमन हेतु Moterable कार्य कराया गया है। MIS में
उपलोडेड फोटो दिनांक का Lat/Long के साथ लिया गया है। नेपाल तराई से
निकलनेवाली इस नदी के तेज धार से इस पथ में कटाव की स्थिति बनी। मोटरेबल कार्य में
आवश्यकतानुसार मिट्टी भराई, लोकल बालु भराई, खाली सिमेंट बैग में लोकल बालु भरकर, बॉस का
पाइल, चचरी, बॉस का रनर, ह्यूम पाइप एवं ब्रिक बैट का इस्तेमाल किया गया है। निर्देशानुसार कराए
गए कार्य कि Geotagged Photographs Real Time के साथ MIS पर उद्धत है। MIS की
छायाप्रति, अपलोडेड फोटोग्राफ की छायाप्रति, दर विश्लेषण एवं विभागीय आदेशों की छायाप्रति प्राक्कलन
में संलग्न की जा रही है। प्राक्कलन में प्रयुक्त दर अद्यतन है।

प्राक्कलन की यथाशीघ्र अनुमोदन अपेक्षित है ताकि अग्रेतर कार्रवाई की जा सके।


01/08/21

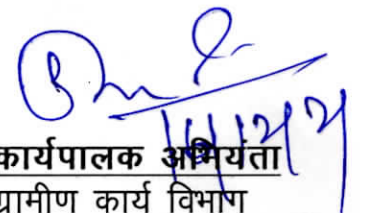
कनीय अभियंता
ग्रामीण कार्य विभाग

कार्य प्रशाखा, हाकुसगंज.....


01/08/21

सहायक अभियंता
ग्रामीण कार्य विभाग

कार्य अवर प्रमण्डल, हाकुसगंज.....


01/08/21

कार्यपालक अभियंता
ग्रामीण कार्य विभाग

कार्य प्रमण्डल किशनगंज-2

Inspection Report for Flood Damage Work

1. Name of PIUs

: Er. Uday Shankar Chudhary, E.E. Kishangarh

2. Name Of Block / Road

: Thakurganj / Chaurigunj Adivasi to Gauri

A. For Road

1. Damage Location / Chainage

: 0.500 KM

2. Damage Length

: 100 M

3. Nature Of Damage

: River side crust cutting.

4. Details Of Restoration

:

i) Material Being Used In Restoration

: Sand bags bamboo etc.

ii) Equipment / Tools Being Used In Restoration Works

: Tractor

iii) Procedure Taken Up In Restoration Works

: manually

iv) Restored Length

: 100 M

B. For Bridge

1. Damage Location / Chainage

:

2. Damage Length

:

3. Nature Of Damage

:

4. Details Of Restoration

:

i) Material Being Used In Restoration

:

ii) Equipment / Tools Being Used in Restoration Works

:

iii) Procedure Taken Up In Restoration Works

:

iv) Restored Length

:

N/A.

work has been completed. Satisfactory.

02/12/21
JE

02/12/21

Signature of JE / AE / EE

02/12/21
Signature

(Name Of Inspector)

GENERAL ABSTRACT OF COST FOR MAINTENANCE OF ROAD

NAME OF ROAD : CHAINGANJ ADIVASI TOLA TO GAURIYA
DISTRICT KISHANGANJ
DIVISION KISHANGANJ - 2
BLOCK THAKURGANJ
LENGTH OF ROAD (IN KM) 0.940

Sl. No.	ITEM OF WORK	AMOUNT (LAKHS)
1	LOCAL SAND	0.000
2	HUME PIPE	0.000
3	BRICK BATS	0.000
4	SAND BAGS	21.391
5	BAMBOO WORK	1.236
6	STEEL DRUM SHEET	0.000
TOTAL COST OF PROJECT =		22.627
Add G.S.T. @ 12%		2.715
Add Labour Cess @ 1%		0.226
Add Seigniorage Fee @ 10%		0.271
Total Cost of Restoration Work =		25.839

[Signature]
01/08/22
J.E.
RWD

[Signature]
01/08/22
A.E.
RWD

[Signature]
01/08/22
E.E.
RWD

Technically sanction for Rs 2583900.00 (Rupees twenty five Lacs eighty three thousand nine hundred) only

[Signature]
04/04/22
E.O.

[Signature]
04/04/22
अधीक्षण अभियंता
प्राचीन कार्य विभाग
कार्य अंचल, किशानगंज