

RURAL WORKS DEPARTMENT GOVT. OF BIHAR



**Name of Work:- MA. Manjar Imam House Bin Tola Bhasepur to PMGSY
Road Durga Mandir.
Block:-Bajpatti.**

F.D.R

Rs.86688.00-

57502-00


Year-2021-22.

Name of Circle:- R.W.D. Works Circle, Sitamarhi.

Name of Division:- R.W.D. Works Division, Pupri.

बाढ़ क्षतिग्रस्त पथों का अन्तर प्रमंडलीय जाँच प्रतिवेदन हेतु प्रपत्र

1	निरीक्षी पदाधिकारी का नाम एवं पदनाम:-	ई0 विनोद कुमार साह, कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, सीतामढ़ी।
2	निरीक्षण की तिथि:-	22/12/2021
3	पथ का नाम (शीर्ष के साथ)	MA. Mansar Imam House Birtola Bhasepur to PMGP Road Durga Mandir
4	पथ की लम्बाई	2.00 Km
5	कार्य प्रमंडल का नाम	ग्रामीण कार्य विभाग, कार्य प्रमंडल, पुपरी।
6	प्रखंड का नाम	बाजपट्टी।
7	पथ की स्थिति	(Completed/Ongoing)
8	पथ अनुरक्षण अवधि में हैं	(Yes/No)
9	क्षतिग्रस्त भाग की लम्बाई	
10	क्षतिग्रस्त भाग में कराये गये कार्य का विवरणी (लम्बाई x ऊँचाई x गहराई)	All Mesurment are attached in estimate Qty of Brick Bats :- 29,5492 Qty of Rubbish:- 7,3798 Total Qty :- 36,8990 Entered in MB No:- 2706 Page No:- 1-3
11	अस्थायी पुर्नस्थापन में किस-किस सामग्रीयों को उपयोग किया गया है। उसकी विवरणी	Brick Bats & Rubbish
12	अभ्युक्ति	संतोष प्रद


 निरीक्षी पदाधिकारी का हस्ताक्षर
 पदनाम सहित

DETAILED ESTIMATE FOR F.D.R

General Abstract of Cost

Name of Road:-MA. Manjar Imam House Bin Tola Bhasepur to PMGSY Road Durga Mandir


Length of Road:- 2.000 Km

Block:-Bajpatti


District:-Sitamarhi

S. No.	Particulars	Total Cost (in Lakh)
1	Total Cost for Motorable Roads	73604.00
2	Labour cess @1%	736.04
3	GST @12%	8832.48
4	Seigniorage Fee @ 10%	3515.00
5	Total Cost of Road Repair	86687.52

Say Rs. ~~86688.00~~
57582=00


5-11-21

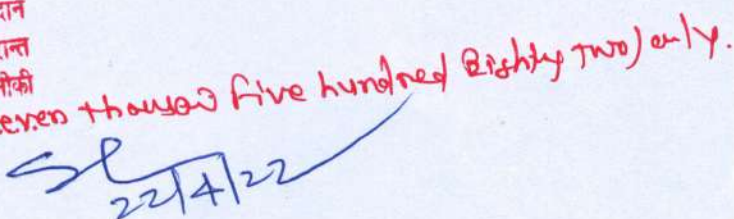
JE


5-11-21

AE


5-11-21

अभियन्ता-प्रमुख ग्रामीण कार्य विभाग के पत्रांक-4849
दिनांक-07/12/2021 के आदेशानुसार प्रशासनिक
स्वीकृति के प्रत्याशा में औपबंधित तकनीकी स्वीकृति प्रदान
की जा रही है। प्रशासनिक स्वीकृति प्राप्त होने के उपरान्त
पुनः तकनीकी स्वीकृति प्रदान की जायेगी। औपबंधित तकनीकी
स्वीकृति रुपये...~~5,75,822.00~~...~~Five~~...~~Seven thousand five hundred eighty two~~...~~only~~...
की प्रदान की जाती है।


22/4/22

अधीक्षण अभियन्ता
ग्रामीण कार्य विभाग
कार्य अंचल, सीतामढ़ी

Schedule of Quantity

Name of Road:-MA. Manjar Imam House Bin Tola Bhasepur to PMGSY Road Durga Mandir

Sl. No.	Description of Item	Qty	Unit	Rate	Amount
1	Sand Filling in Foundation Trenches as per Drawing & Technical Specification.	0.00	Cum	488.11	0.00
2	Providing and laying of Brick Bat obtained from Chimney with machanical means with all spreading, grading to required slope and compacted at OMC to achieve required density with all complete as per the direction of engineer in charge.	36.8990			0.00
	Less 20% for Voids	7.3798		1733.25	51148.00
		29.5192	Cum	2105.01	62138.2119
3	Single bamboo paiasiding/ walling of whole 2nd class bamboo (Jati or Bethua) 75mm dia and closely packed & driven including fitting fixing with half bamboo kamis horizontally in three rows with cane or tying with wire complete and Struts 1.5m apart longitudinally and providing brush wood as per drawing and technical specification clause 1302.5	0.00	m	140.4	0.00
4	Providing, Laying and placing empty cement bag filled with local sand including stiching with sutall etc. do.....do.....all complete job as per specification and direction of E/I. (including Royalty and all Taxes)	0.00	no.	9.63	0.00
5	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 1000) as per design in Single Row with old available pipe	0.00	m	3400.00	0.00
6	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 600) as per design in Single Row with old available pipe	0.00	m	850.00	0.00
7	Providing Quarry Material Rabbish for filling the voids in bricks batsdo.....all complete job as per specification and diretion of E/I.			873.01	6434.00
	Taking 20% of Brick Qty for Rabbish	7.3798	Cum	1553.68	11465.84766

Total 73604.06
Say 73604.00
57582.00

JE

AE

Details of Measurement of ditches filled by brick bats and rabbish

Name of Road:-MA. Manjar Imam House Bin Tola Bhasepur to PMGSY Road Durga Mandir

	Nos.	L	W		H		VOLUME
CH 0 M	1	6.00	3.000		0.250		4.5000
	1	1.50	1.000		0.220	Av	0.3300
	1	1.00	1.000		0.180		0.1800
CH 100 M	1	14.00	3.000		0.280		11.7600
CH 110 M	1	8.00	2.500		0.250		5.0000
	1	2.50	3.000		0.330	Av	2.4750
	1	3.00	2.000		0.275	Av	1.6500
	1	1.00	2.000		0.250		0.5000
CH 200 M	1	3.00	2.800		0.660		5.5440
	1	2.00	2.500		0.200		1.0000
	1	1.00	2.000		0.180		0.3600
	1	4.00	3.000		0.300		3.6000
		Total (in Cum)					36.8990
Laying Hume Pipe of 1000 mm dia		0	0		0		0.00
Laying Hume Pipe of 600 mm dia		0	0		0		0.00
Cement Bage							

[Signature]
S-11-21

JE

[Signature]
S-11-21

AE

[Signature]
S-11-21

EE