

RURAL WORKS DEPARTMENT GOVT. OF BIHAR



Name of Work:- Harinagar Naya tola Dhadhi Kurhar Raypur.
Block:- Bokhara.

F.D.R

Rs.382294.00 254041.20

Year-2021-2

Name of Circle:- R.W.D. Works Circle, Sitamarhi.

Name of Division:- R.W.D. Works Division, Pupri.

DETAILED ESTIMATE FOR F.D.R

General Abstract of Cost

Name of Road:-Harinagar Naya tola Dhadhi Kurhar Raypur.

Length of Road:-3.100 Km

Block:-Pupri


District:-Sitamarhi

S. No.	Particulars	Total Cost (in Lakh)
1	Total Cost for Motorable Roads	324595.00
2	Labour cess @1%	3245.95
3	GST @12%	38951.40
4	Seigniorage Fee @ 10%	15501.21
5	Total Cost of Road Repair	382293.56

Say Rs. 382294.00

254041.00



JE


AE


EE

अभियंता प्रमुख ग्रामीण कार्य विभाग के पत्रांक-4849 दिनांक-07/12/2021 के आदेशानुसार प्रशासनिक स्वीकृति के प्रत्याशा में औपबंधित तकनीकी स्वीकृति प्रदान की जा रही हैं। प्रशासनिक स्वीकृति प्राप्त होने के उपरान्त पुनः तकनीकी स्वीकृति प्रदान की जायेगी।

औपबंधित तकनीकी स्वीकृति रुपये 254041.00/- Two lakh fifty four thousand forty one only की प्रदान की जाती हैं।



अधीक्षण अभियन्ता
ग्रामीण कार्य विभाग
कार्य अंचल, सीतामढ़ी


Schedule of Quantity

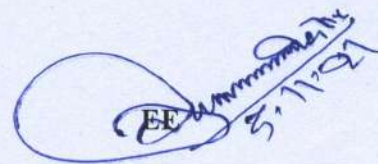
e of Road:-Harinagar Naya tola Dhadhi Kurhar Raypur.

	Description of Item	Qty	Unit	Rate	Amount
1	Sand Filling in Foundation Trenches as per Drawing & Technical Specification.	0.00	Cum	488.11	0.00
2	Providing and laying of Brick Bat obtained from Chimney with machanical means with all spreading, grading to required slope and compacted at OMC to achieve required density with all complete as per the direction of engineer in charge.	162.7253			0.00
	Less 20% for Voids	32.54505			
		130.1802	Cum	2105.01	274030.6228
3	Single bamboo paiasiding/ walling of whole 2nd class bamboo (Jati or Bethua) 75mm dia and closely packed & driven including fitting fixing with half bamboo kamis horizontally in three rows with cane or tying with wire complete and Struts 1.5m apart longitudinally and providing brush wood as per drawing and technical specification clause 1302.5	0.00	m	140.4	0.00
4	Providing, Laying and placing empty cement bag filled with local sand including stiching with sutall etc. do.....do.....all complete job as per specification and direction of E/I. (including Royalty and all Taxes)	0.00	no.	9.63	0.00
5	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 1000) as per design in Single Row with old available pipe	0.00	m	3400.00	0.00
6	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 600) as per design in Single Row with old available pipe	0.00	m	850.00	0.00
7	Providing Quarry Material Rabbish for filling the voids in bricks batsdo.....all complete job as per specification and diretion of E/I.			873.04	28407.20
	Taking 20% of Brick Qty for Rabbish	32.54505	Cum	1553.68	50564.59328

Total ~~324595.22~~
Say ~~324595.00~~
254041.20


JE


AE



EE


Details of Measurement of ditches filled by brick bats and rabbish

Location of Road:-Harinagar Naya tola Dhadhi Kurhar Raypur.

	Nos.	L	W		H		VOLUME
Link Road (A)	1	6.00	3.000		0.500	Av	9.0000
	1	3.00	3.000		0.250		2.2500
	1	3.20	3.100		0.300	Av	2.9760
	1	3.60	3.000		0.350		3.7800
	1	2.50	3.000		0.300	Av	2.2500
	1	3.40	2.900		0.300	Av	2.9580
Link Road (Munsi Tola to Chikua) CH 0.00 F	1	26.00	3.850	A	0.600	Av	60.0600
CH 600 M	1	2.00	3.100		0.300		1.8600
	1	4.50	3.400		0.250		3.8250
	1	12.00	2.300	Av	0.300		8.2800
	1	1.50	1.000		0.200		0.3000
	1	1.00	1.600		0.200		0.3200
	1	4.00	2.000	Av	0.250		2.0000
	1	1.25	2.500		0.250		0.7813
	1	1.40	3.000		0.250		1.0500
Link Road (KK)	2	45.00	0.650		0.600		35.1000
	1	38.00	3.250		0.210	Av	25.9350
		Total (in Cum)					162.7253
Laying Hume Pipe of 1000 mm dia	0	0			0		0.00
Laying Hume Pipe of 600 mm dia	0	0			0		0.00
Cement Bage							



JE


AE


Engineer

बाढ़ क्षतिग्रस्त पथों का अन्तर प्रमंडलीय जाँच प्रतिवेदन हेतु प्रपत्र

	निरीक्षी पदाधिकारी का नाम एवं पदनाम:-	ई0 विनोद कुमार साह, कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, सीतामढ़ी।
2	निरीक्षण की तिथि:-	22-12-2021
3	पथ का नाम (शीर्ष के साथ)	Harinagar Naya tola Dhadhi Kuchan Raypur
4	पथ की लम्बाई	3.100 km
5	कार्य प्रमंडल का नाम	ग्रामीण कार्य विभाग, कार्य प्रमंडल, पुपरी।
6	प्रखंड का नाम	बोखड़ा।
7	पथ की स्थिति	(Completed/Ongoing)
8	पथ अनुरक्षण अवधि में हैं	(Yes/No)
9	क्षतिग्रस्त भाग की लम्बाई	
10	क्षतिग्रस्त भाग में कराये गये कार्य का विवरणी (लम्बाई x ऊँचाई x गहराई)	All Mesurment are attached in estimate Qty of Brick Bats :- 130.1802 m³ Qty of Rubbish:- 32.54505 m³ Total Qty :- 162.7253 m³ Entered in MB No:- 2681 Page No:- 1-3
11	अस्थायी पुर्नस्थापन में किस-किस सामग्रीयों को उपयोग किया गया है। उसकी विवरणी	Brick Bats & Rubbish
12	अभ्युक्ति	र.न.सो.पु.द.


 निरीक्षी पदाधिकारी का हस्ताक्षर
 पदनाम सहित