



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

PLAN HEAD- FDR YEAR 2021

DISTRICT :- WEST CHAMPARAN
BLOCK :- BAGAHA-2

Scheme Head - MR-3054 (OLD) (Under Maintenance)

Estimate for Repair of Road breaches
(Damaged by Flood) for Motorability in PWD
Road Narwal To Khiriya

LENGTH OF ROAD (in Km)- 5.7 KM
DAMAGED LENGTH (in Km)- 0.568 KM

ESTIMATED COST -	6.381	Lacs
------------------	-------	------

SUBMITTED BY:
EXECUTIVE ENGINEER,
RWD WORKS DIVISION,
BAGAHA-1

TECHNICAL REPORT

Name of Road:- POD Road Narwal of Phariya

Name of Block:- Bagaha-2

Name of Division:- Bagaha-1

Name of District:- West Champaran


Estimated Cost:- Rs. 6.381 Lacs

This Estimate is prepared for Restoration of POD Road Narwal to Phariya road,
.....road under FDR as per the instruction of Secretary, Rural Works Department, Patna vide,
23 -60 /2020-1937 , Patna, Date- 07.07.2021. Road remains effected from flood about 01 to 02 weeks
and heavy amount of water passed through it.


Honorable Chief Minister/Secretary, Rural Works Department, Bihar, Patna/D.M., West Champaran,
Bettiah/Concerned MP/MLA has instructed to maintain the traffic and movement of public etc. at the
earliest so that public of this area may get connected and for the same Departmental instruction has also
been issued to fill the gap made by flooded immediately.


The area surrounding is submerged in water and hence provision of EPG, 1/2 sand bags
bamboo poles & brush bales.....has been made to
maintain the road damage due to flood/heavy rainfall as per availability of material from available place by
tractor. Presently there is no Contractor is employed for Construction and Maintenance of this road hence
the work has been carried out Departmentally and due to this, provision of Contractor profit is not
mentioned in the estimate.

In view of above, it is requested to approve the estimate amounting to Rs. 6.381 Lacs please.
Submitted for Administrative Approval please.


03/11/21

Junior Engineer,
Bagaha-2


03/11/21
Assistant Engineer,
Bagaha-2


05/11/21
Executive Engineer
R.W.D.(W) Division, Bagaha-1

Scheme Head - MR-3054 (OLD) (Under Maintenance)

GENERAL ABSTRACT OF COST

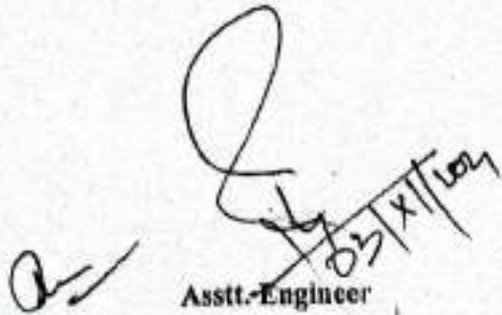
ESTIMATE FOR REPAIR OF ROAD BREACHES (DAMAGED BY FLOOD) FOR
MOTORABILITY IN PWD ROAD NARWAL TO KHIRIYA

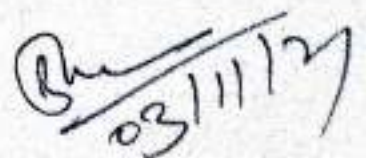
DISTRICT - WEST CHAMPARAN
BLOCK - BAGAHIA-2

DIVISION - BAGAHIA-1
LENGTH OF ROAD (in Km) - 5.7 KM
DAMAGED LENGTH (in Km) - 0.568 KM

SL. No.	Item of Work	Amount
1	EARTH WORK	1.739 Lacs
2	BRICK BATS	2.188 Lacs
3	SAND BAGS	1.223 Lacs
4	BAMBOOS PILING AND RUNNER	0.227 Lacs
5	HUME PIPE	0.000 Lacs
	COST OF RESTORATION	5.378 Lacs
	ADD SEIGNIORAGE FEE @ 10% OF MATERIAL COST	0.304 Lacs
	ADD LABOUR CESS @ 1%	0.054 Lacs
	ADD GST @ 12%	0.645 Lacs
	TOTAL COST OF RESTORATION OF ROAD	6.381 Lacs


Junior Engineer


Asstt. Engineer


Executive Engineer


Technically ~~approved~~ ^{Sanctioned} for Amt Rs. 6381 Lacs (Rupees Six thousand three hundred and one hundred) only including GST, work chgs.



SE
RWD Circle
Belle

ie of Work:- Estimate for Repair of Road breaches (Damaged by Flood) for Motorability in PWD Road Narwal To Khiriya

FDR	Name of Item	unit	No	Length	Width	Height	Qty.	Rate	Amount
	EARTH WORK - Construction of embankment with approved material obtained from borrow pits with a lift upto 1.5 m, transporting to site, spreading, grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000 m as per Technical Specification Clause 301.5	cum		As Per Appendix I			1284.8	134.33	173930.484
	Providing and and Labour for consolidation in Jhama metal by Road Roller in proper grade camber and super elevation dry and wet rolling including cost of running charge of roller driver and khalasi making and maintaining diversion tight barrier - do - do - danger signal etc. all complete .	cum		As Per Appendix II			106.840	2048.30	218840.37
	Providing and Labour for laying dry graded Brick Bats including light ramming etc. all complete as per approved design, specification and direction of E/I.	cum		As per Mesurment Sheet			0.000	1790.14	0.00
	Providing, Filling Sand Bag, Stitching and Placing etc. all complete as per specification and direction of E/I.	Nos.		As per Mesurment Sheet			6217.000	19.67	122288.39
	Providing and Labour for cutting 62 mm to 75 dia Bamboo piles to size and making shoes and driving etc. complete job as per specification and direction of E/I.	RM		As per Mesurment Sheet			324.000	47.61	15425.64
	Providing and Labour for fitting & fixing 62 mm to 75 dia Bamboo runners in position at every vritical pile with 150 mm long nails or 38 swg G.I. wire including cost of G.I. wire or nails etc. complete job as per specification and direction of E/I.	RM		As per Mesurment Sheet			272.000	26.85	7303.20
	Providing and laying 1000 mm dia reinforced cement concrete pipe NP3 for culvert on first class bedding of granular material in single row excluding excavation, protection works, backfilling, concrete and masonry.	RM		0 Nos*2.5m			0.000	6506.21	0.00
	Providing and laying 600 mm dia reinforced cement concrete pipe NP3 for culvert on first class bedding of granular material in single row excluding excavation, protection works, backfilling, concrete and masonry.	RM		0 Nos*2.5m			0.000	2713.41	0.00
TOTAL (in Re.)									537788.09


Junior Engineer,
Rural Works Department,
Works Section, BAGAHA-2


Assistant Engineer,
Rural Works Department,
Works Sub Division, BAGAHA-2


Executive Engineer,
Rural Works Department,
Works Division, BAGAHA-1

SEIGNIORAGE FEE CALCULATION SHEET

Item description	unit	Quantity of Consuming Item	Materials Required/ Unit	Unit	Quantity/ Unit	Total Quantity Required	Rate	Amount	Seginorage Fee (RS)	Total Amount (RS)
Earth Work	Cum	1294.80	Earth	Cum	1.0	1294.80	34.82	45084.94	4508.49	4508.49
Brick bats	Cum	106.84	Brick bats	Cum	1.2	128.21	1549.51	198659.58	19865.96	19865.96
Sand Bags	per bag	6217.00	sand	Cum	0.034	211.38	286.55	60570.37	6057.04	6057.04
1000 MM Dia	RM	0.00	Sand at site	Cum	0.04	0.00	0.00	0.00	0.00	0.00
600 MM Dia	RM	0.00	Sand at site	Cum	0.0032	0.00	0.00	0.00	0.00	0.00
Total Amount of seginorage fee in construction (Rs)										30451.49

Road/Bridge Name	Status	Length (In KM)	Damage Part Length During Flood	Estimated Cost (In Lakh)	Remarks
Construction of bridge of size 2RT4.50m over Barha river (Bharagang) in Katatal road of Bagaha block in West Champaran Dist.	Under Agreement	30.220	0.100	7.04	Motorable & Traffic Restored.
Construction of I.L.L. R.C.C. Bridge over the Barha River at Khajuri village in Khajuri to Pakki Kachhi Road Under Bagaha Block	Under Agreement	56.250	0.180	13.894	Motorable & Traffic Restored.
Construction of I.L.L. R.C.C. Bridge in Karmaha (Pipra Raiwari Mahuwa PMSY Road) to Bhugadhi Road Under Bagaha Block	Under Agreement	29.000	0.120	9.394	Motorable & Traffic Restored.
Mahadev viharwa tola to prathamik vidyalay hote hua bairiya khurd tak pitch road nirman	Out of Agreement	1.255	0.165	0.527	Motorable & Traffic Restored.
Barha Khurd to Mangalpur Semra	Out of Agreement	9.000	0.760	6.112	Motorable & Traffic Restored.
Barwakhurd to Padarkhap Road	Under Agreement	8.400	0.760	5.366	Motorable & Traffic Restored.
BAJRA - MARJADPUR	Out of Agreement	3.938	0.175	4.877	Motorable & Traffic Restored.
BALMIKINAGAR - JHARHARWA	Out of Agreement	6.191	0.820	9.566	Motorable & Traffic Restored.
CHIUTAHIA - KADMAHA	Out of Agreement	5.536	0.130	3.541	Motorable & Traffic Restored.
GONALI - GORAR	Under Agreement	3.236	0.320	11.172	Motorable & Traffic Restored.
MANGALPUR - KUNAI	Out of Agreement	3.372	0.170	3.037	Motorable & Traffic Restored.
SIDHAWA - AMWA	Under Agreement	9.018	0.675	19.209	Motorable & Traffic Restored.
TARWALIA - PACHGAWAN	Out of Agreement	5.496	0.180	7.205	Motorable & Traffic Restored.
Semra to Chiutaha	Out of Agreement	3.050	2.780	31.132	Motorable & Traffic Restored.
Harna Tand to Harnar Deva via Moti Raj Road	Out of Agreement	3.200	0.120	7.247	Motorable & Traffic Restored.
Bharchhi to Taruwa PCC Road	Under Agreement	2.000	0.060	3.047	Motorable & Traffic Restored.
Mangalpur to Semra	Out of Agreement	5.700	0.270	6.530	Motorable & Traffic Restored.
L030-Barwal T03 to Belwa Chukhani (VR10)	Under Agreement	3.900	0.180	3.447	Motorable & Traffic Restored.
Harnatar Road to Karmaha P School	Under Agreement	0.500	0.070	0.35	Motorable & Traffic Restored.
Mahuwa to Katharwa	Under Agreement	5.030	0.370	17.118	Motorable & Traffic Restored.
PWD Road Narwal to Khiriyi	Under Agreement	5.700	0.565	6.381	Motorable & Traffic Restored.
Kata To Jamira	Under Agreement	8.750	0.090	2.415	Motorable & Traffic Restored.
Money Tola to Bairia	Under Agreement	1.000	0.125	7.219	Motorable & Traffic Restored.
Chakdaha Tola to Jhandawa Tola	Under Agreement	2.000	1.900	14.673	Motorable & Traffic Restored.
BELAHWA TO AMHAT	Under Agreement	1.000	0.015	0.85	Motorable & Traffic Restored.

अधीक्षण अभियन्ता का कार्यालय

ग्रामीण कार्य विभाग, कार्य अंचल, बेतिया

पत्रांक-1225 / बेतिया, दिनांक 14/11/2021 /

प्रेषक:-

अधीक्षण अभियन्ता
ग्रामीण कार्य विभाग,
कार्य अंचल, बेतिया।

सेवा में,

कार्यपालक अभियन्ता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, बेतिया / नरकटियागंज / बगहा-1 / बगहा-2

विषय:-

वर्ष 2021 के बाढ़ में क्षतिग्रस्त पथों को मोटरबुल कराने हेतु किये गये कार्यों की जाँच के संबंध में।

प्रसंग:-

महाराष्ट्र,

वाट्स ऐप के माध्यम से प्राप्त विभागीय निदेश के आलोक में।

उपर्युक्त विषय के संबंध में कहना है कि वर्ष 2021 में बाढ़ में क्षतिग्रस्त पथों को मोटरबुल कराने हेतु किये गये कार्यों की जाँच हेतु वाट्स ऐप के माध्यम से विभागीय निदेश प्राप्त हुआ है। जिसमें कार्यपालक अभियन्ता एवम् उनके अधीनस्थ पदाधिकारियों के माध्यम से आर्वाटिड प्रमंडल का जाँच करना है।

अतः विभागीय आदेश के आलोक में क्षतिग्रस्त पथों के जाँच हेतु अधोहस्ताक्षरी के द्वारा जाँच दल का गठन किया जा रहा है तथा जाँच दल दिनांक-22.11.2021 तक जाँच प्रतिवेदन अधोहस्ताक्षरी के समक्ष प्रस्तुत करेंगे। अन्यथा इसकी सारी जवाबदेही जाँचदल की होगी।

—जाँच दल तथा उनके जाँच करने का स्थल निम्नलिखित है:-

क्रमांक	जाँच दल	जाँच स्थल	प्रतिवेदन जमा करने की अंतिम तिथि
1	कार्यपालक अभियन्ता, सहायक अभियन्ता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बेतिया।	ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-1 एवम् नरकटियागंज का जाँच कर जाँच प्रतिवेदन समर्पित करेंगे।	22.11.2021
2	कार्यपालक अभियन्ता, सहायक अभियन्ता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-1।	ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-2 का जाँच कर जाँच प्रतिवेदन समर्पित करेंगे।	22.11.2021
3	कार्यपालक अभियन्ता, सहायक अभियन्ता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-2।	ग्रामीण कार्य विभाग, कार्य प्रमंडल, बेतिया का जाँच कर जाँच प्रतिवेदन समर्पित करेंगे।	22.11.2021

विश्वामाजुन

अधीक्षण अभियन्ता
ग्रा0का0वि0, का0अ0, बेतिया।

कार्यपालक अभियन्ता का कार्यालय

ग्रामीण कार्य विभाग, कार्य प्रमंडल, बेतिया

पत्रांक- / बेतिया दिनांक /

प्रेषक:-

कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, बेतिया।

सेवा में,

अधीक्षक अभियन्ता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, बेतिया।

विषय :-

कार्य प्रमंडल, बगहा-1 में वर्ष 2021 के बाद में अतिग्रस्त पथों को मोटरबुल कराने हेतु किये गये कार्यों की जांच के संबंध में।

प्रसंग:-

भवदीय पत्रांक-1325/बेतिया, दिनांक-14.11.2021 एवम् अभियन्ता प्रमुख, ग्रामीण कार्य विभाग, बिहार, पटना का पत्रांक-मु0अ0-4(मु0) विविध (कार्य)-23-291 /2019-4589, दिनांक-13.11.2021।

महाशय,

उपर्युक्त विषयक एवम् प्रासंगिक पत्र के अनुपालन में कार्य प्रमंडल, बगहा-1 द्वारा उपलब्ध कराये गये मोटरबुल पथों की सूची में अंकित पथों का अधोहस्ताक्षरी द्वारा सहायक अभियन्ता के साथ निरीक्षण किया गया। निरीक्षण के दौरान कार्य प्रमंडल, बगहा-1 द्वारा प्रतिदिन सभी पथों पर कार्य कराया गया है एवम् यातायात वाला है। (क्या गम) मोटरबुल कार्य सम्पन्न है।

सादर सूचनार्थ एवम् अग्रतः कार्रवाई हेतु समर्पित।
अनु0- निरीक्षण किये गये पथों की सूची।

विश्वासभाजन,

[Signature]

कार्यपालक अभियन्ता

ग्रा0का0वि0, का0प्र0, बेतिया।

आपांक- 3246(अनु0) /बेतिया, दिनांक- 25/11/2021 /

प्रतिलिपि:- कार्यपालक अभियन्ता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बगहा-1 को सूचनार्थ सम्प्रेषित।

[Signature]
25.11.21

कार्यपालक अभियन्ता

ग्रा0का0वि0, का0प्र0, बेतिया।

घोषणा-पत्र

1. इस प्राक्कलन को असंबद्ध कार्यपालक अभियन्ता से जॉच करा ली गयी है।
2. अस्थायी पुनर्स्थापन के सामग्री का समायोजन स्थायी पुनर्स्थापन के प्राक्कलन में कर ली गयी है।


25/11/2021

सहायक अभियन्ता/कम्प्यूट अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-1


25/11/2021

कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बगहा-1