

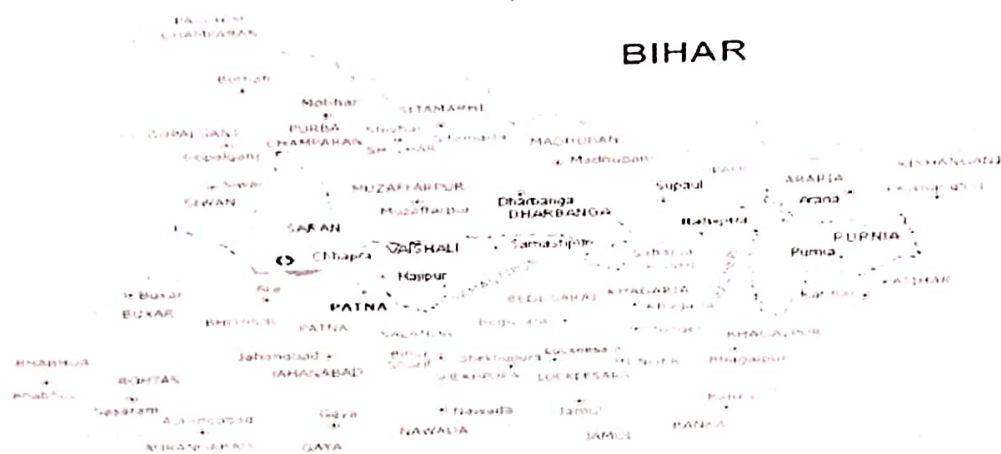


ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

FLOOD DAMAGED REPAIR (F.D.R)

2021-2022



NAME OF THE ROAD : Motorable work of Danapur Naya tola Kailash Shah Ke Ghar se Vijay Singh Chimni hote Hue Shri Rampur Kolhua Road

DISTRICT - GOPALGANJ

BLOCK - MANJHA

TOTAL LENGTH OF ROAD	:	2.900	KM
DAMAGED LENGTH OF ROAD	:	0.630	KM
TOTAL COST OF INITIAL RECTIFICATION FOR MOTORABLE WORK	:	15.274	Lac
CONTIGENCY CHARGE @ 0%	:	0.000	Lac
TOTAL COST OF PROJECT	:	15.274	Lac

SUBMITTED BY:- EXECUTIVE ENGINEER
R.W.D. WORKS DIVISION, GOPALGANJ-2

Inspection Report For Flood Damage Work

Date: 20.12.2021

1. Name of PIUs: R.W.D. Wopalgaonj-2

2. Name of Block/Road: Manjha

A For Road

1. Damage Location/ Chainage : 28 to 300, 123, 125, 128 (B. Sheet attached)

2. Damage Length :

3. Nature of Damage : Flood / Rain (Road not suitable for travelling)

4. Details of Restoration Works :

i. Material being used in Restoration Works : Gravel Bats

ii. Equipments / Tools being used in Restoration Works : JCB, Roller, Tractor

iii. Procedure taken up in Restoration Works : As per SOP

iv. Restored Length :

B For Bridge

1. Damage Location / Chainage :

2. Damage Length :

3. Nature of Damage :

4. Details of Restoration Works :


i. Material being used in Restoration Works :

ii. Equipments / Tools being used in Restoration Works :

iii. Procedure taken up in Restoration Works :

iv. Restored Length :

N.A.


JE 20/12/2021


AE 20-12-21

EE

MA

26/12/21

Signature

(Name of inspector)

GENERAL ABSTRACT OF COST

Flood Damage Repair (FDR)


Block :- Manjha

District:- Gopalganj


Name of Work :- Motorable work of Danapur Naya tola Kailash Shah Ke Ghar se

Length:- 2.90 Km

Sl No.	Description of Item	Amount	Add 12% GST	1% labour Cess	Total
1	Brick Bats	1,351,719.44	162206.333	13517.194	1,527,442.97
2	Sand Bag	0.00	0.00	0	0.00
	Sub Total Rs. :-	1,351,719.44	162,206.33	13,517.19	1,527,442.97
			Say Rs. :-		1,527,443.00


20/12/21

Junior Engineer


20-12-21

Asstt. Engineer


20/12/21

Executive Engineer
R.W.D. Works Division, Gopalganj-2

DETAILED ESTIMATE FOR MOTORABLE WORK

Name of Work :- Motorable work of Danapur Naya tola Kailash Shah Ke Ghar se Vijay singh Chimni hote Hue Shri Rampur Kolhua Road

Length - 2.90 Km

SI No.	Description of Item	Chainage		No.	Length (M)	Avg. width (M)	Avg. Depth (M)	Qty	Unit	Unit rate (in Rs.)	Amount
		From	To								
1	Providing brick bats filled in ditches including all cost of material and labour in all respect complete the job as per direction of Engineer in Charge.	28	33	1	5 00	3 00	0 10	1 50	Cum		
		38	52	1	14 00	3 00	0 10	4 20	Cum		
		59	71	1	12 00	3 00	0 20	7 20	Cum		
		95	125	1	30 00	3 00	0 20	18 00	Cum		
		133	385	2	252 00	2 00	0 60	604 80	Cum		
		400	403	1	3 00	3 00	0 20	1 80	Cum		
		435	447	1	1 00	1 70	0 10	0 17	Cum		
		610	614	1	4 00	3 00	0 20	2 40	Cum		
		622	625	1	3 00	2 20	0 20	1 32	Cum		
		630	637	1	7 00	3 00	0 11	2 31	Cum		
		637	646	1	9 00	3 00	0 30	8 10	Cum		
		652	660	1	8 00	3 00	0 20	4 80	Cum		
		662	667	1	5 00	3 00	0 10	1 50	Cum		
		670	673	1	3 00	3 00	0 20	1 80	Cum		
		682	688	1	6 00	3 00	0 10	1 80	Cum		
		697	701	2	4 00	2 50	0 10	2 00	Cum		
		724	726	1	2 00	3 00	0 15	0 90	Cum		
		750	760	1	10 00	2 00	0 15	3 00	Cum		
		789	843		54 00	3 00	0 30	0 00	Cum		
		843	864	1	21 00	2 00	0 30	12 60	Cum		
		864	873	1	9 00	3 30	0 20	5 94	Cum		
		1113	1119	1	6 00	3 10	0 10	4 96	Cum		
		1124	1134	1	10 00	2 10	0 10	2 10	Cum		
		1153	1157	1	4 00	1 50	0 10	0 60	Cum		
		1171	1188	1	17 00	2 20	0 20	7 48	Cum		
		1260	1319	1	59 00	3 10	0 15	27 44	Cum		
		1422	1484	1	62 00	3 10	0 20	38 44	Cum		
					Total Qty		767 16	Cum	1761 99	1351719 44	
2	Labour for Filling Sand Bag, Stitching and Placing etc. all complete as per specification and direction of E/I.			1	0 00			0 00	No		
				1	0 00			0 00	No		
						Total Qty		0 00	No	17 38	0 00
									Total		1351719 44
								Add 12% GST		162206 33	
								Add 1%		13517 19	
								Sum Total		1527442 97	
Say Rs.										1527443.00	

Qty Rs 15.274 lac

[Signature]
20/12/21

J.E.
Manjha

[Signature]
20-12-21
A.E.

Manjha

[Signature]
20/12/21

E.E.
Gopalganj-2

F.D.R Technically Sanctioned for Rs 15.274 lac (Rupees Fifteen lac Twenty Seven Thousand & Four Hundred only)

[Signature]
21/04/22
अधीक्षण अभियंता
ग्रामीण कार्य विभाग कार्य अंचल-1 मुजफ्फरगढ़